



UL 639

STANDARD FOR SAFETY

Intrusion-Detection Units

[ULNORM.COM](https://www.ulnorm.com) : Click to view the full PDF of UL 639 2019

[ULNORM.COM](https://www.ulnorm.com) : Click to view the full PDF of UL 639 2019

UL Standard for Safety for Intrusion-Detection Units, UL 639

Eighth Edition, Dated August 31, 2007

Summary of Topics

This revision of ANSI/UL 639 dated November 6, 2019 includes Installation and Operating Instructions – Electronic Media Option.

Text that has been changed in any manner or impacted by UL's electronic publishing system is marked with a vertical line in the margin.

The revised requirements are substantially in accordance with Proposal(s) on this subject dated June 7, 2019 and October 4, 2019.

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system, or transmitted in any form by any means, electronic, mechanical photocopying, recording, or otherwise without prior permission of UL.

UL provides this Standard "as is" without warranty of any kind, either expressed or implied, including but not limited to, the implied warranties of merchantability or fitness for any purpose.

In no event will UL be liable for any special, incidental, consequential, indirect or similar damages, including loss of profits, lost savings, loss of data, or any other damages arising out of the use of or the inability to use this Standard, even if UL or an authorized UL representative has been advised of the possibility of such damage. In no event shall UL's liability for any damage ever exceed the price paid for this Standard, regardless of the form of the claim.

Users of the electronic versions of UL's Standards for Safety agree to defend, indemnify, and hold UL harmless from and against any loss, expense, liability, damage, claim, or judgment (including reasonable attorney's fees) resulting from any error or deviation introduced while purchaser is storing an electronic Standard on the purchaser's computer system.

No Text on This Page

[ULNORM.COM](#) : Click to view the full PDF of UL 639 2019

AUGUST 31, 2007
(Title Page Reprinted: November 6, 2019)



ANSI/UL 639-2019

1

UL 639

Standard for Intrusion-Detection Units

First Edition – April, 1964
Second Edition – October, 1969
Third Edition – December, 1971
Fourth Edition – September, 1978
Fifth Edition – September, 1986
Sixth Edition – July, 1993
Seventh Edition – February, 1997

Eighth Edition

August 31, 2007

This ANSI/UL Standard for Safety consists of the Eighth edition including revisions through November 6, 2019.

The most recent designation of ANSI/UL 639 as an American National Standard (ANSI) occurred on October 24, 2019. ANSI approval for a standard does not include the Cover Page, Transmittal Pages, and Title Page.

Comments or proposals for revisions on any part of the Standard may be submitted to UL at any time. Proposals should be submitted via a Proposal Request in UL's On-Line Collaborative Standards Development System (CSDS) at <https://csds.ul.com>.

UL's Standards for Safety are copyrighted by UL. Neither a printed nor electronic copy of a Standard should be altered in any way. All of UL's Standards and all copyrights, ownerships, and rights regarding those Standards shall remain the sole and exclusive property of UL.

COPYRIGHT © 2019 UNDERWRITERS LABORATORIES INC.

No Text on This Page

ULNORM.COM : Click to view the full PDF of UL 639 2019

CONTENTS

INTRODUCTION

1	Scope	7
2	General	7
	2.1 Components	7
	2.2 Units of measurement	7
	2.3 Undated references	7
	2.4 Terminology	8
3	Glossary	8
4	Installation and Operating Instructions	9

CONSTRUCTION – ALL UNITS

ASSEMBLY

5	General	9
6	Test Features	9
7	Enclosure	10
	7.1 General	10
	7.2 Cast metal	17
	7.3 Sheet metal	17
	7.4 Nonmetallic	18
	7.5 Doors and covers	18
	7.6 Screens and expanded metal	20
8	Electric Shock	21
9	Corrosion Protection	22

FIELD WIRING

10	Field Wiring Connections	22
	10.1 General	22
	10.2 Field wiring compartment	22
	10.3 Terminals (general application)	22
	10.4 Terminals (qualified application)	23
	10.5 Field wiring leads	24
	10.6 Cords and plugs	25
11	Polarity Identification	25

INTERNAL WIRING

12	General	26
13	Separation of Circuits	27
14	Bonding for Grounding	27

ELECTRICAL COMPONENTS

15	General	28
	15.1 Insulating materials	28
	15.2 Mounting of parts	28
	15.3 Current carrying parts	29
16	Bushings	29
17	Transformers, Coils, and Relays	29

18	Switches.....	30
19	Overcurrent Protection	30
20	Semiconductors	30

SPACINGS

21	General	30
----	---------------	----

PERFORMANCE – ALL UNITS

22	General	31
	22.1 Test units and data	31
	22.2 Test samples and miscellaneous data	32
	22.3 Test voltages	32
23	Normal Operation Test	32
24	Current Protection Test	32
25	Input Test	33
26	Power-Limited Circuits	33
	26.1 General	33
	26.2 Maximum voltage	36
	26.3 Maximum current	36
	26.4 VA_{max} (Not inherently limited circuits only)	36
27	Electrical Supervision Test	37
28	Sensitivity and Range Tests	37
29	Voltage Variation Test	37
30	Variable Ambient Test	37
31	Humidity Test	38
32	Leakage Current Tests for Cord-Connected Products	38
33	Electric Shock Current Test	41
34	Corrosion Test	45
	34.1 General	45
	34.2 Test equipment	45
35	Overload Test	46
	35.1 General	46
	35.2 Circuits energized from a separate power source	46
36	Endurance Test	47
	36.1 General	47
	36.2 Circuits energized from a separate power source	47
37	Jarring Test	47
38	Vibration Test	48
39	Power Supply Test	48
	39.1 Power supply	48
	39.2 Battery tests	49
40	Power Failure Test	50
41	Dielectric Voltage-Withstand Test	50
42	Static Discharge Test	51
43	Temperature Test	51
44	Abnormal Operation Test	55
45	Transient Tests	55
	45.1 General	55
	45.2 Supply line transients	55
	45.3 Internally induced transients	56
	45.4 Input/output circuit transients	56
46	AC Induction Test	57
47	Radio Frequency Interference	58
	47.1 General	58

47.2	Induced interference	58
47.3	Radiated interference	59
48	Stability Test	59
49	Tests on Polymeric Materials	59
49.1	Temperature test	59
49.2	Flame test	60
50	Battery Replacement Test	60
51	Drop Test	61
52	Strain Relief Test	61
52.1	Power supply cord	61
52.2	Field-wiring leads	61
53	Ignition Through Bottom-Panel Openings Test	61
53.1	General	61
53.2	Hot, flaming oil	62
54	Mechanical Strength Tests for Enclosures	62
55	Special Terminal Assemblies Tests	63
55.1	General	63
55.2	Disconnection and reconnection	63
55.3	Mechanical secureness	63
55.4	Flexing test	63
55.5	Millivolt drop test	64
55.6	Temperature test	64

PERFORMANCE – OUTDOOR USE EQUIPMENT

56	General	64
57	Rain Test	64
58	Dust Test	68

SHORT RANGE RADIO FREQUENCY (RF) DEVICES

59	General	68
----	---------------	----

MANUFACTURING AND PRODUCTION TESTS

60	General	68
61	Production Line Dielectric Voltage-Withstand Tests for High-Voltage Products	69
62	Production Line Grounding Continuity Tests for High-Voltage Cord-Connected Products	69

INSTALLATION AND PERFORMANCE

GENERAL

63	Installation	69
64	Control	70

SPECIFIC DETECTORS

65	Glass Breakage Detector	70
65.1	General	70
65.2	Sensitivity test	70
65.3	Attack test	71
65.4	Stability	71
65.5	Adhesive test	71
66	Photoelectric Detector	72

66.1	Visibility.....	72
66.2	Foreign light.....	72
66.3	Operating speed.....	72
66.4	Beam cutoff.....	72
66.5	Range.....	72
67	Sound Detector.....	73
67.1	General.....	73
67.2	Sensitivity.....	73
68	Movement Detector, Microwave Type.....	73
68.1	General.....	73
68.2	Sensitivity.....	74
68.3	Stability.....	74
68.4	Range.....	74
68.5	Maximum power density.....	75
69	Movement Detector, Sonic or Ultrasonic Type.....	75
69.1	General.....	75
69.2	Sensitivity.....	75
69.3	Stability.....	75
69.4	Range.....	76
70	Movement Detector, Passive Infrared Type.....	76
70.1	General.....	76
70.2	Sensitivity.....	76
70.3	Stability.....	76
70.4	Range.....	77
71	Proximity Detector.....	77
71.1	General.....	77
71.2	Sensitivity.....	77

MARKING

72	General.....	77
73	Marking Permanency Tests.....	79
73.1	General.....	79
73.2	Oven aging.....	79
73.3	Immersion.....	80
73.4	Outdoor exposure.....	80
74	Instructions and Drawings.....	80

ACCESSORY EQUIPMENT

75	General.....	80
76	Construction.....	81
77	Performance (Installation) Test.....	81
78	Markings.....	81

APPENDIX A

Standards for Components.....	82
-------------------------------	----

INTRODUCTION

1 Scope

1.1 These requirements cover intrusion-detection units intended to be used in burglary-protection signaling systems. These units are intended to be used in indoor or outdoor locations to automatically indicate the presence of an intruder by actuating electrical control circuits.

1.2 An intrusion detector, as covered by these requirements, consists of one or more unit assemblies of electrical components that are designed to detect the presence, movement, sound or other activity of an intruder. Provision is made for connection to the assembly of power supply, remote control, and signal circuits by a prescribed method of wiring.

1.3 Intrusion-detection units covered by these requirements are intended to be installed in accordance with the Standard for Installation and Classification of Burglar and Holdup Alarm Systems, UL 681.

2 General

2.1 Components

2.1.1 Except as indicated in [2.1.2](#), a component of a product covered by this standard shall comply with the requirements for that component. See Appendix [A](#) for a list of standards covering components used in the products covered by this standard.

2.1.2 A component is not required to comply with a specific requirement that:

- a) Involves a feature or characteristic not required in the application of the component in the product covered by this standard, or
- b) Is superseded by a requirement in this standard.

2.1.3 A component shall be used in accordance with its rating established for the intended conditions of use.

2.1.4 Specific components are incomplete in construction features or restricted in performance capabilities. Such components are intended for use only under limited conditions, such as certain temperatures not exceeding specified limits, and shall be used only under those specific conditions.

2.2 Units of measurement

2.2.1 Values stated without parentheses are the requirement. Values in parentheses are explanatory or approximate information.

2.2.2 Unless otherwise indicated, all voltage and current values mentioned in this standard are root-mean-square (rms).

2.3 Undated references

2.3.1 Any undated reference to a code or standard appearing in the requirements of this standard shall be interpreted as referring to the latest edition of that code or standard.

2.4 Terminology

2.4.1 The term "product" as used in these requirements refers to all types of household burglar-alarm system units.

2.4.2 Unless otherwise indicated, all voltage and current values in this standard are rms.

3 Glossary

3.1 For the purpose of these requirements, the following definitions apply.

3.2 CIRCUITS, ELECTRICAL –

a) High-Voltage (Class 1) – A circuit involving a potential of not more than 600 volts and having circuit characteristics in excess of those of a low-voltage power-limited circuit.

b) Low-Voltage – A circuit involving a potential of not more than 30 volts AC rms, 42.4 volts peak or direct current (DC).

c) Power-Limited – A circuit wherein the power and current are limited as specified in Power-Limited Circuits, Section [26](#).

d) Class 2 – A circuit in which the voltage and power limitations are in accordance with the requirements of [Table 26.1](#) for AC circuits and [Table 26.2](#) for DC circuits.

e) Class 3 – A circuit in which the voltage and power limitations are in accordance with the requirements of [Table 26.1](#) for AC circuits and [Table 26.2](#) for DC circuits.

3.3 CORD-CONNECTED UNIT – A unit intended for connection to the power source by means of a supply cord. Such a unit is intended to be moved for reasons of interchange or realignment of the units of a system.

3.4 FIXED EQUIPMENT – A product intended to be permanently connected electrically.

3.5 LINE VOLTAGE – The voltage at any field-connected source of supply, nominally 50 – 60 hertz; 115, 208, or 230 volts.

3.6 PORTABLE EQUIPMENT – A cord- and plug-connected product that is capable of being carried or moved about.

3.7 PRIMARY BATTERY – A battery that is not intended to be recharged.

3.8 RADIO FREQUENCY – All frequencies above 20 kilohertz.

3.9 SAFETY CIRCUIT – Any circuit that is relied upon to reduce the risk of fire, electric shock, or unintentional contact with moving parts that may cause injury to persons (an interlock circuit, for example).

3.10 SECONDARY BATTERY – A battery that is intended to be recharged.

3.11 STANDBY CONDITION – The ready-to-operate condition of the product existing prior to being tripped or operated by an intrusion.

3.12 STATIONARY EQUIPMENT – A cord- and plug-connected product that is intended to be fastened in place or located in a dedicated space.

4 Installation and Operating Instructions

4.1 A copy of the installation and operating instructions intended to accompany the product, related schematic wiring diagrams, and installation drawings is to be furnished with the sample submitted for investigation and is to be used as a guide in the examination and test of the product. For this purpose, a final printed edition is not required. The information may be included in a manual.

4.2 The installation and operating instructions shall include such directions and information necessary to accomplish the intended installation, maintenance, and operation of the product and in accordance with the required information of Section [74](#) (Instructions and Drawings).

4.3 The installation and operating instructions containing the information required in [4.1](#) and [4.2](#) and as referenced in other paragraphs in this standard, shall be made available by one or more of the following means:

- a) Printed hardcopy format;
- b) Instructions attached to the product;
- c) Electronic instructions within the basic product software; or
- d) Electronic media such as CD, DVD, thumb drive, website, or equivalent.

4.4 When the installation and operating instructions are included as described in [4.3](#) (a), (c), or (d), they shall be referenced in the product marking by document number and issue date, and/or revision level. Products utilizing electronic media as described in [4.3](#) (c) or (d), shall include information on how to receive a printed copy of the installation and operating instructions.

CONSTRUCTION – ALL UNITS

ASSEMBLY

5 General

5.1 Unless specifically indicated otherwise, the construction requirements specified for a product shall also apply for any remote accessories with which it is to be employed.

6 Test Features

6.1 If provision is made for testing the operability, battery condition, or proximity to alarm of an intrusion-detection unit, the means provided shall be durable, practical, and shall not result in a risk of injury to the personnel involved.

6.2 The test means shall be constructed and located so that unauthorized personnel can not defeat the system.

6.3 The requirements specified in [6.1](#) and [6.2](#) do not apply to a photoelectric unit.

7 Enclosure

7.1 General

7.1.1 The frame and enclosure of the product shall have the strength and rigidity to resist total or partial collapse, with the attendant reduction of spacings, loosening or displacement of parts, or other defects. See the Mechanical Strength Tests for Enclosures, Section [54](#).

7.1.2 An electrical part of a product shall be located or enclosed to provide protection against unintentional contact with uninsulated high-voltage live parts.

7.1.3 An operating part, such as a gear mechanism, light-duty relay, or similar device, shall be enclosed to reduce the risk of malfunction from dust or from other material that may impair its intended operation. See the Dust Test, Section [58](#).

7.1.4 The mounting means of an enclosure shall be accessible without disassembly of any operating part of the product. Removal of a completely assembled panel to mount the enclosure is not considered to be disassembly of an operating part.

7.1.5 An enclosure for other than power-limited circuits shall be constructed to reduce the risk of emission of flame, molten metal, flaming or glowing particles, or flaming drops. See the Abnormal Operation Test, Section [44](#), and the Ignition Through Bottom-Panel Openings Test, Section [53](#).

7.1.6 The requirement in [7.1.5](#) necessitates either a nonflammable bottom in accordance with [7.1.11](#), or a protective barrier as described in [Figure 7.1](#) under all areas containing flammable materials.

Exception: See [7.1.12](#).

7.1.7 A construction using individual barriers under a component or group of components or assemblies, as specified in [Figure 7.1](#) is to be considered as complying with the requirement in [7.1.5](#).

7.1.8 An opening directly over an uninsulated high-voltage live part shall not exceed 0.187 inch (4.75 mm) in any dimension unless the configuration is such that direct entry to uninsulated high-voltage live parts is prevented. See [Figure 7.2](#) for examples of top cover designs and [Figure 7.3](#) for side openings that may be used to prevent direct entry. See also [7.1.9](#).

7.1.9 An opening in the enclosure that will not permit entrance of a 1-inch (25.4-mm) diameter rod shall be sized and so arranged that a probe, as illustrated in [Figure 7.4](#), cannot be made to contact any uninsulated live electrical part (other than low-voltage) when inserted through the opening in a straight or articulated position.

7.1.10 An opening that permits entrance of a 1-inch (25.4-mm) diameter rod may be used under the conditions described in [Figure 7.5](#).

7.1.11 Openings may be provided in the bottom panels or protective pans under areas containing materials not classified as V-1, in accordance with the Standard for Tests for Flammability of Plastic Materials for Parts in Devices and Appliances, UL 94, if constructed in a manner that prevents materials from falling directly from the interior of the product onto the supporting surface or any other location under the product. [Figure 7.6](#) illustrates a type of baffle that complies with this requirement. A second construction that complies with this requirement is a 0.040-inch (1.02-mm) sheet-steel bottom-panel in which are 5/64 inch (2.0-mm) maximum, round holes not closer together than 1/8 inch (3.2 mm) center-to-center. Constructions other than these two may be used if they comply with the Ignition Through Bottom-Panel Openings Test, Section [53](#).


7.1.12 The bottom of the enclosure under areas containing only materials classified as V-1 or better may have openings not larger than 1/16 square inch (40.3 mm²).

7.1.13 An opening, without limitation as to size or number of openings, may be used in areas containing only PVC, TFE, CTFE, FEP, and neoprene insulated wire cable, in areas containing plugs and receptacles, and in areas underneath impedance or thermally-protected motors.

7.1.14 An opening in the enclosure shall not give access to a relay, terminal, control, or related component that might be subject to tampering by hand or with hand tools, wires, hooks, and the like.

ULNORM.COM : Click to view the full PDF of UL 639 2019

Figure 7.1
Protective barrier

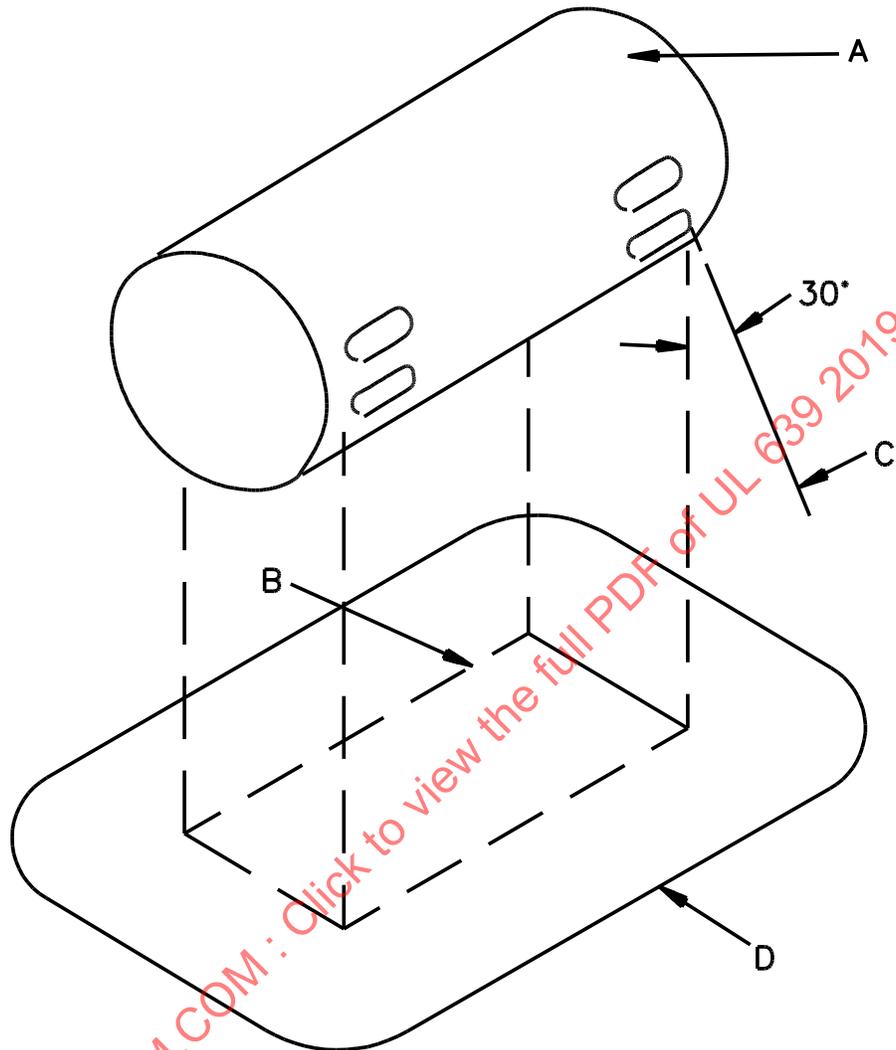

EB110

NOTES


1) The entire component under which a barrier (flat or dished with or without a lip or other raised edge) of nonflammable material is to be provided. The sketch above is a metal enclosed component with ventilating openings to show that the protective barrier is required only for those openings from which flaming parts might come. If the component or assembly does not have its own nonflammable enclosure, the area to be protected would be the entire area occupied by the component or assembly.

2) Projection of the outline of the area of (A) which needs a bottom barrier vertically downward onto the horizontal plane of the lowest point on the outer edge (D) of the barrier.


3) Inclined line that traces out an area (D) on the horizontal plane of the barrier. Moving around the perimeter of the area (B) which needs a bottom barrier, this line projects at a 30-degree angle from the line extending vertically at every point around the perimeter of (A) and oriented to trace out the largest area, except that the angle may be less than 30 degrees if the barrier or portion of the bottom cover contacts a vertical barrier or side panel of nonflammable material, or if the horizontal extension of the barrier (B) to (D) would exceed 6 inches (152 mm).

4) Minimum outline of the barrier, except that the extension B – D need not exceed 6 inches (152 mm) (flat or dished with or without lip or other raised edge). The bottom of the barrier may be flat or formed in any manner provided that every point of area (D) is at or below the lowest point on the outer edge of the barrier.

Figure 7.2
Top panel louver designs

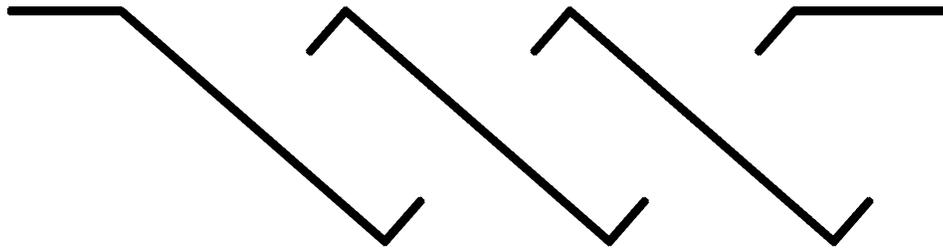

SLANTED OPENINGS

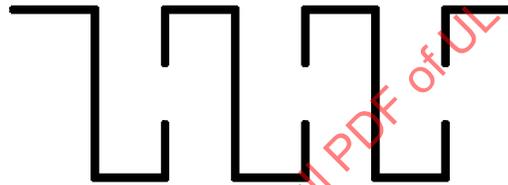

EC500

VERTICAL OPENINGS

ULNORM.COM : Click to view the full PDF of UL 639 2019