

INTERNATIONAL STANDARD



**Photovoltaic devices –
Part 2: Requirements for photovoltaic reference devices**

IECNORM.COM : Click to view the full PDF of IEC 60904-2:2015 RLV



THIS PUBLICATION IS COPYRIGHT PROTECTED

Copyright © 2015 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

IEC Central Office
3, rue de Varembo
CH-1211 Geneva 20
Switzerland

Tel.: +41 22 919 02 11
Fax: +41 22 919 03 00
info@iec.ch
www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigenda or an amendment might have been published.

IEC Catalogue - webstore.iec.ch/catalogue

The stand-alone application for consulting the entire bibliographical information on IEC International Standards, Technical Specifications, Technical Reports and other documents. Available for PC, Mac OS, Android Tablets and iPad.

IEC publications search - www.iec.ch/searchpub

The advanced search enables to find IEC publications by a variety of criteria (reference number, text, technical committee,...). It also gives information on projects, replaced and withdrawn publications.

IEC Just Published - webstore.iec.ch/justpublished

Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and also once a month by email.

Electropedia - www.electropedia.org

The world's leading online dictionary of electronic and electrical terms containing more than 30 000 terms and definitions in English and French, with equivalent terms in 15 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online.

IEC Glossary - std.iec.ch/glossary

More than 60 000 electrotechnical terminology entries in English and French extracted from the Terms and Definitions clause of IEC publications issued since 2002. Some entries have been collected from earlier publications of IEC TC 37, 77, 86 and CISPR.

IEC Customer Service Centre - webstore.iec.ch/csc

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: csc@iec.ch.

IECNORM.COM : Click to view the full text of IEC 60947-2:2015 RVV

INTERNATIONAL STANDARD



**Photovoltaic devices –
Part 2: Requirements for photovoltaic reference devices**

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

ICS 27.160

ISBN 978-2-8322-2231-7

Warning! Make sure that you obtained this publication from an authorized distributor.

CONTENTS

FOREWORD	3
1 Scope and object	5
2 Normative references	5
3 Terms and definitions	6
4 Selection of reference device	8
4.1 General requirements	8
4.2 Additional requirements for single reference cell in a multi-cell package	9
4.3 Additional requirements for reference modules	9
4.4 Requirements for built-in shunt resistors	9
5 Temperature measurement	10
6 Electrical connections	10
7 Calibration	10
8 Data sheet Report	11
9 Marking	12
10 Packaging	12
10.1 Recommended packaging for use in natural sunlight	12
10.2 Recommended packaging for use under solar simulators	12
10.3 Single cell package	12
11 Care of reference devices	12
12 Calibration of secondary reference devices against a primary reference cell	13
12.1 General	13
12.2 Natural sunlight	13
12.3 Simulated sunlight	14
12.4 Test procedure	14
13 Calibration of working solar reference device against a secondary reference solar device	15
Bibliography	16
Figure 1 – Single-cell package	7
Figure 2 – Single Reference cell in a multi-cell package	9

INTERNATIONAL ELECTROTECHNICAL COMMISSION

PHOTOVOLTAIC DEVICES –

Part 2: Requirements for photovoltaic reference devices

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

This redline version of the official IEC Standard allows the user to identify the changes made to the previous edition. A vertical bar appears in the margin wherever a change has been made. Additions are in green text, deletions are in strikethrough red text.

International Standard IEC 60904-2 has been prepared by IEC Technical Committee 82: Solar photovoltaic energy systems.

This third edition cancels and replaces the second edition, published in 2007. It constitutes a technical revision.

The main technical changes with regard to the previous edition are as follows:

- addition of a test procedure in simulated sunlight of subsequent measurement of primary and secondary reference device;
- definition of standard test conditions;
- reduction of allowed diffuse component for secondary reference cell calibration to 20 %.

The text of this standard is based on the following documents:

FDIS	Report on voting
82/893/FDIS	82/918/RVD

Full information on the voting for the approval of this standard can be found in the report on voting indicated in the above table.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

A list of all parts in the IEC 60904 series, published under the general title *Photovoltaic devices*, can be found on the IEC website.

The committee has decided that the contents of this publication will remain unchanged until the stability date indicated on the IEC website under "<http://webstore.iec.ch>" in the data related to the specific publication. At this date, the publication will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

IMPORTANT – The “colour inside” logo on the cover page of this publication indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this publication using a colour printer.

PHOTOVOLTAIC DEVICES –

Part 2: Requirements for **photovoltaic** reference ~~solar~~ devices

1 **Scope and object**

This part of IEC 60904 gives requirements for the classification, selection, packaging, marking, calibration and care of **photovoltaic** reference ~~solar~~ devices.

This standard covers ~~solar~~ **photovoltaic** reference devices used to determine the electrical performance of ~~solar~~ **photovoltaic** cells, modules and arrays under natural and simulated sunlight. It does not cover ~~solar~~ **photovoltaic** reference devices for use under concentrated sunlight.

2 **Normative references**

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60891, *Photovoltaic devices – Procedures for temperature and irradiance corrections to measured I-V characteristics*

IEC 60904-1, *Photovoltaic devices – Part 1: Measurements of photovoltaic current-voltage characteristics*

IEC 60904-3, *Photovoltaic devices – Part 3: Measurement principles for terrestrial photovoltaic (PV) solar devices with reference spectral irradiance data*

IEC 60904-4, *Photovoltaic devices – Part 4: Reference solar devices – Procedures for establishing calibration traceability*

IEC 60904-5, *Photovoltaic devices – Part 5: Determination of the equivalent cell temperature (ECT) of photovoltaic (PV) devices by the open-circuit voltage method*

IEC 60904-7, *Photovoltaic devices – Part 7: Computation of the spectral mismatch correction for measurements of photovoltaic devices*

IEC 60904-8, *Photovoltaic devices – Part 8: Measurement of spectral responsivity of a photovoltaic (PV) device*

IEC 60904-9, *Photovoltaic devices – Part 9: Solar simulator performance requirements*

IEC 60904-10, *Photovoltaic devices – Part 10: Methods of linearity measurement*

~~IEC 61215, Crystalline silicon terrestrial photovoltaic (PV) modules – Design qualification and type approval~~

~~IEC 61646, Thin-film terrestrial photovoltaic (PV) modules – Design qualification and type approval~~

IEC TS 61836, *Solar photovoltaic energy systems – Terms, definitions and symbols*

3 ~~Description~~ Terms and definitions

~~Reference solar devices are specially calibrated devices which are used to measure natural or simulated irradiance or to set simulator irradiance levels for measuring the performance of other solar devices having similar spectral response, optical characteristics, dimensions and electrical circuitry.~~

For the purposes of this document, the terms and definitions given in IEC TS 61836 and the following apply.

3.1 calibration traceability

traceability as defined in IEC 60904-4

Note 1 to entry: Photovoltaic reference devices are distinguished by their position in a chain of calibration traceability ~~as follows~~.

3.2 primary reference device

photovoltaic reference device whose calibration is based on a radiometer or standard detector or standard light source traceable to SI units ~~as defined in IEC 60904-4~~.

3.3 secondary reference device

photovoltaic reference device calibrated in natural or simulated sunlight against a primary reference device.

3.4 working reference device

photovoltaic reference device calibrated in natural or simulated sunlight against a secondary reference device.

3.5 ~~Construction of reference devices~~

~~Depending on their intended use, reference devices need to meet different requirements in terms of their mechanical construction, optical properties and electrical circuit. The following types are in use~~

reference devices

specially calibrated photovoltaic devices which are used to measure natural or simulated irradiance or to set simulator irradiance levels for measuring the performance of other photovoltaic devices

3.6 reference cell

~~A reference~~ single photovoltaic cell used primarily for transfer of calibration values

Note 1 to entry: For practical reasons, such cells are small in surface area, and are usually mounted on a fixture which ensures reproducibility in mounting, thermal control and electrical connections. A typical sample is sketched in Figure 1.

~~Recommended use: laboratory primary and secondary reference.~~

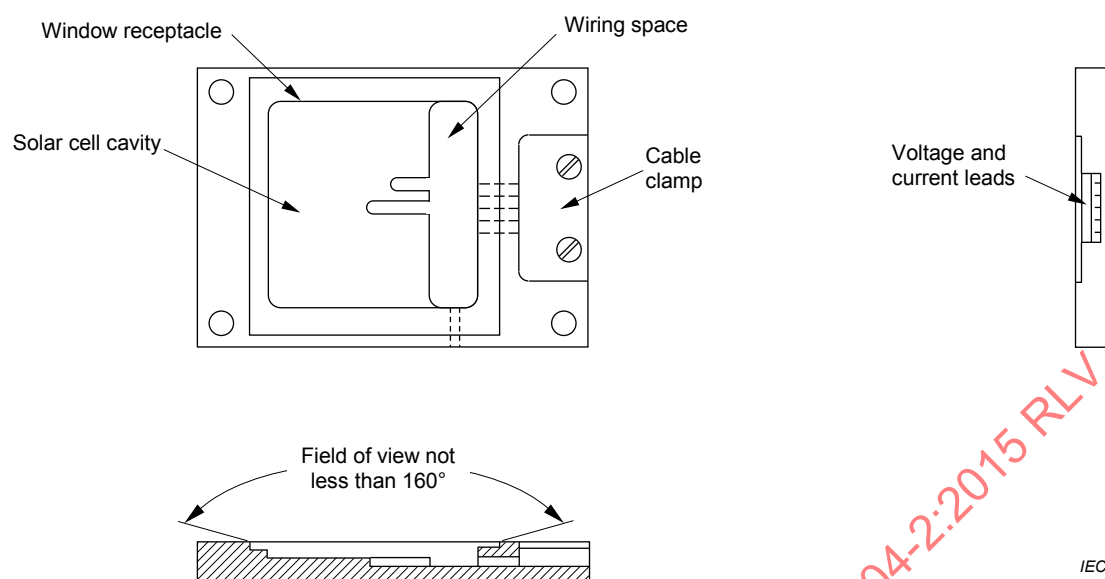


Figure 1 – Single-cell package

3.6.1

reference cell with protective cover **but** without encapsulant

photovoltaic reference cell similar to 3.6, but provided with a protective cover

Note 1 to entry: Recommended use: as a laboratory primary, secondary and working reference, in particular when ~~calibrating~~ measuring the performance of other photovoltaic devices using solar simulators or ~~when calibrating outdoors~~ natural sunlight with direct beam only.

3.6.2

encapsulated reference cell

photovoltaic reference cell similar to 3.6, but encapsulated in a protective assembly so as to withstand short-term outdoor exposure

Note 1 to entry: Recommended use: as a laboratory primary, secondary and working reference, in particular when ~~calibration in measurements of the performance of other photovoltaic devices under~~ natural sunlight are performed.

Note 2 to entry: If the encapsulation system has been demonstrated to withstand long-term outdoor exposure, applying test levels according to IEC 61215, such reference cells may also be suitable to be used as a monitoring device for long-term assessment of operational photovoltaic arrays.

3.7

multi-cell reference devices

~~A reference device matching the mechanical and optical features of a test specimen, and responds to variations in the geometrical distribution of the incident radiation in the same way as the test specimens.~~

photovoltaic device consisting of several photovoltaic cells

Note 1 to entry: Recommended use: as the diffuse component of natural sunlight and non-normal incidence of simulated sunlight interact with encapsulants and back sheets of a module and influence the amount of ~~irradiation~~ **irradiance** which a particular cell receives, it is recommended that reference devices used for measuring sub-assemblies of modules and arrays be encapsulated in a multi-cell package, ~~simulating the neighbouring optical parameters matching the mechanical and optical features~~ of a the test specimen (module, sub-assemblies of modules, arrays) ~~and reflectivity of the front cover so as to respond to variations in the geometrical distribution of the incident radiation in the same way as the test specimen.~~

3.8

single reference cell in a multi-cell package

single photovoltaic cell mounted in such a package that frame, encapsulation system, shape, size and spacing of the cells surrounding ~~the reference cell shall be~~ it are the same as in the module to be tested.

Note 1 to entry: The surrounding cells may be real or dummies that have the same optical properties. ~~The dotted line in Figure 1 indicates the minimum acceptable size of the multi-cell package for outdoor testing.~~

3.9

reference module

~~photovoltaic module~~ consisting of the encapsulation of a series and/or parallel connection of ~~solar~~ photovoltaic cells

Note 1 to entry: ~~The use of a full-size reference module is recommended in-~~ Recommended use: for measuring other modules in order to achieve correspondence of dimensions, mechanical construction, optical properties and electrical circuitry of the reference module and test ~~specimen module~~, so as to minimize discrepancies due to simulator non-uniformity, internal reflections or temperature distribution.

3.10

built-in shunt resistors

~~For practical reasons, reference devices may be shunted by a precision resistor. In order to avoid user-provided means of establishing short circuit condition. In such cases, the precision resistor should be chosen such as to ensure that the reference device operates sufficiently near to short-circuit condition, meeting the requirement:~~

$$I_{SC} \times R_{CAL} < 0,03 \times V_{OC}$$

~~where~~

~~R_{CAL} is the precision shunt resistor;~~

~~I_{SC} is the short circuit current of the reference device at reference conditions;~~

~~V_{OC} is the open circuit voltage at reference conditions.~~

~~The long term stability of such resistors shall also meet the stability requirements of the reference device. Calibration values of such reference devices shall be stated with the dimension [V·W⁻¹·m²], if the calibration has been performed on the voltage drop across the shunt resistor. The temperature coefficient of the built-in shunt resistor is part of the temperature coefficient of the calibration value of the reference device.~~

~~NOTE It is recommended that the shunt resistor be a removable 4-wire resistor, to allow for periodic checking of the reference device stability by taking an IV curve per IEC 60904-1.~~

resistor connected across the output terminals of photovoltaic devices

Note 1 to entry: The resistor shunts the output of the photovoltaic device providing an output voltage to be measured and avoiding user provided means of establishing short circuit condition.

4 Selection of reference device

4.1 General requirements

Depending on their intended use, reference devices need to meet different requirements in terms of their spectral responsivity, mechanical construction, optical properties, dimensions and electrical circuit. The spectral responsivity of the reference device, for example, is determined by the transmission of any protective cover in front of the device and the spectral responsivity of the device itself. Therefore the overall spectral responsivity can be adapted by using suitable filters as or in addition to the protective cover.

A reference device shall meet the following requirements:

- photovoltaic characteristics shall be stable according to the requirements in Clause 11;
- the output signal of the reference device shall vary linearly with irradiance, as defined in IEC 60904-10, over the range of interest.

4.2 Additional requirements for single reference cell in a multi-cell package

The dotted line in Figure 2 indicates the minimum acceptable size of a multi-cell package.

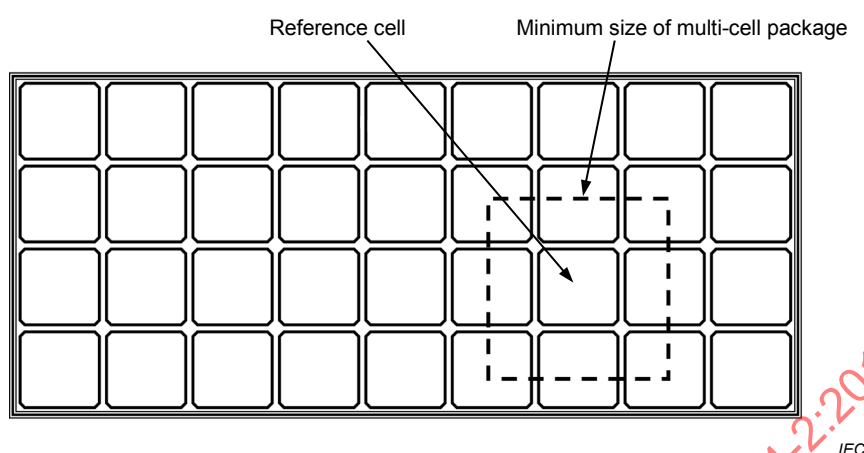


Figure 2 – ~~Single~~ Reference cell in a multi-cell package

4.3 Additional requirements for reference modules

Additional requirements apply to reference modules:

- a) ~~it should not contain~~ Bypass diodes:
 - general reference modules, that are used to measure a range of module types and geometries, should not contain bypass diodes. The presence or absence of bypass diodes shall be noted and considered in conjunction with the measurement conditions, in particular spatial non-uniformity of the irradiance on the module during measurement;
 - for reference modules, that are intended to be matched to the module under test, the number, type and connection of bypass diodes (if present) shall match those in the module under test.
- b) If they are made from discrete cells, these shall be matched ~~in short-circuit current and fill factor within ±2 %~~ as follows depending on the intended use of the reference module:
 - if only the short circuit current of the reference module will be used the short circuit current of the individual cells shall be matched to within ± 1 %;
 - if other parameters (such as maximum power) are used additionally or exclusively, both the short circuit current and the fill factor of the individual cells shall be matched to within ± 1 %.

The matching of the individual cells is the responsibility of the manufacturer of the reference module, bearing in mind that matching may also be influenced by encapsulation or lamination. The cell matching needs not be checked by the calibration laboratory. However, if I-V curves of the reference module indicate inconsistent response (i.e. steps are noted in the I-V curve), the I-V curve should be measured under light that is known to be uniform (e.g. natural sunlight) to determine whether there is evidence that the cells within the module are matched within 1 %. If the module exhibits evidence of > 1 % mismatch between cells, the module shall not be used as reference module.

4.4 Requirements for built-in shunt resistors

The resistor shall be chosen such as to ensure that the reference device operates sufficiently near to short-circuit condition, meeting the requirement:

$$I_{SC} \times R_{CAL} < 0,03 \times V_{OC} \quad (1)$$

where

R_{CAL} is the shunt resistor;

I_{SC} is the short circuit current of the reference device at reference conditions;

V_{OC} is the open circuit voltage at reference conditions.

If a shunted reference cell does not meet the requirement of formula (1), it shall only be used at irradiances ($\pm 5\%$) and temperatures ($\pm 2\text{ °C}$) at which it was calibrated.

The long-term stability of such resistors shall also meet the stability requirements of the reference device. Calibration values of such reference devices shall be measured as the voltage drop across the shunt resistor and stated with the dimension [V] at standard test conditions (see Clause 7). The temperature coefficient of the built-in shunt resistor is part of the temperature coefficient of the calibration value of the reference device. As the uncertainty in the calibration may be strongly dependent on the shunt resistor stability and temperature coefficient, respective values should be provided with the reference cell data sheet.

If a shunted reference cell is to be used for low irradiance measurements, either a dedicated cell can be constructed with the restriction of formula (1), where the short circuit current is considered at the desired low irradiance rather than at STC. Alternatively a shunted cell can have a larger shunt resistor, but requires a separate calibration for each irradiance and temperature it is to be used at.

It is recommended that the shunt resistor be a removable 4-wire resistor, to allow for periodic checking of the reference device stability by taking an I-V curve per IEC 60904-1.

Formula (1) means that the measured output voltage of a shunted reference cell shall be less than 3 % of its open circuit voltage. For typical crystalline Silicon this equates to about 20 mV output.

5 Temperature measurement

Means shall be provided for determining the reference cell temperature or, for reference modules, the equivalent cell temperature (ECT), according to IEC 60904-5. The required uncertainty for temperature measurements shall be less than $\pm 2,0\text{ °C}$ for all reference devices. A minimum accuracy of $\pm 1,0\text{ °C}$ for the temperature sensor is suggested to achieve this uncertainty in the temperature measurement.

6 Electrical connections

The electrical connections to reference cells shall consist of a four-wire contact system (Kelvin probe). Care shall be taken to avoid measurement errors due to voltage drops along the cell's contact bars and the package wiring.

The electrical connections to the reference module shall be designed to meet the requirements of IEC 60904-1 ~~(Clause 4)~~.

7 Calibration

Each reference device shall be calibrated in terms of its calibration value at the desired reference conditions, normally standard test conditions (STC) ($1\,000\text{ W}\cdot\text{m}^{-2}$, 25 °C device temperature with the reference spectral irradiance distribution as defined in IEC 60904-3).

Methods for calibrating primary reference devices are included in IEC 60904-4. A method of calibrating secondary reference devices is described in Clause 12. The calibration of working reference devices is treated in Clause 13.

The ~~relative spectral response of responsivity at~~ short-circuit current ~~conditions~~ of each reference device shall be measured in accordance with IEC 60904-8. If for reference modules this cannot be measured directly, it shall be deduced from measurements made on representative encapsulated ~~solar photovoltaic~~ cells.

The temperature coefficient of each reference device shall be measured in accordance with IEC 60891.

8 ~~Data sheet Report~~

Each time a reference device is calibrated, the following information shall be recorded on a data sheet:

- Identification number
- Type (primary reference cell; secondary reference device, working reference device)
- Cell manufacturer
- Material type
- Type of package
- Type and dimension of cell(s)
- Circuit diagram, in particular of any connectors
- Calibration organization
- Site and date of calibration
- Method of calibration (refer to standard)
- Radiometer or standard lamp characteristics (where applicable)
- Primary reference cell identification (where applicable)
- Simulator characteristics (where applicable)
- Type of temperature sensor (where applicable)
- ~~Relative spectral response~~ Spectral responsivity
- Temperature coefficient of calibration value
- Calibration value at reference conditions
- Reference conditions
- Estimated uncertainty
- Shunt resistor nominal resistance and temperature coefficient (where applicable)
- Either the mismatch correction value used in the measurement or an estimate of the uncertainty introduced by using the mismatched reference device.

For reference cells without fixed electrical connection to the cell, the following information shall be recorded on the data sheet:

- Illustration of type, shape and location of electrical contacts during calibration.

For reference modules, the following information shall be recorded in addition on the data sheet:

- manufacturer
- model designation
- serial number
- cell technology
- construction and dimensions of module
- electrical circuit layout

- presence or absence of bypass diodes and if present their number and type.

9 Marking

The reference device shall carry a clear, indelible serial or identification number for cross-reference to its data sheet.

10 Packaging

10.1 Recommended packaging for use in natural sunlight

The reference device used for measurement in natural sunlight ~~shall~~ should respond to variations in the geometrical distribution of the incident radiation in the same way as the test specimens (cells, sub-assemblies of cells, modules). As encapsulants and back sheets respond to the diffuse component of natural sunlight, it is recommended that reference cells used for measuring modules be enclosed in a multi-cell package (see Figure 2), simulating the neighbouring optical parameters of a module.

In this case, the frame, the encapsulation system, the shape, and the size and spacing of the cells surrounding the reference cell shall be the same as in the module to be tested. The surrounding cells may be real or dummies that have the same optical properties. The dotted line in Figure 2 indicates the minimum acceptable size of the multi-cell package for outdoor testing.

10.2 Recommended packaging for use under solar simulators

In some simulators which allow multiple reflections of light to and from the test specimen, the irradiance in the test plane may change depending on whether or not the test specimen is present.

Therefore, in order to measure accurately the irradiance that will be present when the test specimen is in place, the reference ~~cells devices~~ used in such simulators shall be packaged in the same way as the test specimen, so that the change in irradiance due to multiple reflections is the same for both the reference ~~cell device~~ and the test specimen.

Reference cells used for measurements in simulators designed to minimize any error from multi-reflected light may be packaged singly or, if not intended for day-to-day use, mounted in the unpackaged state on a temperature controlled block.

Alternatively, the requirements given for reference cells for use in natural sunlight may be followed.

10.3 Single cell package

If a single cell package is used, the following recommendations are made:

- The field of view should be at least 160°.
- All surfaces in the package within the cell's field of view should be non-reflective, with an absorption of at least 0,95 in the cell's wavelength ~~response~~ responsivity band.
- The material used for bonding the cell to the holder should be resistant to degradation, either electrically or optically. Its physical characteristics should remain stable over the entire period of intended use.
- The use of a protective window is recommended. If encapsulated, the space between the window and the cell should be filled with a stable ~~transparent~~ encapsulant. **Both the protective window and the encapsulant should be transparent over the wavelength range in which the PV reference device has a non-zero spectral responsivity.** The refractive index of the encapsulant should be similar (within 10 %) to that of the

window to minimize errors due to the internal reflection of light. The transparency, homogeneity and adhesion of the encapsulant should not be adversely affected by ultra-violet light and operational temperatures.

- e) The protective window may embody a filter to match the spectral ~~response~~ **responsivity** of the reference cell to that of the test specimen, provided that the other requirements of d) are met.

Figure 1 shows an example of a suitable single cell package. Other suitable single cell packages can be found in JIS C8910 ~~and C8911~~ or the World Photovoltaic Scale ~~found in the reference C.R. Osterwald, S. Anevsky, K. Bücher, A.K. Barua, P. Chaudhuri, J. Dubard, K. Emery, B. Hansen, D. King, J. Metzdorf, F. Nagamine, R. Shimokawa, Y.X. Wang, T. Witchen, W. Zaiman, A. Zastrow, and J. Zhang, "The World Photovoltaic Scale: An International Reference Cell Calibration Program," *Progress in Photovoltaics Research and Applications*, vol. 7, pp. 287-297, 1999 (see Bibliography).~~

11 Care of reference devices

It is recommended that reference devices be recalibrated on an annual basis.

The window of a packaged reference device shall be kept clean and scratch-free.

Uncovered reference cells shall be preserved against damage, contamination and degradation.

A reference device exhibiting any defect which might impair its function shall not be used.

~~If~~ The calibration value of a reference device ~~has changed~~ might change systematically as a function of time for successive calibrations. If the calibration value of a reference device has changed by more than 1 % with respect to its previous calibration or by more than 5 % of its initial calibration, it shall not be used as a reference device.

12 Calibration of secondary reference devices against a primary reference cell

12.1 General

This Clause describes a procedure for calibrating a secondary reference device in natural or simulated sunlight against a primary reference cell whose calibration is traceable to SI units according to IEC 60904-4. The spectral ~~response match~~ **responsivity mismatch** between the primary reference cell and that of the secondary reference device under the illumination used for the calibration shall be determined according to IEC 60904-7. If the spectral mismatch correction is less than 1 %, the mismatch correction may be omitted.

The procedure can be applied using both natural and simulated sunlight according to the requirements in IEC 60904-1 with the following restrictions.

12.2 Natural sunlight

Calibration in natural sunlight shall be carried out under the following conditions:

- a) Clear, sunny weather, with the diffuse irradiance not greater than ~~30~~ 20 % of the global irradiance.
- b) No observable cloud formations.
- c) Total irradiance (sun + sky + ground reflection) not less than $800 \text{ W}\cdot\text{m}^{-2}$, as measured by the primary reference cell.
- d) Air mass between AM1 and AM2.
- e) Radiation sufficiently stable so that the variation in reference cell output signal is less than $\pm 0,5 \%$ over the time taken for a measurement.

12.3 Simulated sunlight

~~If simulated sunlight is used~~ The simulated sunlight for calibration can either be continuous or pulsed. Normally the primary reference cell and the secondary reference device are positioned side by side and measured simultaneously. In this case, the simulator shall be of Class AAA in accordance with IEC 60904-9 with the additional requirement that the non-uniformity of irradiance is less than $\pm 1\%$ within the surface that includes the device to be calibrated and the primary reference device. The requirement of class A with respect to temporal instability as defined in IEC 60904-9 needs only be met for the short term instability (STI) as the long term instability (LTI) is not relevant in this case. In case that the primary and secondary reference device are of the same or similar size (ratio of active areas between 0,5 and 2,0), an additional measurement shall be taken exchanging their positions. A valid result is only obtained if both measurements agree within the measurement uncertainty.

If the requirement of non-uniformity of less than $\pm 1\%$ cannot be met for calibrating reference modules made from a series connection of cells, the simulator shall be class A for spatial non-uniformity and a detailed uncertainty analysis shall be provided taking into account mismatch in short-circuit current of the individual cells.

In the special case that the primary reference cell and the secondary reference device are of the same or similar size (ratio of active areas between 0,5 and 2,0) and that the continuous simulated sunlight is stable, the two devices can be placed in the same position one after the other and measured consecutively. In this case the simulator shall be of Class AAA in accordance with IEC 60904-9 with the additional requirement that the LTI of irradiance is less than $\pm 1\%$, where the LTI is with respect to the total time period needed for the measurements. A pulsed solar simulator may also be suitable if the repeatability of each pulse is better than 1 %. This shall be recorded using a suitable monitor cell.

In any case a detailed measurement uncertainty analysis considering both, spatial and temporal non-uniformity of the simulated sunlight needs to be provided, considering the specifics of the chosen measurement strategy.

12.4 Test procedure

12.4.1 Before the initial calibration, measure the ~~relative spectral response~~ responsivity and temperature coefficient of short circuit current of the secondary reference device, using the procedures specified in IEC 60904-8, ~~IEC 61215 or IEC 61646~~ and IEC 60891, respectively. Whenever a change in the calibration value at the reference conditions of more than 2 % with respect to this initial calibration is detected, the measurements of spectral responsivity and temperature coefficient shall be repeated.

12.4.2 Adjust the mount so that the devices are normal to the light source within $\pm 5^\circ$.

- Mount the primary reference cell and the secondary reference device co-planar within $\pm 1^\circ$ and in close proximity on the same mount (for simultaneous measurement).
- Mount the primary reference cell in the designated position (for consecutive measurement).

12.4.3 Control the cell temperature of both the primary reference cell and the secondary reference device at $(25 \pm 2)^\circ\text{C}$. Where this is not practical, readings of output signal ~~must~~ shall be subsequently corrected to 25°C in accordance with IEC 60891.

12.4.4 The spectral mismatch shall be corrected according to IEC 60904-7. Appropriate measurements of the spectral irradiance shall be recorded.

12.4.5 Record simultaneous readings of the output signal and temperature:

- of both primary reference cell and secondary reference device (for simultaneous measurement) ~~The spectral irradiance shall be determined. For outdoor measurements the spectral irradiance shall be measured while the output signals are measured.~~

- of the primary reference cell, (for consecutive measurement).

12.4.6 Repeat step 12.4.5 until five successive sets of readings are obtained in which:

- the ratio of the output signals (corrected to 25 °C and for spectral mismatch as required) does not vary by more than $\pm 0,5 \%$ (for simultaneous measurement),
- the output signals for the primary reference cell (corrected to 25 °C and for spectral mismatch as required) do not vary by more than $\pm 0,5 \%$; then remove primary reference cell and mount the secondary reference device in the same position and repeat step 12.4.5 with the same constraints as for the primary reference cell (for consecutive measurement).

12.4.7 If the primary reference cell and the secondary reference device are of the same or similar size (ratio of active areas between 0,5 and 2,0) and are measured simultaneously, exchange the position between the primary reference cell and the secondary reference device and repeat steps 12.4.5 and 12.4.6.

12.4.8 When calibrating in natural sunlight, steps 12.4.2 to 12.4.6, inclusive, shall be performed at least twice a day on at least three separate days.

12.4.9 From the acceptable data, calculate the ratio:

$$\frac{\text{Output signal of secondary reference device at 25 °C}}{\text{Output signal of primary reference cell at 25 °C}}$$

12.4.10 Multiply the calibration value of the primary reference cell by the calculated:

- mean of the ratios (for simultaneous measurement);
- ratio of the means of the output signals (for consecutive measurement),

to obtain the calibration value of the secondary reference device. If measurements have been taken with the positions of the primary reference cell and the secondary reference device exchanged, calculate the calibration value for both cases. The results are only valid if both agree within the measurement uncertainty. Both values are to be reported and their geometric average is to be used as the calibration value.

13 Calibration of working ~~solar~~ reference device against a secondary ~~solar~~ reference device

For calibration of a working ~~solar~~ reference device against secondary ~~solar~~ reference device the above procedure may be applied, omitting the spectral mismatch correction if the secondary and working ~~standard reference~~ are of the same material and construction, otherwise the same procedure as described in Clause 12 should be applied.

Bibliography

JIS C8910, *Primary reference solar cells*

C.R. Osterwald, S. Anevsky, K. Bücher, A.K. Barua, P. Chaudhuri, J. Dubard, K. Emery, B. Hansen, D. King, J. Metzdorf, F. Nagamine, R. Shimokawa, Y.X. Wang, T. Witchen, W. Zaaiman, A. Zastrow, and J. Zhang, "The World Photovoltaic Scale: An International Reference Cell Calibration Program", *Progress in Photovoltaics Research and Applications*, vol. 7, pp. 287-297, 1999

IECNORM.COM : Click to view the full PDF of IEC 60904-2:2015 RLV

INTERNATIONAL STANDARD

NORME INTERNATIONALE

Photovoltaic devices –

Part 2: Requirements for photovoltaic reference devices

Dispositifs photovoltaïques –

Partie 2: Exigences applicables aux dispositifs photovoltaïques de référence

IECNORM.COM : Click to view the full PDF of IEC 60904-2:2015 RLV

CONTENTS

FOREWORD.....	3
1 Scope.....	5
2 Normative references.....	5
3 Terms and definitions	5
4 Selection of reference device	7
4.1 General requirements	7
4.2 Additional requirements for single reference cell in a multi-cell package	8
4.3 Additional requirements for reference modules	8
4.4 Requirements for built-in shunt resistors	8
5 Temperature measurement	9
6 Electrical connections	9
7 Calibration.....	9
8 Report.....	10
9 Marking	11
10 Packaging	11
10.1 Recommended packaging for use in natural sunlight.....	11
10.2 Recommended packaging for use under solar simulators	11
10.3 Single cell package	11
11 Care of reference devices	12
12 Calibration of secondary reference devices against a primary reference cell	12
12.1 General.....	12
12.2 Natural sunlight.....	12
12.3 Simulated sunlight.....	13
12.4 Test procedure.....	13
13 Calibration of working reference device against a secondary reference device	14
Bibliography	15
Figure 1 – Single-cell package	6
Figure 2 – Single reference cell in a multi-cell package.....	8

INTERNATIONAL ELECTROTECHNICAL COMMISSION

PHOTOVOLTAIC DEVICES –

Part 2: Requirements for photovoltaic reference devices

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

International Standard IEC 60904-2 has been prepared by IEC Technical Committee 82: Solar photovoltaic energy systems.

This third edition cancels and replaces the second edition, published in 2007. It constitutes a technical revision.

The main technical changes with regard to the previous edition are as follows:

- addition of a test procedure in simulated sunlight of subsequent measurement of primary and secondary reference device;
- definition of standard test conditions;
- reduction of allowed diffuse component for secondary reference cell calibration to 20 %.

The text of this standard is based on the following documents:

FDIS	Report on voting
82/893/FDIS	82/918/RVD

Full information on the voting for the approval of this standard can be found in the report on voting indicated in the above table.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

A list of all parts in the IEC 60904 series, published under the general title *Photovoltaic devices*, can be found on the IEC website.

The committee has decided that the contents of this publication will remain unchanged until the stability date indicated on the IEC website under "<http://webstore.iec.ch>" in the data related to the specific publication. At this date, the publication will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

IECNORM.COM : Click to view the full PDF of IEC 60904-2:2015 RLV

PHOTOVOLTAIC DEVICES –

Part 2: Requirements for photovoltaic reference devices

1 Scope

This part of IEC 60904 gives requirements for the classification, selection, packaging, marking, calibration and care of photovoltaic reference devices.

This standard covers photovoltaic reference devices used to determine the electrical performance of photovoltaic cells, modules and arrays under natural and simulated sunlight. It does not cover photovoltaic reference devices for use under concentrated sunlight.

2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60891, *Photovoltaic devices – Procedures for temperature and irradiance corrections to measured I-V characteristics*

IEC 60904-1, *Photovoltaic devices – Part 1: Measurements of photovoltaic current-voltage characteristics*

IEC 60904-3, *Photovoltaic devices – Part 3: Measurement principles for terrestrial photovoltaic (PV) solar devices with reference spectral irradiance data*

IEC 60904-4, *Photovoltaic devices – Part 4: Reference solar devices – Procedures for establishing calibration traceability*

IEC 60904-5, *Photovoltaic devices – Part 5: Determination of the equivalent cell temperature (ECT) of photovoltaic (PV) devices by the open-circuit voltage method*

IEC 60904-7, *Photovoltaic devices – Part 7: Computation of the spectral mismatch correction for measurements of photovoltaic devices*

IEC 60904-8, *Photovoltaic devices – Part 8: Measurement of spectral responsivity of a photovoltaic (PV) device*

IEC 60904-9, *Photovoltaic devices – Part 9: Solar simulator performance requirements*

IEC 60904-10, *Photovoltaic devices – Part 10: Methods of linearity measurement*

IEC TS 61836, *Solar photovoltaic energy systems – Terms, definitions and symbols*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in IEC TS 61836 and the following apply.

3.1

calibration traceability

traceability as defined in IEC 60904-4

Note 1 to entry: Photovoltaic reference devices are distinguished by their position in a chain of calibration traceability.

3.2

primary reference device

photovoltaic reference device whose calibration is based on a radiometer or standard detector or standard light source traceable to SI units as defined in IEC 60904-4

3.3

secondary reference device

photovoltaic reference device calibrated in natural or simulated sunlight against a primary reference device

3.4

working reference device

photovoltaic reference device calibrated in natural or simulated sunlight against a secondary reference device

3.5

reference devices


specially calibrated photovoltaic devices which are used to measure natural or simulated irradiance or to set simulator irradiance levels for measuring the performance of other photovoltaic devices

3.6

reference cell

single photovoltaic cell used primarily for transfer of calibration values

Note 1 to entry: For practical reasons, such cells are small in surface area, and are usually mounted on a fixture which ensures reproducibility in mounting, thermal control and electrical connections. A typical sample is sketched in Figure 1.

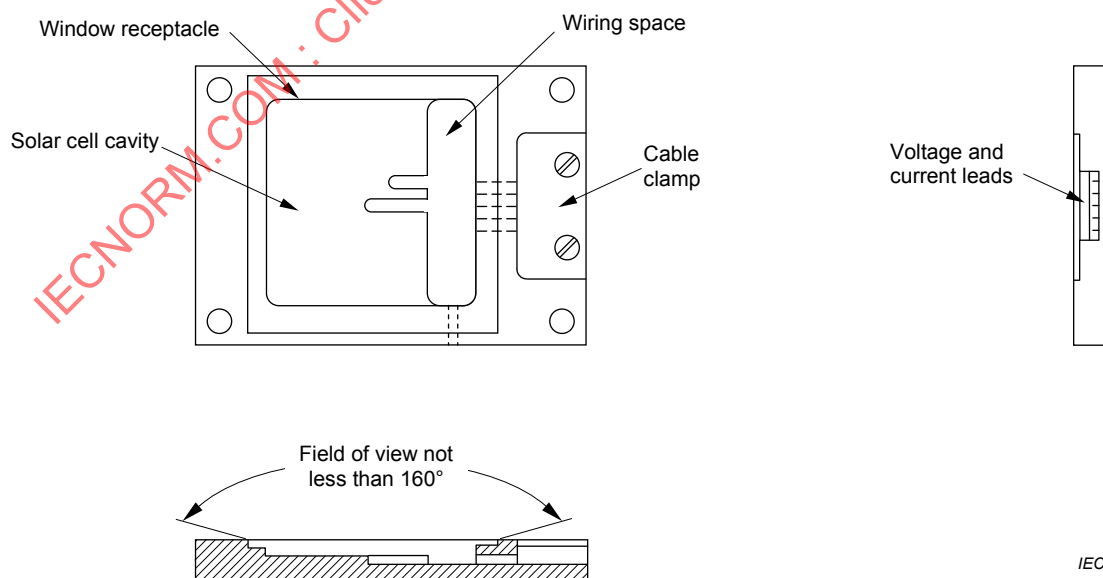

IEC

Figure 1 – Single-cell package

3.6.1

reference cell with protective cover but without encapsulant

photovoltaic reference cell similar to 3.6, but provided with a protective cover

Note 1 to entry: Recommended use: as a laboratory primary, secondary and working reference, in particular when measuring the performance of other photovoltaic devices using solar simulators or natural sunlight with direct beam only.

3.6.2

encapsulated reference cell

photovoltaic reference cell similar to 3.6, but encapsulated in a protective assembly so as to withstand short-term outdoor exposure

Note 1 to entry: Recommended use: as a laboratory primary, secondary and working reference, in particular when measurements of the performance of other photovoltaic devices under natural sunlight are performed.

Note 2 to entry: If the encapsulation system has been demonstrated to withstand long-term outdoor exposure, applying test levels according to IEC 61215, such reference cells may also be suitable to be used as a monitoring device for long-term assessment of operational photovoltaic arrays.

3.7

multi-cell reference devices

photovoltaic device consisting of several photovoltaic cells

Note 1 to entry: Recommended use: as the diffuse component of natural sunlight and non-normal incidence of simulated sunlight interact with encapsulants and back sheets of a module and influence the amount of irradiance which a particular cell receives, it is recommended that reference devices used for measuring sub-assemblies of modules and arrays be encapsulated in a multi-cell package, matching the mechanical and optical features of the test specimen (module, sub-assemblies of modules, arrays) so as to respond to variations in the geometrical distribution of the incident radiation in the same way as the test specimen.

3.8

single reference cell in a multi-cell package

single photovoltaic cell mounted in such a package that frame, encapsulation system, shape, size and spacing of the cells surrounding it are the same as in the module to be tested

Note 1 to entry: The surrounding cells may be real or dummies that have the same optical properties.

3.9

reference module

photovoltaic module consisting of the encapsulation of a series and/or parallel connection of photovoltaic cells

Note 1 to entry: Recommended use: for measuring other modules in order to achieve correspondence of dimensions, mechanical construction, optical properties and electrical circuitry of the reference module and test module, so as to minimize discrepancies due to simulator non-uniformity, internal reflections or temperature distribution.

3.10 built-in shunt resistors

resistor connected across the output terminals of photovoltaic devices

Note 1 to entry: The resistor shunts the output of the photovoltaic device providing an output voltage to be measured and avoiding user-provided means of establishing short circuit condition.

4 Selection of reference device

4.1 General requirements

Depending on their intended use, reference devices need to meet different requirements in terms of their spectral responsivity, mechanical construction, optical properties, dimensions and electrical circuit. The spectral responsivity of the reference device, for example, is determined by the transmission of any protective cover in front of the device and the spectral responsivity of the device itself. Therefore the overall spectral responsivity can be adapted by using suitable filters as or in addition to the protective cover.

A reference device shall meet the following requirements:

- a) photovoltaic characteristics shall be stable according to the requirements in Clause 11;

- b) the output signal of the reference device shall vary linearly with irradiance, as defined in IEC 60904-10, over the range of interest.

4.2 Additional requirements for single reference cell in a multi-cell package

The dotted line in Figure 2 indicates the minimum acceptable size of a multi-cell package.

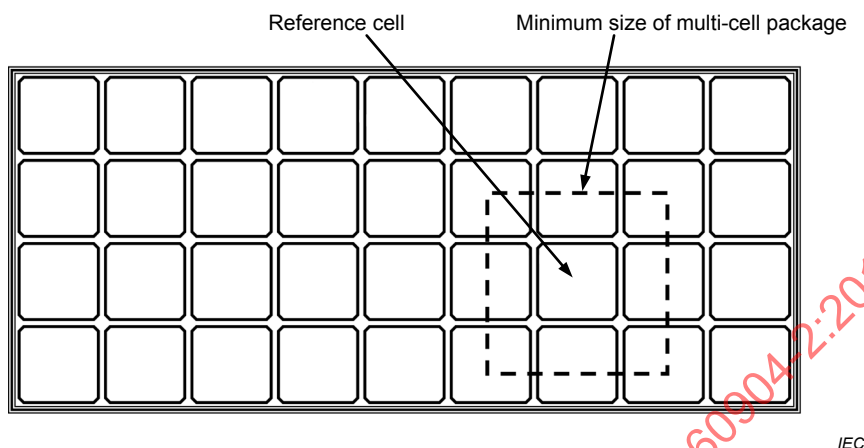


Figure 2 – Single reference cell in a multi-cell package

4.3 Additional requirements for reference modules

Additional requirements apply to reference modules:

a) Bypass diodes:

- general reference modules, that are used to measure a range of module types and geometries, should not contain bypass diodes. The presence or absence of bypass diodes shall be noted and considered in conjunction with the measurement conditions, in particular spatial non-uniformity of the irradiance on the module during measurement;
- for reference modules, that are intended to be matched to the module under test, the number, type and connection of bypass diodes (if present) shall match those in the module under test.

b) If they are made from discrete cells, these shall be matched as follows depending on the intended use of the reference module:

- if only the short circuit current of the reference module will be used the short circuit current of the individual cells shall be matched to within $\pm 1\%$;
- if other parameters (such as maximum power) are used additionally or exclusively, both the short circuit current and the fill factor of the individual cells shall be matched to within $\pm 1\%$.

The matching of the individual cells is the responsibility of the manufacturer of the reference module, bearing in mind that matching may also be influenced by encapsulation or lamination. The cell matching needs not be checked by the calibration laboratory. However, if I-V curves of the reference module indicate inconsistent response (i.e. steps are noted in the I-V curve), the I-V curve should be measured under light that is known to be uniform (e.g. natural sunlight) to determine whether there is evidence that the cells within the module are matched within 1 %. If the module exhibits evidence of $> 1\%$ mismatch between cells, the module shall not be used as reference module.

4.4 Requirements for built-in shunt resistors

The resistor shall be chosen such as to ensure that the reference device operates sufficiently near to short-circuit condition, meeting the requirement:

$$I_{SC} \times R_{CAL} < 0,03 \times V_{OC} \quad (1)$$

where

R_{CAL} is the shunt resistor;

I_{SC} is the short circuit current of the reference device at reference conditions;

V_{OC} is the open circuit voltage at reference conditions.

If a shunted reference cell does not meet the requirement of formula (1), it shall only be used at irradiances ($\pm 5\%$) and temperatures ($\pm 2\text{ °C}$) at which it was calibrated.

The long-term stability of such resistors shall also meet the stability requirements of the reference device. Calibration values of such reference devices shall be measured as the voltage drop across the shunt resistor and stated with the dimension [V] at standard test conditions (see Clause 7). The temperature coefficient of the built-in shunt resistor is part of the temperature coefficient of the calibration value of the reference device. As the uncertainty in the calibration may be strongly dependent on the shunt resistor stability and temperature coefficient, respective values should be provided with the reference cell data sheet.

If a shunted reference cell is to be used for low irradiance measurements, either a dedicated cell can be constructed with the restriction of formula (1), where the short circuit current is considered at the desired low irradiance rather than at STC. Alternatively a shunted cell can have a larger shunt resistor, but requires a separate calibration for each irradiance and temperature it is to be used at.

It is recommended that the shunt resistor be a removable 4-wire resistor, to allow for periodic checking of the reference device stability by taking an I-V curve per IEC 60904-1.

Formula (1) means that the measured output voltage of a shunted reference cell shall be less than 3 % of its open circuit voltage. For typical crystalline Silicon this equates to about 20 mV output.

5 Temperature measurement

Means shall be provided for determining the reference cell temperature or, for reference modules, the equivalent cell temperature (ECT), according to IEC 60904-5. The required uncertainty for temperature measurements shall be less than $\pm 2,0\text{ °C}$ for all reference devices. A minimum accuracy of $\pm 1,0\text{ °C}$ for the temperature sensor is suggested to achieve this uncertainty in the temperature measurement.

6 Electrical connections

The electrical connections to reference cells shall consist of a four-wire contact system (Kelvin probe). Care shall be taken to avoid measurement errors due to voltage drops along the cell's contact bars and the package wiring.

The electrical connections to the reference module shall be designed to meet the requirements of IEC 60904-1.

7 Calibration

Each reference device shall be calibrated in terms of its calibration value at the desired reference conditions, normally standard test conditions (STC) ($1\,000\text{ W}\cdot\text{m}^{-2}$, 25 °C device temperature with the reference spectral irradiance distribution as defined in IEC 60904-3).

Methods for calibrating primary reference devices are included in IEC 60904-4. A method of calibrating secondary reference devices is described in Clause 12. The calibration of working reference devices is treated in Clause 13.

The spectral responsivity at short-circuit current conditions of each reference device shall be measured in accordance with IEC 60904-8. If for reference modules this cannot be measured directly, it shall be deduced from measurements made on representative encapsulated photovoltaic cells.

The temperature coefficient of each reference device shall be measured in accordance with IEC 60891.

8 Report

Each time a reference device is calibrated, the following information shall be recorded on a data sheet:

- Identification number
- Type (primary reference cell; secondary reference device, working reference device)
- Cell manufacturer
- Material type
- Type of package
- Type and dimension of cell(s)
- Circuit diagram, in particular of any connectors
- Calibration organization
- Site and date of calibration
- Method of calibration (refer to standard)
- Radiometer or standard lamp characteristics (where applicable)
- Primary reference cell identification (where applicable)
- Simulator characteristics (where applicable)
- Type of temperature sensor (where applicable)
- Spectral responsivity
- Temperature coefficient of calibration value
- Calibration value at reference conditions
- Reference conditions
- Estimated uncertainty
- Shunt resistor nominal resistance and temperature coefficient (where applicable)
- Either the mismatch correction value used in the measurement or an estimate of the uncertainty introduced by using the mismatched reference device.

For reference cells without fixed electrical connection to the cell, the following information shall be recorded on the data sheet:

- Illustration of type, shape and location of electrical contacts during calibration.

For reference modules, the following information shall be recorded in addition on the data sheet:

- manufacturer
- model designation
- serial number

- cell technology
- construction and dimensions of module
- electrical circuit layout
- presence or absence of bypass diodes and if present their number and type.

9 Marking

The reference device shall carry a clear, indelible serial or identification number for cross-reference to its data sheet.

10 Packaging

10.1 Recommended packaging for use in natural sunlight

The reference device used for measurement in natural sunlight should respond to variations in the geometrical distribution of the incident radiation in the same way as the test specimens (cells, sub-assemblies of cells, modules). As encapsulants and back sheets respond to the diffuse component of natural sunlight, it is recommended that reference cells used for measuring modules be enclosed in a multi-cell package (see Figure 2), simulating the neighbouring optical parameters of a module.

In this case, the frame, the encapsulation system, the shape, and the size and spacing of the cells surrounding the reference cell shall be the same as in the module to be tested. The surrounding cells may be real or dummies that have the same optical properties. The dotted line in Figure 2 indicates the minimum acceptable size of the multi-cell package for outdoor testing.

10.2 Recommended packaging for use under solar simulators

In some simulators which allow multiple reflections of light to and from the test specimen, the irradiance in the test plane may change depending on whether or not the test specimen is present. Therefore, in order to measure accurately the irradiance that will be present when the test specimen is in place, the reference devices used in such simulators shall be packaged in the same way as the test specimen, so that the change in irradiance due to multiple reflections is the same for both the reference device and the test specimen.

Reference cells used for measurements in simulators designed to minimize any error from multi-reflected light may be packaged singly or, if not intended for day-to-day use, mounted in the unpackaged state on a temperature controlled block.

Alternatively, the requirements given for reference cells for use in natural sunlight may be followed.

10.3 Single cell package

If a single cell package is used, the following recommendations are made:

- a) The field of view should be at least 160°.
- b) All surfaces in the package within the cell's field of view should be non-reflective, with an absorption of at least 0,95 in the cell's wavelength responsivity band.
- c) The material used for bonding the cell to the holder should be resistant to degradation, either electrically or optically. Its physical characteristics should remain stable over the entire period of intended use.
- d) The use of a protective window is recommended. If encapsulated, the space between the window and the cell should be filled with a stable encapsulant. Both the protective window and the encapsulant should be transparent over the wavelength range in which the PV

reference device has a non-zero spectral responsivity. The refractive index of the encapsulant should be similar (within 10 %) to that of the window to minimize errors due to the internal reflection of light. The transparency, homogeneity and adhesion of the encapsulant should not be adversely affected by ultra-violet light and operational temperatures.

- e) The protective window may embody a filter to match the spectral responsivity of the reference cell to that of the test specimen, provided that the other requirements of d) are met.

Figure 1 shows an example of a suitable single cell package. Other suitable single cell packages can be found in JIS C8910 or the World Photovoltaic Scale (see Bibliography).

11 Care of reference devices

It is recommended that reference devices be recalibrated on an annual basis.

The window of a packaged reference device shall be kept clean and scratch-free.

Uncovered reference cells shall be preserved against damage, contamination and degradation.

A reference device exhibiting any defect which might impair its function shall not be used.

The calibration value of a reference device might change systematically as a function of time for successive calibrations. If the calibration value of a reference device has changed by more than 1 % with respect to its previous calibration or by more than 5 % of its initial calibration, it shall not be used as a reference device.

12 Calibration of secondary reference devices against a primary reference cell

12.1 General

This Clause describes a procedure for calibrating a secondary reference device in natural or simulated sunlight against a primary reference cell whose calibration is traceable to SI units according to IEC 60904-4. The spectral responsivity mismatch between the primary reference cell and that of the secondary reference device under the illumination used for the calibration shall be determined according to IEC 60904-7. If the spectral mismatch correction is less than 1 %, the mismatch correction may be omitted.

The procedure can be applied using both natural and simulated sunlight according to the requirements in IEC 60904-1 with the following restrictions.

12.2 Natural sunlight

Calibration in natural sunlight shall be carried out under the following conditions:

- a) Clear, sunny weather, with the diffuse irradiance not greater than 20 % of the global irradiance.
- b) No observable cloud formations.
- c) Total irradiance (sun + sky + ground reflection) not less than $800 \text{ W} \cdot \text{m}^{-2}$, as measured by the primary reference cell.
- d) Air mass between AM1 and AM2.
- e) Radiation sufficiently stable so that the variation in reference cell output signal is less than $\pm 0,5 \%$ over the time taken for a measurement.

12.3 Simulated sunlight

The simulated sunlight for calibration can either be continuous or pulsed. Normally the primary reference cell and the secondary reference device are positioned side by side and measured simultaneously. In this case the simulator shall be of Class AAA in accordance with IEC 60904-9 with the additional requirement that the non-uniformity of irradiance is less than $\pm 1\%$ within the surface that includes the device to be calibrated and the primary reference device. The requirement of class A with respect to temporal instability as defined in IEC 60904-9 needs only be met for the short term instability (STI) as the long term instability (LTI) is not relevant in this case. In case that the primary and secondary reference device are of the same or similar size (ratio of active areas between 0,5 and 2,0), an additional measurement shall be taken exchanging their positions. A valid result is only obtained if both measurements agree within the measurement uncertainty.

If the requirement of non-uniformity of less than $\pm 1\%$ cannot be met for calibrating reference modules made from a series connection of cells, the simulator shall be class A for spatial non-uniformity and a detailed uncertainty analysis shall be provided taking into account mismatch in short-circuit current of the individual cells.

In the special case that the primary reference cell and the secondary reference device are of the same or similar size (ratio of active areas between 0,5 and 2,0) and that the continuous simulated sunlight is stable, the two devices can be placed in the same position one after the other and measured consecutively. In this case the simulator shall be of Class AAA in accordance with IEC 60904-9 with the additional requirement that the LTI of irradiance is less than $\pm 1\%$, where the LTI is with respect to the total time period needed for the measurements. A pulsed solar simulator may also be suitable if the repeatability of each pulse is better than 1 %. This shall be recorded using a suitable monitor cell.

In any case a detailed measurement uncertainty analysis considering both, spatial and temporal non-uniformity of the simulated sunlight needs to be provided, considering the specifics of the chosen measurement strategy.

12.4 Test procedure

12.4.1 Before the initial calibration, measure the spectral responsivity and temperature coefficient of short circuit current of the secondary reference device, using the procedures specified in IEC 60904-8 and IEC 60891, respectively. Whenever a change in the calibration value at the reference conditions of more than 2 % with respect to this initial calibration is detected, the measurements of spectral responsivity and temperature coefficient shall be repeated.

12.4.2 Adjust the mount so that the devices are normal to the light source within $\pm 5^\circ$.

- Mount the primary reference cell and the secondary reference device co-planar within $\pm 1^\circ$ and in close proximity on the same mount (for simultaneous measurement).
- Mount the primary reference cell in the designated position (for consecutive measurement).

12.4.3 Control the cell temperature of both the primary reference cell and the secondary reference device at $(25 \pm 2)^\circ\text{C}$. Where this is not practical, readings of output signal shall be subsequently corrected to 25°C in accordance with IEC 60891.

12.4.4 The spectral mismatch shall be corrected according to IEC 60904-7. Appropriate measurements of the spectral irradiance shall be recorded.

12.4.5 Record simultaneous readings of the output signal and temperature:

- of both primary reference cell and secondary reference device (for simultaneous measurement),
- of the primary reference cell, (for consecutive measurement).

12.4.6 Repeat step 12.4.5 until five successive sets of readings are obtained in which:

- the ratio of the output signals (corrected to 25 °C and for spectral mismatch as required) does not vary by more than $\pm 0,5$ % (for simultaneous measurement),
- the output signals for the primary reference cell (corrected to 25 °C and for spectral mismatch as required) do not vary by more than $\pm 0,5$ %; then remove primary reference cell and mount the secondary reference device in the same position and repeat step 12.4.5 with the same constraints as for the primary reference cell (for consecutive measurement).

12.4.7 If the primary reference cell and the secondary reference device are of the same or similar size (ratio of active areas between 0,5 and 2,0) and are measured simultaneously, exchange the position between the primary reference cell and the secondary reference device and repeat steps 12.4.5 and 12.4.6.

12.4.8 When calibrating in natural sunlight, steps 12.4.2 to 12.4.6, inclusive, shall be performed at least twice a day on at least three separate days.

12.4.9 From the acceptable data, calculate the ratio:

$$\frac{\text{Output signal of secondary reference device at } 25\text{ °C}}{\text{Output signal of primary reference cell at } 25\text{ °C}}$$

12.4.10 Multiply the calibration value of the primary reference cell by the calculated:

- mean of the ratios (for simultaneous measurement);
- ratio of the means of the output signals (for consecutive measurement),

to obtain the calibration value of the secondary reference device. If measurements have been taken with the positions of the primary reference cell and the secondary reference device exchanged, calculate the calibration value for both cases. The results are only valid if both agree within the measurement uncertainty. Both values are to be reported and their geometric average is to be used as the calibration value.

13 Calibration of working reference device against a secondary reference device

For calibration of a working reference device against secondary reference device the above procedure may be applied, omitting the spectral mismatch correction if the secondary and working reference are of the same material and construction, otherwise the same procedure as described in Clause 12 should be applied.

Bibliography

JIS C8910, *Primary reference solar cells*

C.R. Osterwald, S. Anevsky, K. Bücher, A.K. Barua, P. Chaudhuri, J. Dubard, K. Emery, B. Hansen, D. King, J. Metzdorf, F. Nagamine, R. Shimokawa, Y.X. Wang, T. Witchen, W. Zaaiman, A. Zastrow, and J. Zhang, "The World Photovoltaic Scale: An International Reference Cell Calibration Program", *Progress in Photovoltaics Research and Applications*, vol. 7, pp. 287-297, 1999

IECNORM.COM : Click to view the full PDF of IEC 60904-2:2015 RLV

SOMMAIRE

AVANT-PROPOS	17
1 Domaine d'application.....	19
2 Références normatives	19
3 Termes et définitions	20
4 Sélection des dispositifs de référence	22
4.1 Exigences générales	22
4.2 Exigences supplémentaires pour une cellule de référence unique dans un boîtier multicellule	22
4.3 Exigences supplémentaires pour les modules de référence	23
4.4 Exigences pour les résistances de shunt intégrées	23
5 Mesure de la température	24
6 Connexions électriques.....	24
7 Etalonnage	24
8 Rapport	25
9 Marquage	26
10 Conditionnement	26
10.1 Conditionnement recommandé pour l'utilisation en rayonnement lumineux solaire naturel	26
10.2 Conditionnement recommandé pour l'utilisation avec simulateurs solaires	26
10.3 Boîtier pour cellule individuelle	26
11 Précautions relatives aux dispositifs de référence	27
12 Étalonnage des dispositifs secondaires de référence par rapport à une cellule primaire de référence.....	27
12.1 Généralités	27
12.2 Rayonnement lumineux solaire naturel	27
12.3 Rayonnement lumineux solaire simulé	28
12.4 Procédure d'essai	28
13 Etalonnage du dispositif de travail de référence par rapport à un dispositif secondaire de référence	29
Bibliographie	30
Figure 1 – Boîtier d'une cellule individuelle.....	21
Figure 2 – Cellule de référence unique dans un boîtier multicellule	22

COMMISSION ÉLECTROTECHNIQUE INTERNATIONALE

DISPOSITIFS PHOTOVOLTAÏQUES –

Partie 2: Exigences applicables aux dispositifs
photovoltaïques de référence

AVANT-PROPOS

- 1) La Commission Electrotechnique Internationale (IEC) est une organisation mondiale de normalisation composée de l'ensemble des comités électrotechniques nationaux (Comités nationaux de l'IEC). L'IEC a pour objet de favoriser la coopération internationale pour toutes les questions de normalisation dans les domaines de l'électricité et de l'électronique. A cet effet, l'IEC – entre autres activités – publie des Normes internationales, des Spécifications techniques, des Rapports techniques, des Spécifications accessibles au public (PAS) et des Guides (ci-après dénommés "Publication(s) de l'IEC"). Leur élaboration est confiée à des comités d'études, aux travaux desquels tout Comité national intéressé par le sujet traité peut participer. Les organisations internationales, gouvernementales et non gouvernementales, en liaison avec l'IEC, participent également aux travaux. L'IEC collabore étroitement avec l'Organisation Internationale de Normalisation (ISO), selon des conditions fixées par accord entre les deux organisations.
- 2) Les décisions ou accords officiels de l'IEC concernant les questions techniques représentent, dans la mesure du possible, un accord international sur les sujets étudiés, étant donné que les Comités nationaux de l'IEC intéressés sont représentés dans chaque comité d'études.
- 3) Les Publications de l'IEC se présentent sous la forme de recommandations internationales et sont agréées comme telles par les Comités nationaux de l'IEC. Tous les efforts raisonnables sont entrepris afin que l'IEC s'assure de l'exactitude du contenu technique de ses publications; l'IEC ne peut pas être tenue responsable de l'éventuelle mauvaise utilisation ou interprétation qui en est faite par un quelconque utilisateur final.
- 4) Dans le but d'encourager l'uniformité internationale, les Comités nationaux de l'IEC s'engagent, dans toute la mesure possible, à appliquer de façon transparente les Publications de l'IEC dans leurs publications nationales et régionales. Toutes divergences entre toutes Publications de l'IEC et toutes publications nationales ou régionales correspondantes doivent être indiquées en termes clairs dans ces dernières.
- 5) L'IEC elle-même ne fournit aucune attestation de conformité. Des organismes de certification indépendants fournissent des services d'évaluation de conformité et, dans certains secteurs, accèdent aux marques de conformité de l'IEC. L'IEC n'est responsable d'aucun des services effectués par les organismes de certification indépendants.
- 6) Tous les utilisateurs doivent s'assurer qu'ils sont en possession de la dernière édition de cette publication.
- 7) Aucune responsabilité ne doit être imputée à l'IEC, à ses administrateurs, employés, auxiliaires ou mandataires, y compris ses experts particuliers et les membres de ses comités d'études et des Comités nationaux de l'IEC, pour tout préjudice causé en cas de dommages corporels et matériels, ou de tout autre dommage de quelque nature que ce soit, directe ou indirecte, ou pour supporter les coûts (y compris les frais de justice) et les dépenses découlant de la publication ou de l'utilisation de cette Publication de l'IEC ou de toute autre Publication de l'IEC, ou au crédit qui lui est accordé.
- 8) L'attention est attirée sur les références normatives citées dans cette publication. L'utilisation de publications référencées est obligatoire pour une application correcte de la présente publication.
- 9) L'attention est attirée sur le fait que certains des éléments de la présente Publication de l'IEC peuvent faire l'objet de droits de brevet. L'IEC ne saurait être tenue pour responsable de ne pas avoir identifié de tels droits de brevets et de ne pas avoir signalé leur existence.

La Norme internationale IEC 60904-2 a été établie par le comité d'études 82 de l'IEC: Systèmes de conversion photovoltaïque de l'énergie solaire.

Cette troisième édition annule et remplace la seconde édition, publiée en 2007, dont elle constitue une révision technique.

Par rapport à l'édition précédente, les modifications techniques majeures sont les suivantes:

- ajout d'une procédure d'essai en rayonnement lumineux solaire simulé d'une mesure suivante de dispositifs primaires et secondaires de référence;
- définition des conditions normalisées d'essai;

- diminution de la composante diffuse autorisée pour l'étalonnage à 20 % de la cellule secondaire de référence.

Le texte de cette norme est issu des documents suivants:

FDIS	Rapport de vote
82/893/FDIS	82/918/RVD

Le rapport de vote indiqué dans le tableau ci-dessus donne toute information sur le vote ayant abouti à l'approbation de la présente norme.

Cette publication a été rédigée selon les Directives ISO/IEC, Partie 2.

Une liste de toutes les parties de la série IEC 60904, publiées sous le titre général *Dispositifs photovoltaïques*, peut être consultée sur le site web de l'IEC.

Le comité a décidé que le contenu de cette publication ne sera pas modifié avant la date de stabilité indiquée sur le site web de l'IEC sous "<http://webstore.iec.ch>" dans les données relatives à la publication recherchée. A cette date, la publication sera

- reconduite,
- supprimée,
- remplacée par une édition révisée, ou
- amendée.

IECNORM.COM : Click to view the full PDF of IEC 60904-2:2015 RLV

DISPOSITIFS PHOTOVOLTAÏQUES –

Partie 2: Exigences applicables aux dispositifs photovoltaïques de référence

1 Domaine d'application

La présente partie de l'IEC 60904 donne les exigences relatives à la classification, à la sélection, au conditionnement, au marquage, à l'étalonnage et aux précautions d'utilisation des dispositifs photovoltaïques de référence.

La présente norme couvre les dispositifs photovoltaïques de référence utilisés pour déterminer les performances électriques des cellules, modules et panneaux photovoltaïques sous rayonnement lumineux solaire naturel et simulé. Elle ne couvre pas les dispositifs photovoltaïques de référence pour une utilisation sous rayonnement lumineux solaire concentré.

2 Références normatives

Les documents suivants sont cités en référence de manière normative, en intégralité ou en partie, dans le présent document et sont indispensables pour son application. Pour les références datées, seule l'édition citée s'applique. Pour les références non datées, la dernière édition du document de référence s'applique (y compris les éventuels amendements).

IEC 60891, *Dispositifs photovoltaïques – Procédures pour les corrections en fonction de la température et de l'éclairement à appliquer aux caractéristiques I-V mesurées*

IEC 60904-1, *Dispositifs photovoltaïques – Partie 1: Mesure des caractéristiques courant-tension des dispositifs photovoltaïques*

IEC 60904-3, *Dispositifs photovoltaïques – Partie 3: Principes de mesure des dispositifs solaires photovoltaïques (PV) à usage terrestre incluant les données de l'éclairement spectral de référence*

IEC 60904-4, *Dispositifs photovoltaïques – Partie 4: Dispositifs solaires de référence – Procédures pour établir la traçabilité de l'étalonnage*

IEC 60904-5, *Dispositifs photovoltaïques – Partie 5: Détermination de la température de cellule équivalente (ECT) des dispositifs photovoltaïques (PV) par la méthode de la tension en circuit ouvert*

IEC 60904-7, *Dispositifs photovoltaïques – Partie 7: Calcul de la correction de désadaptation des réponses spectrales dans les mesures de dispositifs photovoltaïques*

IEC 60904-8, *Dispositifs photovoltaïques – Partie 8: Mesure de la sensibilité spectrale d'un dispositif photovoltaïque (PV)*

IEC 60904-9, *Dispositifs photovoltaïques – Partie 9: Exigences pour le fonctionnement des simulateurs solaires*

IEC 60904-10, *Dispositifs photovoltaïques – Partie 10: Méthodes de mesure de la linéarité*

IEC TS 61836, *Solar photovoltaic energy systems – Terms, definitions and symbols*
(disponible en anglais uniquement)

3 Termes et définitions

Pour les besoins du présent document, les termes et définitions de l'IEC TS 61836, ainsi que les suivants s'appliquent.

3.1

traçabilité de l'étalonnage

traçabilité comme définie dans l'IEC 60904-4

Note 1 à l'article: Les dispositifs photovoltaïques de référence se distinguent par leur position dans une chaîne de traçabilité de l'étalonnage.

3.2

dispositif primaire de référence

dispositif photovoltaïque de référence dont l'étalonnage est basé sur un radiomètre, sur un détecteur normalisé ou sur une source de rayonnement lumineux normalisée traçable en unités SI, comme défini dans l'IEC 60904-4

3.3

dispositif secondaire de référence

dispositif photovoltaïque de référence étalonné en rayonnement lumineux solaire naturel ou simulé par rapport à un dispositif primaire de référence

3.4

dispositif de travail de référence

dispositif photovoltaïque de référence étalonné en rayonnement lumineux solaire naturel ou simulé par rapport à un dispositif secondaire de référence

3.5

dispositifs de référence

dispositifs photovoltaïques étalonnés spécifiquement utilisés pour mesurer l'éclairement naturel ou simulé ou pour régler les niveaux d'éclairement du simulateur pour mesurer les performances d'autres dispositifs photovoltaïques

3.6

cellule de référence

cellule photovoltaïque unique utilisée essentiellement pour fournir des valeurs d'étalonnage

Note 1 à l'article: Pour des raisons pratiques, de telles cellules ont de petites surfaces, et sont généralement montées sur un support qui assure la reproductibilité du montage, de la commande thermique et des connexions électriques. Un exemple type est esquissé à la Figure 1.

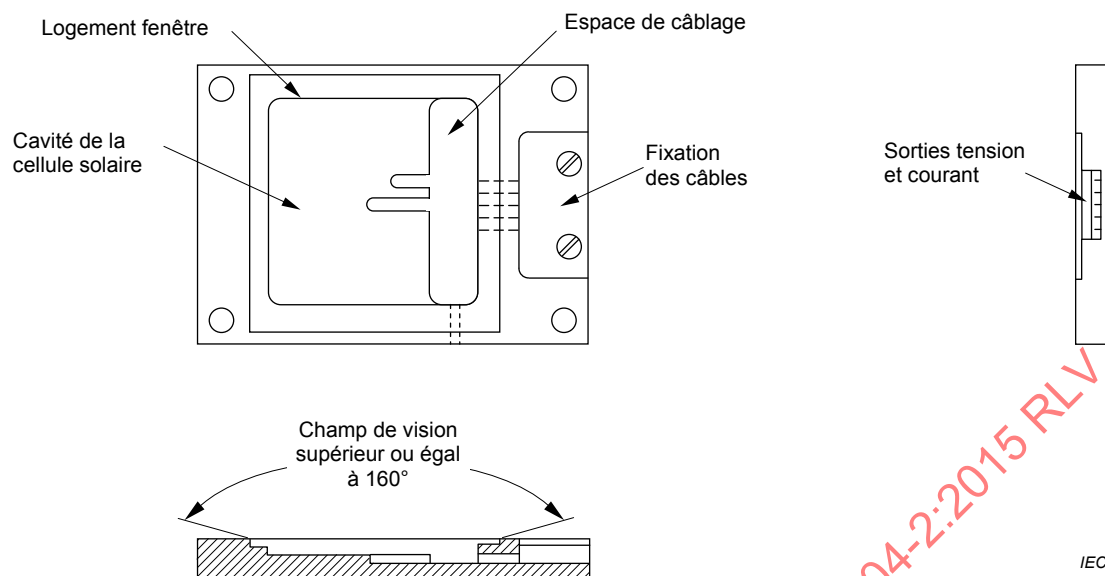


Figure 1 – Boîtier d'une cellule individuelle

3.6.1

cellule de référence avec couvercle de protection, mais sans encapsulant

cellule photovoltaïque de référence similaire à 3.6, mais équipée d'un couvercle de protection

Note 1 à l'article: Utilisation recommandée: comme référence de travail primaire et secondaire de laboratoire, en particulier lors des mesures des performances d'autres dispositifs photovoltaïques en utilisant des simulateurs solaires ou un rayonnement lumineux solaire naturel avec un rayonnement direct seulement.

3.6.2

cellule de référence encapsulée

cellule photovoltaïque de référence similaire à 3.6, mais encapsulée dans un assemblage de protection permettant de résister à une exposition extérieure de courte durée

Note 1 à l'article: Utilisation recommandée: comme référence de travail primaire et secondaire de laboratoire, en particulier lors des mesures des performances d'autres dispositifs photovoltaïques en rayonnement lumineux solaire naturel.

Note 2 à l'article: S'il a été démontré que le système d'encapsulation résiste à une exposition extérieure de longue durée, en appliquant les niveaux d'essai de l'IEC 61215, de telles cellules de référence peuvent aussi convenir pour être utilisées comme dispositifs de surveillance pour une évaluation à long terme du fonctionnement de panneaux photovoltaïques.

3.7

dispositifs multicellules de référence

dispositif photovoltaïque constitué de plusieurs cellules photovoltaïques

Note 1 à l'article: Utilisation recommandée: comme la composante diffuse du rayonnement lumineux solaire naturel et le rayon incident non perpendiculaire du rayonnement lumineux solaire simulé entrent en interaction avec les encapsulants et les plaques arrière d'un module et influencent la quantité d'éclairement que reçoit une cellule particulière, il est recommandé que les dispositifs de référence utilisés pour mesurer les sous-ensembles de modules et de panneaux soient encapsulés dans un boîtier multicellule, dont les caractéristiques optiques et mécaniques correspondent à celles du spécimen d'essai (modules, sous-ensembles de modules, panneaux) afin de répondre aux variations de la distribution géométrique du rayonnement incident de la même façon que le spécimen d'essai.

3.8

cellule de référence unique dans un boîtier multicellule

cellule photovoltaïque unique montée dans un boîtier tel que le châssis, le système d'encapsulation, la forme, les dimensions et l'espacement des cellules l'entourant soient les mêmes que dans le module à soumettre à essai

Note 1 à l'article: Les cellules environnantes peuvent être des cellules réelles ou factices ayant les mêmes propriétés optiques.

3.9

module de référence

module photovoltaïque constitué de l'encapsulation de cellules photovoltaïques connectées en parallèle et/ou en série

Note 1 à l'article: Utilisation recommandée: pour mesurer d'autres modules afin d'obtenir une correspondance des dimensions, de la construction mécanique, des propriétés optiques et des circuits électriques du module de référence et du module d'essai, de façon à minimiser les divergences dues à la non-uniformité du simulateur, les réflexions internes ou la distribution de la température.

3.10

résistances de shunt intégrées

résistance connectée aux bornes de sortie de dispositifs photovoltaïques

Note 1 à l'article: La résistance shunte la sortie du dispositif photovoltaïque pour délivrer une tension de sortie à mesurer et éviter que des moyens fournis par l'utilisateur établissent un état de court-circuit.

4 Sélection des dispositifs de référence

4.1 Exigences générales


Suivant leur utilisation prévue, les dispositifs de référence nécessitent de répondre à des exigences différentes en termes de réponse spectrale, de construction mécanique, de propriétés optiques, de dimensions et de circuit électrique. La réponse spectrale du dispositif de référence, par exemple, est déterminée par la transmission d'un couvercle de protection quelconque situé devant le dispositif et par la réponse spectrale du dispositif lui-même. La réponse spectrale globale peut donc être adaptée en utilisant des filtres appropriés en tant que couvercle de protection ou s'ajoutant à celui-ci.

Un dispositif de référence doit répondre aux exigences suivantes:

- a) ses caractéristiques photovoltaïques doivent être stables conformément aux exigences de l'Article 11;
- b) le signal de sortie du dispositif de référence doit varier linéairement avec l'éclairement sur la plage concernée, comme défini dans l'IEC 60904-10.

4.2 Exigences supplémentaires pour une cellule de référence unique dans un boîtier multicellule

La ligne en pointillés de la Figure 2 indique les dimensions minimales acceptables d'un boîtier multicellule.

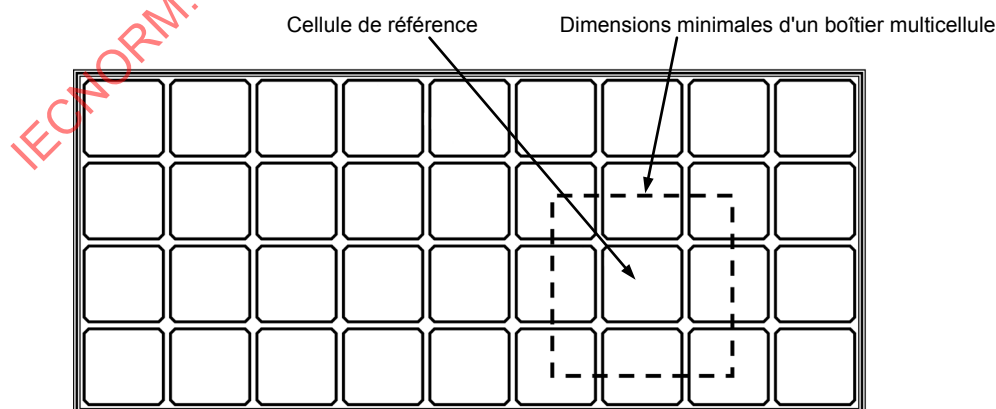

IEC

Figure 2 – Cellule de référence unique dans un boîtier multicellule