

INTERNATIONAL
STANDARD

ISO/
IEC/IEEE
8802-3

Third edition
2021-02

AMENDMENT 12
2022-10

**Telecommunications and exchange
between information technology
systems — Requirements for local and
metropolitan area networks —**

**Part 3:
Standard for Ethernet**

**AMENDMENT 12: Maintenance #15:
Power over Ethernet**

*Télécommunications et échange entre systèmes informatiques —
Exigences pour les réseaux locaux et métropolitains —*

Partie 3: Norme pour Ethernet

*AMENDEMENT 12: Maintenance #15: Alimentation électrique par
câble Ethernet*



Reference number
ISO/IEC/IEEE 8802-3:2021/Amd.12:2022(E)

© IEEE 2021



COPYRIGHT PROTECTED DOCUMENT

© IEEE 2021

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from IEEE at the address below.

Institute of Electrical and Electronics Engineers, Inc
3 Park Avenue, New York
NY 10016-5997, USA

Email: stds.ipr@ieee.org
Website: www.ieee.org

Published in Switzerland

Foreword

ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO/IEC documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives or www.iec.ch/members_experts/refdocs).

IEEE Standards documents are developed within the IEEE Societies and the Standards Coordinating Committees of the IEEE Standards Association (IEEE-SA) Standards Board. The IEEE develops its standards through a consensus development process, approved by the American National Standards Institute, which brings together volunteers representing varied viewpoints and interests to achieve the final product. Volunteers are not necessarily members of the Institute and serve without compensation. While the IEEE administers the process and establishes rules to promote fairness in the consensus development process, the IEEE does not independently evaluate, test, or verify the accuracy of any of the information contained in its standards.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO and IEC shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents) or the IEC list of patent declarations received (see <https://patents.iec.ch>).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see www.iso.org/iso/foreword.html. In the IEC, see www.iec.ch/understanding-standards.

ISO/IEC/IEEE 8802-3:2021/Amd.12 was prepared by the LAN/MAN of the IEEE Computer Society (as IEEE 802.3cv-2021) and drafted in accordance with its editorial rules. It was adopted, under the “fast-track procedure” defined in the Partner Standards Development Organization cooperation agreement between ISO and IEEE, by Joint Technical Committee ISO/IEC JTC 1, *Information technology*, Subcommittee SC 6, *Telecommunications and information exchange between systems*.

A list of all parts in the ISO/IEC/IEEE 8802-3 series can be found on the ISO and IEC websites.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html and www.iec.ch/national-committees.

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC/IEEE 8802-3:2021/AMD12:2022

IEEE Std 802.3cv™-2021

(Amendment to IEEE Std 802.3™-2018
as amended by IEEE Std 802.3cb™-2018,
IEEE Std 802.3bt™-2018,
IEEE Std 802.3cd™-2018,
IEEE Std 802.3cn™-2019,
IEEE Std 802.3cg™-2019,
IEEE Std 802.3cq™-2020,
IEEE Std 802.3cm™-2020,
IEEE Std 802.3ch™-2020,
IEEE Std 802.3ca™-2020,
IEEE Std 802.3cr™-2021,
and IEEE Std 802.3cu™-2021)

IEEE Standard for Ethernet

Amendment 12: Maintenance #15: Power over Ethernet

Developed by the

LAN/MAN Standards Committee
of the
IEEE Computer Society

Approved 9 May 2021

IEEE SA Standards Board

Abstract: This amendment implements editorial and technical corrections, refinements, and clarifications to Clause 145, Power over Ethernet, and related portions of the standard. No new features are added by this amendment.

Keywords: amendment, DTE power via MDI, Ethernet, IEEE 802.3™, IEEE 802.3bt™, PoE, Power over Ethernet

The Institute of Electrical and Electronics Engineers, Inc.
3 Park Avenue, New York, NY 10016-5997, USA

Copyright © 2021 by The Institute of Electrical and Electronics Engineers, Inc.
All rights reserved. Published 28 May 2021. Printed in the United States of America.

IEEE and 802 are registered trademarks in the U.S. Patent & Trademark Office, owned by The Institute of Electrical and Electronics Engineers, Incorporated.

PDF: ISBN 978-1-5044-7556-3 STD24692
Print: ISBN 978-1-5044-7557-0 STDPD24692

IEEE prohibits discrimination, harassment and bullying.

For more information, visit <http://www.ieee.org/web/aboutus/whatis/policies/p9-26.html>.

No part of this publication may be reproduced in any form, in an electronic retrieval system or otherwise, without the prior written permission of the publisher.

Important Notices and Disclaimers Concerning IEEE Standards Documents

IEEE Standards documents are made available for use subject to important notices and legal disclaimers. These notices and disclaimers, or a reference to this page (<https://standards.ieee.org/ipr/disclaimers.html>), appear in all standards and may be found under the heading “Important Notices and Disclaimers Concerning IEEE Standards Documents.”

Notice and Disclaimer of Liability Concerning the Use of IEEE Standards Documents

IEEE Standards documents are developed within the IEEE Societies and the Standards Coordinating Committees of the IEEE Standards Association (IEEE SA) Standards Board. IEEE develops its standards through an accredited consensus development process, which brings together volunteers representing varied viewpoints and interests to achieve the final product. IEEE Standards are documents developed by volunteers with scientific, academic, and industry-based expertise in technical working groups. Volunteers are not necessarily members of IEEE or IEEE SA, and participate without compensation from IEEE. While IEEE administers the process and establishes rules to promote fairness in the consensus development process, IEEE does not independently evaluate, test, or verify the accuracy of any of the information or the soundness of any judgments contained in its standards.

IEEE does not warrant or represent the accuracy or completeness of the material contained in its standards, and expressly disclaims all warranties (express, implied and statutory) not included in this or any other document relating to the standard, including, but not limited to, the warranties of: merchantability; fitness for a particular purpose; non-infringement; and quality, accuracy, effectiveness, currency, or completeness of material. In addition, IEEE disclaims any and all conditions relating to results and workmanlike effort. In addition, IEEE does not warrant or represent that the use of the material contained in its standards is free from patent infringement. IEEE Standards documents are supplied “AS IS” and “WITH ALL FAULTS.”

Use of an IEEE standard is wholly voluntary. The existence of an IEEE Standard does not imply that there are no other ways to produce, test, measure, purchase, market, or provide other goods and services related to the scope of the IEEE standard. Furthermore, the viewpoint expressed at the time a standard is approved and issued is subject to change brought about through developments in the state of the art and comments received from users of the standard.

In publishing and making its standards available, IEEE is not suggesting or rendering professional or other services for, or on behalf of, any person or entity, nor is IEEE undertaking to perform any duty owed by any other person or entity to another. Any person utilizing any IEEE Standards document, should rely upon his or her own independent judgment in the exercise of reasonable care in any given circumstances or, as appropriate, seek the advice of a competent professional in determining the appropriateness of a given IEEE standard.

IN NO EVENT SHALL IEEE BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO: THE NEED TO PROCURE SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE PUBLICATION, USE OF, OR RELIANCE UPON ANY STANDARD, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE AND REGARDLESS OF WHETHER SUCH DAMAGE WAS FORESEEABLE.

Translations

The IEEE consensus development process involves the review of documents in English only. In the event that an IEEE standard is translated, only the English version published by IEEE is the approved IEEE standard.

Official statements

A statement, written or oral, that is not processed in accordance with the IEEE SA Standards Board Operations Manual shall not be considered or inferred to be the official position of IEEE or any of its committees and shall not be considered to be, nor be relied upon as, a formal position of IEEE. At lectures, symposia, seminars, or educational courses, an individual presenting information on IEEE standards shall make it clear that the presenter's views should be considered the personal views of that individual rather than the formal position of IEEE, IEEE SA, the Standards Committee, or the Working Group.

Comments on standards

Comments for revision of IEEE Standards documents are welcome from any interested party, regardless of membership affiliation with IEEE or IEEE SA. However, **IEEE does not provide interpretations, consulting information, or advice pertaining to IEEE Standards documents.**

Suggestions for changes in documents should be in the form of a proposed change of text, together with appropriate supporting comments. Since IEEE standards represent a consensus of concerned interests, it is important that any responses to comments and questions also receive the concurrence of a balance of interests. For this reason, IEEE and the members of its Societies and Standards Coordinating Committees are not able to provide an instant response to comments, or questions except in those cases where the matter has previously been addressed. For the same reason, IEEE does not respond to interpretation requests. Any person who would like to participate in evaluating comments or in revisions to an IEEE standard is welcome to join the relevant IEEE working group. You can indicate interest in a working group using the Interests tab in the Manage Profile & Interests area of the [IEEE SA myProject system](#). An IEEE Account is needed to access the application.

Comments on standards should be submitted using the [Contact Us](#) form.

Laws and regulations

Users of IEEE Standards documents should consult all applicable laws and regulations. Compliance with the provisions of any IEEE Standards document does not constitute compliance to any applicable regulatory requirements. Implementers of the standard are responsible for observing or referring to the applicable regulatory requirements. IEEE does not, by the publication of its standards, intend to urge action that is not in compliance with applicable laws, and these documents may not be construed as doing so.

Data privacy

Users of IEEE Standards documents should evaluate the standards for considerations of data privacy and data ownership in the context of assessing and using the standards in compliance with applicable laws and regulations.

Copyrights

IEEE draft and approved standards are copyrighted by IEEE under US and international copyright laws. They are made available by IEEE and are adopted for a wide variety of both public and private uses. These

include both use, by reference, in laws and regulations, and use in private self-regulation, standardization, and the promotion of engineering practices and methods. By making these documents available for use and adoption by public authorities and private users, IEEE does not waive any rights in copyright to the documents.

Photocopies

Subject to payment of the appropriate licensing fees, IEEE will grant users a limited, non-exclusive license to photocopy portions of any individual standard for company or organizational internal use or individual, non-commercial use only. To arrange for payment of licensing fees, please contact Copyright Clearance Center, Customer Service, 222 Rosewood Drive, Danvers, MA 01923 USA; +1 978 750 8400; <https://www.copyright.com/>. Permission to photocopy portions of any individual standard for educational classroom use can also be obtained through the Copyright Clearance Center.

Updating of IEEE Standards documents

Users of IEEE Standards documents should be aware that these documents may be superseded at any time by the issuance of new editions or may be amended from time to time through the issuance of amendments, corrigenda, or errata. An official IEEE document at any point in time consists of the current edition of the document together with any amendments, corrigenda, or errata then in effect.

Every IEEE standard is subjected to review at least every 10 years. When a document is more than 10 years old and has not undergone a revision process, it is reasonable to conclude that its contents, although still of some value, do not wholly reflect the present state of the art. Users are cautioned to check to determine that they have the latest edition of any IEEE standard.

In order to determine whether a given document is the current edition and whether it has been amended through the issuance of amendments, corrigenda, or errata, visit [IEEE Xplore](#) or [contact IEEE](#). For more information about the IEEE SA or IEEE's standards development process, visit the IEEE SA Website.

Errata

Errata, if any, for all IEEE standards can be accessed on the [IEEE SA Website](#). Search for standard number and year of approval to access the web page of the published standard. Errata links are located under the Additional Resources Details section. Errata are also available in [IEEE Xplore](#). Users are encouraged to periodically check for errata.

Patents

IEEE Standards are developed in compliance with the [IEEE SA Patent Policy](#).

IMPORTANT NOTICE

IEEE Standards do not guarantee or ensure safety, security, health, or environmental protection, or ensure against interference with or from other devices or networks. IEEE Standards development activities consider research and information presented to the standards development group in developing any safety recommendations. Other information about safety practices, changes in technology or technology implementation, or impact by peripheral systems also may be pertinent to safety considerations during implementation of the standard. Implementers and users of IEEE Standards documents are responsible for determining and complying with all appropriate safety, security, environmental, health, and interference protection practices and all applicable laws and regulations.

Participants

The following individuals were officers and members of the IEEE 802.3 Working Group at the beginning of the IEEE P802.3cv Working Group ballot.

David J. Law, *IEEE 802.3 Working Group Chair*

Adam Healey, *IEEE 802.3 Working Group Vice-Chair*

Jon Lewis, *IEEE 802.3 Working Group Secretary*

Steven B. Carlson, *IEEE 802.3 Working Group Executive Secretary*

Valerie Maguire, *IEEE 802.3 Working Group Treasurer*

Chad Jones, *IEEE P802.3cv Maintenance #15: Power over Ethernet Task Force Chair*

Jon Lewis, *IEEE P802.3cv Maintenance #15: Power over Ethernet Task Force Editor-in-Chief*

David Abramson, *IEEE P802.3cv Maintenance #15: Power over Ethernet Task Force Comment Editor*

| | | |
|----------------------|-------------------------|------------------------------|
| Pete Anslow | Olaf Grau | Kent Lusted |
| Michikazu Aono | Robert Grow | Jeffery Maki |
| Nobuyasu Araki | Martin Gubow | David Malicoat |
| Tim Baggett | Mark Gustlin | Eric Maniloff |
| Thananya Baldwin | Marek Hajduczenia | Flavio Marques |
| Steven Baumgartner | Howard Heck | Arthur Marris |
| Denis Beaudoin | David Hess | Takeo Masuda |
| Gitesh Bhagwat | Brian Holden | Mick McCarthy |
| Rich Boyer | Yasuhiro Hyakutake | Brett McClellan |
| David Brandt | Jonathan Ingham | Larry McMillan |
| Ralf-Peter Braun | Kazuhiko Ishibe | Greg McSorley |
| Theodore Brillhart | Hideki Isono | Richard Mellitz |
| Paul Brooks | Tom Issenhuth | Shimon Muller |
| Matthew Brown | Hiroaki Ito | Sean Murphy |
| Leon Bruckman | Andrew Jimenez | James Nadolny |
| Jairo Bustos Heredia | John Johnson | Edward Nakamoto |
| Adrian Butter | Peter Jones | Raymond Nering |
| John Calvin | Lokesh Kabra | Paul Neveux |
| Clark Carty | Haysam Kadry | Gary Nicholl |
| David Chalupsky | Manabu Kagami | Shawn Nicholl |
| Jacky Chang | Upen Kareti | Paul Nikolich |
| Xin Chang | Athanasios Kasapi | Kevin Noll |
| Chan Chen | Yong Kim | Mark Nowell |
| Golam Choudhury | Mark Kimber | David Ofelt |
| Keng Hua Chuang | Michael Klempa | Ryo Okabe |
| John D'Ambrosia | Curtis Knittle | Tom Palkert |
| Piers Dawe | Elizabeth Kochuparambil | Carlos Pardo |
| Fred Dawson | Sam Kocsis | Earl Parsons |
| Gerrit den Besten | Wojciech Koczwar | Gerald Pepper |
| Claudio DeSanti | Paul Kolesar | Rubén Perez De Aranda Alonso |
| Curtis Donahue | Taiji Kondo | David Piehler |
| Kathryn Dube | Daniel Koppermueller | Fabio Pittala |
| Mike Dudek | Glen Kramer | Christopher Pohl |
| Frank Effenberger | Taketo Kumada | William Powell |
| David Estes | Hans Lackner | Rick Rabinovich |
| John Ewen | Frank Lambrecht | Parthasarathy Raju |
| Vincent Ferretti | Mark Laubach | Adee Ran |
| Brian Franchuk | Greg Le Cheminant | Alon Regev |
| Matthias Fritsche | David Lewis | Duane Remein |
| Takashi Fukuoka | Mike-Peng Li | Victor Renteria |
| Ali Ghiasi | Alex Lin | Thomas Rettig |
| Joel Goergen | Robert Lingle | Toshiaki Sakai |
| Steven Gorshe | Hai-Feng Liu | Sam Sambasivan |
| Hideki Goto | William Lo | Edward Sayre |
| Steffen Graber | Yuanqiu Luo | Matthew Schmitt |
| | | Hossein Sedarat |

| | | |
|-------------------|--------------------|---------------------|
| Masood Shariff | Michael Takefman | Dong Wei |
| Masato Shiino | Masaru Terada | Brian Welch |
| Ramin Shirani | Geoffrey Thompson | Matthias Wendt |
| Kapil Shrikhande | Pirooz Tooyserkani | Natalie Wienckowski |
| Jeff Slavick | Nathan Tracy | Dance Wu |
| Scott Sommers | Viet Tran | Peter Wu |
| Massimo Sorbara | David Tremblay | Dayin Xu |
| Edward Sprague | Stephen Trowbridge | Yu Xu |
| Peter Stassar | Mike Tu | James Young |
| Heath Stewart | Ed Ulrichs | Lennart Yseboodt |
| Junqing Sun | Alexander Umnov | Xingxin Zhang |
| Steve Swanson | Prasad Venugopal | Chunhui Zhu |
| Tomoo Takahara | Edward Walter | Yan Zhuang |
| Satoshi Takahashi | Roy Wang | Martin Zielinski |
| Tadashi Takahashi | Xuehuan Wang | George Zimmerman |
| Kazuya Takayama | James Weaver | Pavel Zivny |

The following members of the individual balloting committee voted on this standard. Balloters may have voted for approval, disapproval, or abstention.

| | | |
|----------------------|-------------------------------|---------------------|
| Robert Aiello | David J. Law | Bartien Sayogo |
| Thomas Alexander | Pi-Cheng Law | Heath Stewart |
| Curtis Ashton | Hyeong Ho Lee | Walter Struppler |
| Rich Boyer | Jon Lewis | Mitsutoshi Sugawara |
| Ralf-Peter Braun | Valerie Maguire | Michael Thompson |
| Jairo Bustos Heredia | Jeffery Maki | David Tremblay |
| William Byrd | Michael Maytum | Mark-Rene Uchida |
| John Calvin | Brett McClellan | Alexander Umnov |
| Steven B. Carlson | Richard Mellitz | Dmitri Varsanofiev |
| Juan Carreon | Rick Murphy | Prabodh Varshney |
| Clark Carty | Paul Nikolich | Ionel Marius Vladan |
| Charles Cook | Satoshi Obara | Ruoxu Wang |
| Avraham Freedman | Robert O'Hara | Lisa Ward |
| Matthias Fritsche | Carlos Pardo | Keith Waters |
| Marek Hajduczenia | Bansi Patel | James Weaver |
| Xiang He | Arumugam Paventhan | Stephen Webb |
| Adam Healey | David Piehler | Karl Weber |
| David Hess | Rick Pimpinella | Matthias Wendt |
| Werner Hoelzl | Fabio Pittala | Scott Willy |
| Gergely Huszak | Patty Polpattana | Andreas Wolf |
| Yasuhiro Hyakutake | Adee Ran | Peter Wu |
| Tom Issenhuth | R. K. Rannow | James Young |
| Chad Jones | Lakshman Raut | Lennart Yseboodt |
| Peter Jones | Maximilian Riegel | Yu Yuan |
| Lokesh Kabra | Benjamin Rolfe | Oren Yuen |
| Piotr Karocki | Toshiaki Sakai | Janusz Zalewski |
| Stuart Kerry | Hugo Ricardo Sanchez Reategui | George Zimmerman |
| Yong Kim | Olindo Savi | |
| Mark Laubach | Hiroshi Sawano | |

When the IEEE SA Standards Board approved this standard on 9 May 2021, it had the following membership:

Gary Hoffman, *Chair*
Jon Walter Rosdahl, *Vice Chair*
John D. Kulick, *Past Chair*
Konstantinos Karachalios, *Secretary*

Edward A. Addy
Doug Edwards
Ramy Ahmed Fathy
J. Travis Griffith
Thomas Koshy
Joseph L. Koepfinger*
David J. Law

Howard Li
Daozhuang Lin
Kevin Lu
Daleep C. Mohla
Chenhui Niu
Damir Novosel
Annette Reilly
Dorothy Stanley

Mehmet Ulema
Lei Wang
F. Keith Waters
Karl Weber
Sha Wei
Howard Wolfman
Daidi Zhong

*Member Emeritus

Introduction

This introduction is not part of IEEE Std 802.3cv-2021, IEEE Standard for Ethernet—Amendment 12: Maintenance #15: Power over Ethernet.

IEEE Std 802.3™ was first published in 1985. Since the initial publication, many projects have added functionality or provided maintenance updates to the specifications and text included in the standard. Each IEEE 802.3 project/amendment is identified with a suffix (e.g., IEEE Std 802.3ba™-2010).

The half duplex Media Access Control (MAC) protocol specified in IEEE Std 802.3-1985 is Carrier Sense Multiple Access with Collision Detection (CSMA/CD). This MAC protocol was key to the experimental Ethernet developed at Xerox Palo Alto Research Center, which had a 2.94 Mb/s data rate. Ethernet at 10 Mb/s was jointly released as a public specification by Digital Equipment Corporation (DEC), Intel and Xerox in 1980. Ethernet at 10 Mb/s was approved as an IEEE standard by the IEEE Standards Board in 1983 and subsequently published in 1985 as IEEE Std 802.3-1985. Since 1985, new media options, new speeds of operation, and new capabilities have been added to IEEE Std 802.3. A full duplex MAC protocol was added in 1997.

Some of the major additions to IEEE Std 802.3 are identified in the marketplace with their project number. This is most common for projects adding higher speeds of operation or new protocols. For example, IEEE Std 802.3u™ added 100 Mb/s operation (also called Fast Ethernet), IEEE Std 802.3z added 1000 Mb/s operation (also called Gigabit Ethernet), IEEE Std 802.3ae added 10 Gb/s operation (also called 10 Gigabit Ethernet), IEEE Std 802.3ah™ specified access network Ethernet (also called Ethernet in the First Mile) and IEEE Std 802.3ba added 40 Gb/s operation (also called 40 Gigabit Ethernet) and 100 Gb/s operation (also called 100 Gigabit Ethernet). These major additions are all now included in and are superseded by IEEE Std 802.3-2018 and are not maintained as separate documents.

At the date of IEEE Std 802.3cv-2021 publication, IEEE Std 802.3 was composed of the following documents:

IEEE Std 802.3-2018

Section One—Includes Clause 1 through Clause 20 and Annex A through Annex H and Annex 4A. Section One includes the specifications for 10 Mb/s operation and the MAC, frame formats and service interfaces used for all speeds of operation.

Section Two—Includes Clause 21 through Clause 33 and Annex 22A through Annex 33E. Section Two includes management attributes for multiple protocols and speed of operation as well as specifications for providing power over twisted pair cabling for multiple operational speeds. It also includes general information on 100 Mb/s operation as well as most of the 100 Mb/s Physical Layer specifications.

Section Three—Includes Clause 34 through Clause 43 and Annex 36A through Annex 43C. Section Three includes general information on 1000 Mb/s operation as well as most of the 1000 Mb/s Physical Layer specifications.

Section Four—Includes Clause 44 through Clause 55 and Annex 44A through Annex 55B. Section Four includes general information on 10 Gb/s operation as well as most of the 10 Gb/s Physical Layer specifications.

Section Five—Includes Clause 56 through Clause 77 and Annex 57A through Annex 76A. Clause 56 through Clause 67 and Clause 75 through Clause 77, as well as associated annexes, specify subscriber access and other Physical Layers and sublayers for operation from 512 kb/s to 10 Gb/s, and defines

services and protocol elements that enable the exchange of IEEE Std 802.3 format frames between stations in a subscriber access network. Clause 68 specifies a 10 Gb/s Physical Layer specification. Clause 69 through Clause 74 and associated annexes specify Ethernet operation over electrical backplanes at speeds of 1000 Mb/s and 10 Gb/s.

Section Six—Includes Clause 78 through Clause 95 and Annex 83A through Annex 93C. Clause 78 specifies Energy-Efficient Ethernet. Clause 79 specifies IEEE 802.3 Organizationally Specific Link Layer Discovery Protocol (LLDP) type, length, and value (TLV) information elements. Clause 80 through Clause 95 and associated annexes include general information on 40 Gb/s and 100 Gb/s operation as well the 40 Gb/s and 100 Gb/s Physical Layer specifications. Clause 90 specifies Ethernet support for time synchronization protocols.

Section Seven—Includes Clause 96 through Clause 115 and Annex 97A through Annex 115A. Clause 96 through Clause 98, Clause 104, and associated annexes, specify Physical Layers and optional features for 100 Mb/s and 1000 Mb/s operation over a single twisted pair. Clause 100 through Clause 103, as well as associated annexes, specify Physical Layers for the operation of the EPON protocol over coaxial distribution networks. Clause 105 through Clause 114 and associated annexes include general information on 25 Gb/s operation as well as 25 Gb/s Physical Layer specifications. Clause 99 specifies a MAC merge sublayer for the interspersing of express traffic. Clause 115 and its associated annex specify a Physical Layer for 1000 Mb/s operation over plastic optical fiber.

Section Eight—Includes Clause 116 through Clause 126 and Annex 119A through Annex 120E. Clause 116 through Clause 124 and associated annexes include general information on 200 Gb/s and 400 Gb/s operation as well the 200 Gb/s and 400 Gb/s Physical Layer specifications. Clause 125 and Clause 126 include general information on 2.5 Gb/s and 5 Gb/s operation as well as 2.5 Gb/s and 5 Gb/s Physical Layer specifications.

IEEE Std 802.3cb™-2018

Amendment 1—This amendment includes changes to IEEE Std 802.3-2018 and its amendments, and adds Clause 127 through Clause 130, Annex 127A, Annex 128A, Annex 128B, and Annex 130A. This amendment adds new Physical Layers for operation at 2.5 Gb/s and 5 Gb/s over electrical backplanes.

IEEE Std 802.3bt™-2018

Amendment 2—This amendment includes changes to IEEE Std 802.3-2018 and adds Clause 145, Annex 145A, Annex 145B, and Annex 145C. This amendment adds power delivery using all four pairs in the structured wiring plant, resulting in greater power being available to end devices. This amendment also allows for lower standby power consumption in end devices and adds a mechanism to better manage the available power budget.

IEEE Std 802.3cd™-2018

Amendment 3—This amendment includes changes to IEEE Std 802.3-2018 and adds Clause 131 through Clause 140 and Annex 135A through Annex 136D. This amendment adds MAC parameters, Physical Layers, and management parameters for the transfer of IEEE 802.3 format frames at 50 Gb/s, 100 Gb/s, and 200 Gb/s.

IEEE Std 802.3cn™-2019

Amendment 4—This amendment includes changes to IEEE Std 802.3-2018 and adds 50 Gb/s, 200 Gb/s, and 400 Gb/s Physical Layer specifications and management parameters for operation over single-mode fiber with reaches of at least 40 km.

IEEE Std 802.3cg™-2019

Amendment 5—This amendment includes changes to IEEE Std 802.3-2018 and its amendments and adds Clause 146 through Clause 148 and Annex 146A and Annex 146B. This amendment adds 10 Mb/s Physical Layer specifications and management parameters for operation on a single balanced pair of conductors.

IEEE Std 802.3cq™-2020

Amendment 6—This amendment includes editorial and technical corrections, refinements, and clarifications to Clause 33 and related portions of the standard.

IEEE Std 802.3cm™-2020

Amendment 7—This amendment includes changes to IEEE Std 802.3-2018 and adds Clause 150. This amendment adds Physical Layer (PHY) specifications and management parameters for 400 Gb/s operation on four pairs (400GBASE-SR4.2) and eight pairs (400GBASE-SR8) of multimode fiber, over reaches of at least 100 m.

IEEE Std 802.3ch™-2020

Amendment 8—This amendment includes changes to IEEE Std 802.3-2018 and adds Clause 149, Annex 149A, Annex 149B, and Annex 149C. This amendment adds physical layer specifications and management parameters for operation at 2.5 Gb/s, 5 Gb/s, and 10 Gb/s over a single balanced pair of conductors.

IEEE Std 802.3ca™-2020

Amendment 9—This amendment to IEEE Std 802.3-2018 extends the operation of Ethernet passive optical networks (EPONs) to multiple channels of 25 Gb/s providing both symmetric and asymmetric operation for the following data rates (downstream/upstream): 25/10 Gb/s, 25/25 Gb/s, 50/10 Gb/s, 50/25 Gb/s, and 50/50 Gb/s. This amendment specifies the 25 Gb/s EPON Multi-Channel Reconciliation Sublayer (MCRS), Nx25G-EPON Physical Coding Sublayers (PCSs), Physical Media Attachment (PMA) sublayers, and Physical Medium Dependent (PMD) sublayers that support both symmetric and asymmetric data rates while maintaining backward compatibility with already deployed 10 Gb/s EPON equipment. The EPON operation is defined for distances of at least 20 km, and for a split ratio of at least 1:32.

IEEE Std 802.3cr™-2021

Amendment 10—This amendment includes changes to IEEE Std 802.3-2018 and adds Annex J. This amendment replaces references to the IEC 60950 series of standards (including IEC 60950-1 “Information technology equipment—Safety—Part 1: General requirements”) with appropriate references to the IEC 62368 “Audio/video, information and communication technology equipment” series and makes appropriate changes to the standard corresponding to the new references.

IEEE Std 802.3cu™-2021

Amendment 11—This amendment includes changes to IEEE Std 802.3-2018 and adds Clause 151. This amendment adds Physical Layer (PHY) specifications and management parameters for 100 Gb/s and 400 Gb/s operation over single-mode fiber, based on 100 Gb/s per wavelength optical signaling.

IEEE Std 802.3cy™-2021

Amendment 12—This amendment includes editorial and technical corrections, refinements, and clarifications to Clause 145, Power over Ethernet, and related portions of the standard.

Two companion documents exist, IEEE Std 802.3.1 and IEEE Std 802.3.2. IEEE Std 802.3.1 describes Ethernet management information base (MIB) modules for use with the Simple Network Management Protocol (SNMP). IEEE Std 802.3.2 describes YANG data models for Ethernet. IEEE Std 802.3.1 and IEEE Std 802.3.2 are updated to add management capability for enhancements to IEEE Std 802.3 after approval of those enhancements.

IEEE Std 802.3 will continue to evolve. New Ethernet capabilities are anticipated to be added within the next few years as amendments to this standard.

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC/IEEE 8802-3:2021/Amd.12:2022

Contents

| | |
|--|----|
| 30. Management..... | 16 |
| 30.2 Managed objects | 16 |
| 30.2.3 Containment..... | 16 |
| 30.12 Layer Management for Link Layer Discovery Protocol (LLDP)..... | 18 |
| 30.12.3 LLDP Remote System Group managed object class | 18 |
| 30.12.3.1 LLDP Remote System Group attributes | 18 |
| 30.12.3.1.18f aLldpXdot3RemPowerClassExtA | 18 |
| 30.12.3.1.18g aLldpXdot3RemPowerClassExtB | 18 |
| 33. Power over Ethernet over 2 Pairs | 19 |
| 33.6 Data Link Layer classification | 19 |
| 33.6.3 Power control state diagrams | 19 |
| 33.6.3.3 Variables | 19 |
| 33.6.3.4 Functions..... | 20 |
| 79. IEEE 802.3 Organizationally Specific Link Layer Discovery Protocol (LLDP) type, length, and value (TLV) information elements | 21 |
| 79.3.2 Power Via MDI TLV | 21 |
| 79.3.8 Power via MDI Measurements TLV | 21 |
| 79.3.8.1 Measurements | 21 |
| 145. Power over Ethernet..... | 22 |
| 145.2 Power sourcing equipment (PSE)..... | 22 |
| 145.2.5 PSE state diagrams..... | 22 |
| 145.2.5.1 State diagram overview and timing | 22 |
| 145.2.5.2 Conventions | 22 |
| 145.2.5.2.1 Alternative designation | 22 |
| 145.2.5.3 Constants..... | 22 |
| 145.2.5.4 Variables..... | 23 |
| 145.2.5.6 Functions..... | 24 |
| 145.2.5.7 State diagrams | 25 |
| 145.2.8 PSE classification of PDs and mutual identification | 33 |
| 145.2.8.1 PSE Multiple-Event Physical Layer classification | 33 |
| 145.3 Powered devices (PDs) | 33 |
| 145.3.3 PD state diagrams | 33 |
| 145.3.3.3 Single-signature PD state diagrams | 33 |
| 145.3.3.3.2 Variables | 33 |
| 145.3.3.3.5 State diagrams | 34 |
| 145.3.3.4 Dual-signature PD state diagram | 36 |
| 145.3.3.4.5 State diagram | 36 |
| 145.3.6 PD classification | 36 |
| 145.3.6.2 Autoclass (optional)..... | 36 |
| 145.3.8 PD power | 37 |
| 145.3.8.1 Input voltage | 37 |
| 145.3.8.2 Input average power..... | 37 |
| 145.3.8.4 Peak operating power..... | 37 |
| 145.3.8.4.1 Peak operating power exceptions | 37 |

| | | |
|-------------|---|----|
| 145.5 | Data Link Layer classification | 37 |
| 145.5.3 | Power control state diagrams | 37 |
| 145.5.3.2 | PSE power control state diagrams | 37 |
| 145.5.3.2.2 | Variables | 37 |
| 145.5.3.2.5 | State diagrams | 39 |
| 145.5.3.3 | Single-signature PD power control state diagrams | 41 |
| 145.5.3.3.1 | Variables | 41 |
| 145.5.3.3.3 | Functions | 41 |
| 145.5.3.4 | Dual-signature PD power control state diagrams | 42 |
| 145.5.3.4.3 | Functions | 42 |
| 145.5.7 | Autoclass | 42 |
| 145.7 | Protocol implementation conformance statement (PICS) proforma for Clause 145, Power over Ethernet | 43 |
| 145.7.3 | PICS proforma tables for Power over Ethernet | 43 |
| 145.7.3.1 | Power sourcing equipment | 43 |
| 145.7.3.2 | Powered devices | 44 |

IEEE Standard for Ethernet

Amendment 12: Maintenance #15: Power over Ethernet

(This amendment is based on IEEE Std 802.3™-2018 as amended by IEEE Std 802.3cb™-2018, IEEE Std 802.3bt™-2018, IEEE Std 802.3cd™-2018, IEEE Std 802.3cn™-2019, IEEE Std 802.3cg™-2019, IEEE Std 802.3cq™-2020, IEEE Std 802.3cm™-2020, IEEE Std 802.3ch™-2020, IEEE Std 802.3ca™-2020, IEEE Std 802.3cr™-2021, and IEEE Std 802.3cu™-2021.)

NOTE—The editing instructions contained in this amendment define how to merge the material contained therein into the existing base standard and its amendments to form the comprehensive standard.

The editing instructions are shown in ***bold italic***. Four editing instructions are used: change, delete, insert, and replace. ***Change*** is used to make corrections in existing text or tables. The editing instruction specifies the location of the change and describes what is being changed by using ~~strike through~~ (to remove old material) and underscore (to add new material). ***Delete*** removes existing material. ***Insert*** adds new material without disturbing the existing material. Deletions and insertions may require renumbering. If so, renumbering instructions are given in the editing instruction. ***Replace*** is used to make changes in figures or equations by removing the existing figure or equation and replacing it with a new one. Editing instructions, change markings, and this NOTE will not be carried over into future editions because the changes will be incorporated into the base standard.

Cross references that refer to clauses, tables, equations, or figures not covered by this amendment are highlighted in green.¹

¹ Notes in text, tables, and figures are given for information only and do not contain requirements needed to implement the standard.


30. Management

30.2 Managed objects

30.2.3 Containment

Replace Figure 30–3 as modified by IEEE Std 802.3cg-2019 to remove oPD as shown on the following page.

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC/IEEE 8802-3:2021/AMD12:2022

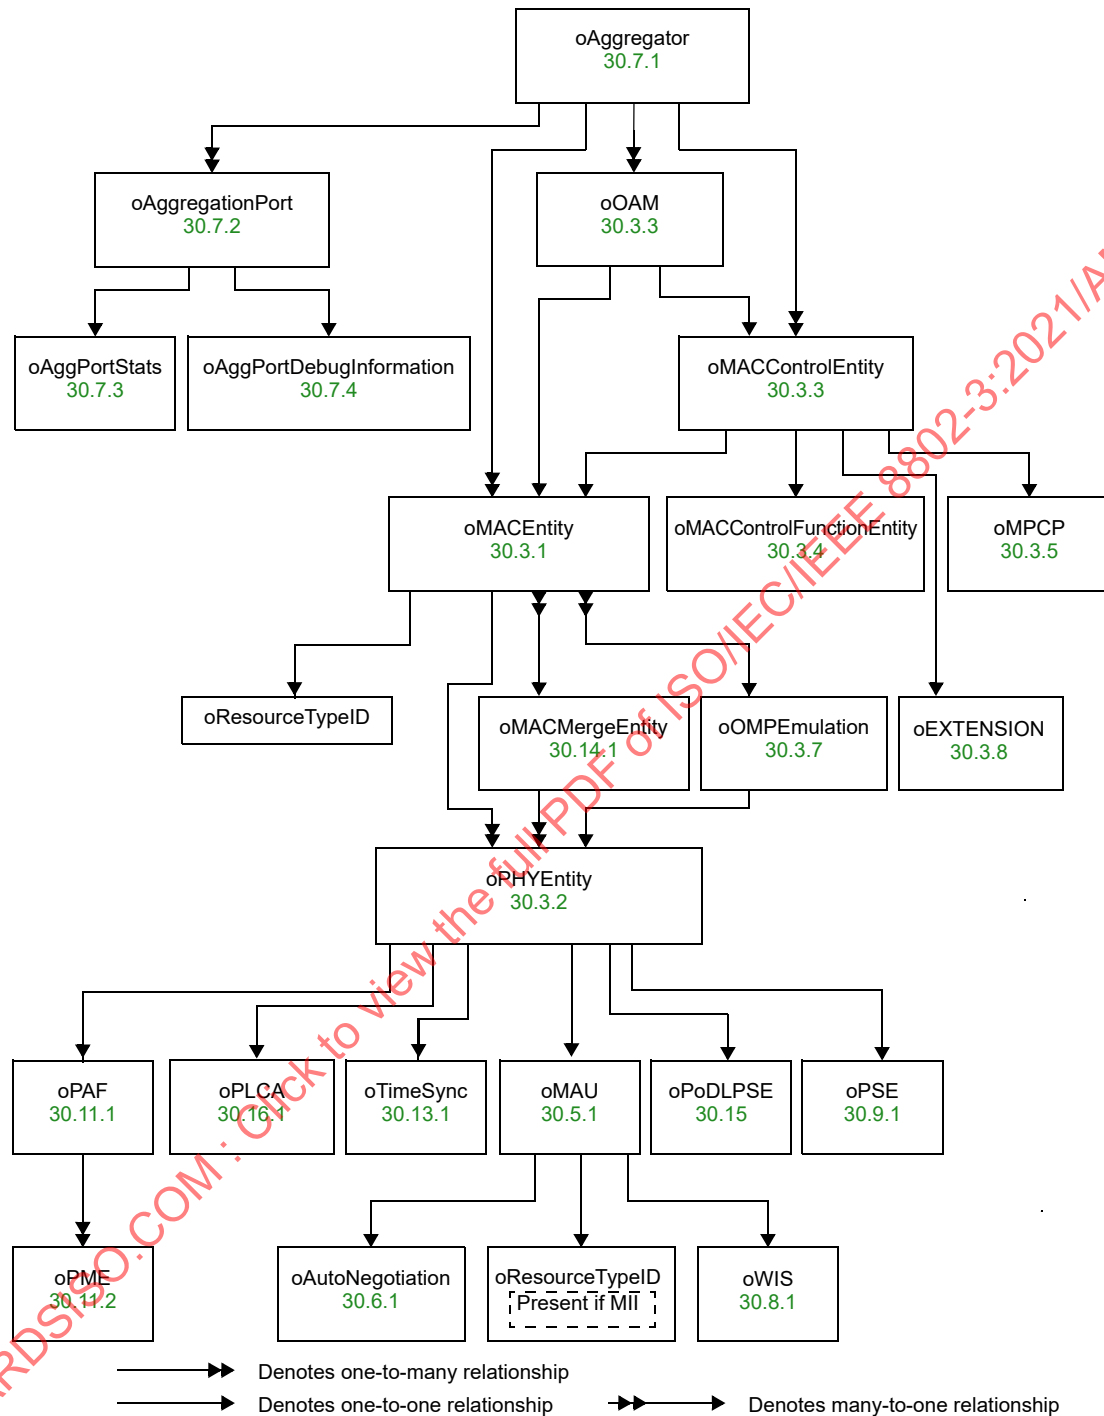

NOTE—The objects oAggregator, oAggregationPort, oAggPortStats, and oAggPortDebugInformation are deprecated by IEEE Std 802.1AX™-2008.

Figure 30-3—DTE System entity relationship diagram

30.12 Layer Management for Link Layer Discovery Protocol (LLDP)**30.12.3 LLDP Remote System Group managed object class****30.12.3.1 LLDP Remote System Group attributes***Change 30.12.3.1.18f and 30.12.3.1.18g (as inserted by IEEE Std 802.3bt-2018) as follows:***30.12.3.1.18f aLldpXdot3RemPowerClassExtA**

ATTRIBUTE

APPROPRIATE SYNTAX:

An ENUMERATED VALUE that has one of the following entries:

| | |
|-----------|--|
| singlesig | Single-signature PD or 2-pair only PSE |
| class1 | Class 1 |
| class2 | Class 2 |
| class3 | Class 3 |
| class4 | Class 4 |
| class5 | Class 5 |

BEHAVIOUR DEFINED AS:

For a dual-signature PD, a read-only value that indicates the currently assigned Class for Mode A by the remote 4-pair PSE. For a single-signature PD or a dual-signature PD connected to a 2-pair only PSE, a read-only value set to 'singlesig' by the remote PSE. For a PSE connected to a dual-signature PD, a read-only value that indicates the requested Class for Mode A during Physical Layer classification (see 145.2.8) by the remote PD. For a PSE connected to a single-signature PD, a read-only value set to 'singlesig' by the remote PD.;

30.12.3.1.18g aLldpXdot3RemPowerClassExtB

ATTRIBUTE

APPROPRIATE SYNTAX:

An ENUMERATED VALUE that has one of the following entries:

| | |
|-----------|--|
| singlesig | Single-signature PD or 2-pair only PSE |
| class1 | Class 1 |
| class2 | Class 2 |
| class3 | Class 3 |
| class4 | Class 4 |
| class5 | Class 5 |

BEHAVIOUR DEFINED AS:

For a dual-signature PD, a read-only value that indicates the currently assigned Class for Mode B by the remote 4-pair PSE. For a single-signature PD or a dual-signature PD connected to a 2-pair only PSE, a read-only value set to 'singlesig' by the remote PSE. For a PSE connected to a dual-signature PD, a read-only value that indicates the requested Class for Mode B during Physical Layer classification (see 145.2.8) by the remote PD. For a PSE connected to a single-signature PD, a read-only value set to 'singlesig' by the remote PD.;

33. Power over Ethernet over 2 Pairs

33.6 Data Link Layer classification

33.6.3 Power control state diagrams

33.6.3.3 Variables

Change the following definitions in 33.6.3.3, some of which were changed by IEEE Std 802.3bt-2018 (unchanged definitions not shown):

...

MirroredPDRequestedPowerValue

The copy of PDRequestedPowerValue that the PSE receives from the remote system. This variable is mapped from the `aLldpXdot3RemPDRequestedPowerValue` attribute (30.12.3.1.17). Actual power numbers are represented using an integer value that is encoded according to Equation (79-1), where X is the decimal value of MirroredPDRequestedPowerValue. Power numbers are represented using an integer value in units of 0.1 W.
Values: 1 through 255

...

MirroredPSEAllocatedPowerValue

The copy of PSEAllocatedPowerValue that the PD receives from the remote system. This variable is mapped from the `aLldpXdot3RemPSEAllocatedPowerValue` attribute (30.12.3.1.18). Actual power numbers are represented using an integer value that is encoded according to Equation (79-2), where X is the decimal value of MirroredPSEAllocatedPowerValue. Power numbers are represented using an integer value in units of 0.1 W.
Values: 1 through 255

...

PDMaxPowerValue

Integer that indicates the actual PD power value of the local system. The actual PD power value for a PD is the maximum input average power (see 33.3.7.2) the PD ever draws under the current power allocation. Actual power numbers are represented using an integer value that is encoded according to Equation (79-1), where X is the decimal value of PDMaxPowerValue. Power numbers are represented using an integer value in units of 0.1 W.

PDRequestedPowerValue

Integer that indicates the PD requested power value in the PD. The value is the maximum input average power (see 33.3.7.2) the PD requests. This power value is encoded according to Equation (79-1), where X is the decimal value of PDRequestedPowerValue. Power numbers are represented using an integer value in units of 0.1 W. This variable is mapped from the `aLldpXdot3LocPDRequestedPowerValue` attribute (30.12.2.1.17).

Values: 1 through PD_DLLMAX_VALUE

PSEAllocatedPowerValue

Integer that indicates the PSE allocated power value in the PSE. The value is the maximum input average power (see 33.3.7.2) the PD ever draws. The power value for a PSE is the maximum input average power the PD may ever draw. This power value is encoded according to Equation (79-2), where X is the decimal value of PSEAllocatedPowerValue. Power numbers are represented using an integer value in units of 0.1 W. This variable is mapped from the `aLldpXdot3LocPSEAllocatedPowerValue` attribute (30.12.2.1.18).

Values: 1 through 255

...

TempVar

A temporary variable used to store Power Value. Actual power numbers are represented using an integer value that is encoded according to Equation (79-1) or Equation (79-2), where X is the

~~decimal value of TempVar.~~ A temporary variable used to store Power Value, represented by an integer value in units of 0.1 W.

33.6.3.4 Functions

Change 33.6.3.4 as follows:

pse_power_review

This function evaluates the power allocation or budget of the PSE based on local system changes. The function returns the following variables:

PSE_NEW_VALUE:

~~The new maximum power value that the PSE expects the PD to draw. Actual power numbers are represented using an integer value that is encoded according to Equation (79-2), where X is the decimal value of PSE_NEW_VALUE.~~

Power numbers are represented using an integer value in units of 0.1 W.

pd_power_review

This function evaluates the power requirements of the PD based on local system changes and/or changes in the PSE allocated power value. The function returns the following variables:

PD_NEW_VALUE:

~~The new maximum power value that the PD wants to draw. Actual power numbers are represented using an integer value that is encoded according to Equation (79-1), where X is the decimal value of PD_NEW_VALUE.~~

Power numbers are represented using an integer value in units of 0.1 W.

79. IEEE 802.3 Organizationally Specific Link Layer Discovery Protocol (LLDP) type, length, and value (TLV) information elements**79.3.2 Power Via MDI TLV**

Delete the last paragraph of 79.3.2 beginning “If a Type 1 or Type 2 power entity ...”, as inserted by IEEE Std 802.3bt-2018.

Insert the following text and Table 79–2a at the end of 79.3.2 as follows:

Power entities that implement Data Link Layer classification shall support the Power via MDI TLV DLL classification extension fields shown in Figure 79–3 after the PI has been powered. Type 3 or Type 4 power entities that implement Data Link Layer classification and are connected to another Type 3 or Type 4 power entity shall support the Type 3 and Type 4 extension fields shown in Figure 79–3 after the PI has been powered. Such entities, when connected to a Type 1 or Type 2 power entity, may support the Type 3 and Type 4 extension fields shown in Figure 79–3 after the PI has been powered. Type 1 and Type 2 devices shall not include the Type 3 and Type 4 extension fields in the transmitted Power via MDI TLV.

NOTE—Some implementations of the Power via MDI TLV in Type 1 and Type 2 power entities ignore TLVs that are longer than 12 octets. In order to be interoperable with these implementations, Type 3 and Type 4 power entities are permitted to transmit 12-octet TLVs (without the Type 3 and Type 4 extension) after first transmitting at least one valid 29-octet TLV (including the Type 3 and Type 4 extension). Table 79–2a lists the recommended Power via MDI TLV formats for each combination of power entity Types.

Table 79–2a—Recommended TLV format

| Power entity A | Power entity B | Power entity A sends | Power entity B sends | Recommended TLV format |
|----------------|----------------|----------------------|----------------------|------------------------|
| Type 1, Type 2 | Type 1, Type 2 | 12-octet TLV | 12-octet TLV | 12-octet TLV |
| Type 3, Type 4 | Type 1, Type 2 | 29-octet TLV | 12-octet TLV | 12-octet TLV |
| Type 1, Type 2 | Type 3, Type 4 | 12-octet TLV | 29-octet TLV | 12-octet TLV |
| Type 3, Type 4 | Type 3, Type 4 | 29-octet TLV | 29-octet TLV | 29-octet TLV |

Type 3 and Type 4 PD power entities can determine the PSE Type based on the duration of the first classification event (see 145.3.7) or based on the length of a received Power via MDI TLV (see Figure 79–3). Type 3 and Type 4 PSEs can determine the PD Type based on the PDs Physical Layer requested Class (see 145.2.8 and 145.3.6.1) or based on the length of a received Power via MDI TLV (see Figure 79–3).

79.3.8 Power via MDI Measurements TLV**79.3.8.1 Measurements**

Change footnote a to Table 79–8a (as inserted by IEEE Std 802.3bt-2018) as follows:

^a The valid range of this field extends beyond the allowed operating range of $V_{\text{Port_PD_or}} V_{\text{Port_PD-2P}}$; see 33.3.8.1 and 145.3.8.1.

Clause 145 was added by IEEE Std 802.3bt-2018

145. Power over Ethernet

145.2 Power sourcing equipment (PSE)

145.2.5 PSE state diagrams

145.2.5.1 State diagram overview and timing

Change the third paragraph of 145.2.5.1 as follows:

A PSE performing detection using only Alternative B may fail to detect a valid PD detection signature. ~~When this occurs, the PSE shall back off for at least T_{dbo} as defined in Table 145–16 before attempting another detection, except in the case of an open circuit as defined in 145.2.6.5. During this backoff, the PSE shall not apply a voltage greater than V_{Off} to the PI. When this occurs, the PSE shall not apply a voltage greater than V_{Off} to the PI until after at least T_{dbo} , as defined in Table 145–16, has passed before attempting another detection, except in the case of an open circuit as defined in 145.2.6.5. See 145.2.6.5 for more information on Alternative B detection backoff requirements.~~

Change the fifth paragraph of 145.2.5.1 as follows:

Connection ϵ check timing requirements are specified in Table 145–10. Detection and power turn-on timing requirements are specified in Table 145–16. Classification timing requirements are specified in Table 145–14. Autoclass timing requirements are specified in Table 145–15.

145.2.5.2 Conventions

Insert new subclause 145.2.5.2.1 at the end of 145.2.5.2 as follows:

145.2.5.2.1 Alternative designation

Alternative information is obtained by replacing the X in the desired variable or function with the letter of the Alternative of interest. The Alternative is referred to in general as follows:

X

Generic Alternative designator. When X is used in a state diagram, its value is local to that state diagram and not global to the set of state diagrams.

Values:

A: Alternative A
B: Alternative B

NOTE—The variables alt_pri and alt_sec map Alternatives to Primary and Secondary.

145.2.5.3 Constants

Change the definition for value 0 of CC_DET_SEQ as follows:

0: Connection ϵ check is followed by staggered detection for a single-signature PD and parallel or staggered detection for a dual-signature PD.

145.2.5.4 Variables

Insert new variable `ac_measurement_completed` at the beginning of 145.2.5.4:

`ac_measurement_completed`

A variable that indicates that an Autoclass measurement has been completed. This variable is set by the state diagram.

Values:

- FALSE: The Autoclass measurement has not completed.
- TRUE: An Autoclass measurement has been completed.

Change the variable definition for `MirroredPDAutoclassRequest` in 145.2.5.4 as follows:

`MirroredPDAutoclassRequest`

~~A variable output by the PSE power control state diagram that indicates whether the PSE has received an Autoclass measurement request from the PD via the Data Link Layer. See 145.5. This variable is assigned through Table 145–38.~~

The copy of the 'PD Autoclass request' field in the Power via MDI TLV that the PSE receives from the remote system. This variable is mapped from `aLldpXdot3RemAutoclassRequest` (30.12.3.1.18o) and assigned through Table 145–38.

Insert new variable `option_MEC_after_probe` after variable `option_detect_ted_sec` in 145.2.5.4:

`option_MEC_after_probe`

This variable indicates if Multiple-Event classification is allowed after a class probe in the dual-signature state diagrams.

Values:

- FALSE: Only allow Single-Event classification after class probe.
- TRUE: Allow Multiple-Event classification after class probe.

Insert new variable `pd_autoclass_cancelled` after variable `pd_4pair_cand` in 145.2.5.4:

`pd_autoclass_cancelled`

A variable that indicates whether the PD cancelled Autoclass by drawing less than Class 1 power during the Autoclass measurement period.

Values:

- FALSE: The PD did not cancel Autoclass or did not request Autoclass.
- TRUE: The PD requested Physical Layer Autoclass and cancelled.

Insert two new variables `pse_ready_pri` and `pse_ready_sec` after variable `pse_ready` in 145.2.5.4:

`pse_ready_pri`

Variable that is asserted in an implementation-dependent manner to probe the Primary Alternative. This variable may be set by the PSE at any time.

Values:

- FALSE: PSE is not ready to probe the primary link segment.
- TRUE: PSE is ready to probe the primary link segment.

`pse_ready_sec`

Variable that is asserted in an implementation-dependent manner to probe the Secondary Alternative. This variable may be set by the PSE at any time.

Values:

- FALSE: PSE is not ready to probe the secondary link segment.
- TRUE: PSE is ready to probe the secondary link segment.

145.2.5.6 Functions

Change the definition of do_autoclass_measure in 145.2.5.6 as follows:

do_autoclass_measure

This function measures $P_{\text{Autoclass}}$ as defined in 145.2.8.2. This function returns the following variable:

$P_{\text{Autoclass}}$: The power measured by the PSE during Physical Layer classification as defined in 145.2.8.2.

Change the first sentence of the definition of do_cxn_chk in 145.2.5.6 as follows:

do_cxn_chk

This function initiates the $\text{E}_{\text{connection}}$ E_{check} as defined in 145.2.7.

Change the definition of do_initialize in 145.2.5.6 as follows:

do_initialize

This function returns the following variables (see 145.2.5.4):

alt_pri
autoclass_enable
class_4PID_mult_events_pri
class_4PID_mult_events_sec
option_2ev
option_class_probe
option_class_probe_pri
option_class_probe_sec
option_detect_ted
option_detect_ted_pri
option_detect_ted_sec
option_MEC_after_probe
option_probe_alt_sec
pse_alternative
pse_avail_pwr
pse_avail_pwr_pri
pse_avail_pwr_sec
pse_dll_capable
semi_pwr_en

Change the definition of do_update_pse_allocated_pwr_pri in 145.2.5.6 as follows:

do_update_pse_allocated_pwr_pri

A function that updates the $\text{pse_allocated_pwr_pri}$ value based on the value of $\text{PSEAllocatedPowerValue_alt}(X)$ as defined in Table 145–12. This function returns the following variable:

$\text{pse_allocated_pwr_pri}$: See do_classification_pri function ~~$\text{pse_allocated_pwr_pri}$ in 145.2.5.4.~~

Change the definition of `do_update_pse_allocated_pwr_sec` in 145.2.5.6 as follows:

`do_update_pse_allocated_pwr_sec`

A function that updates the `pse_allocated_pwr_sec` value based on the value of `PSEAllocatedPowerValue_alt(X)` as defined in Table 145–12. This function returns the following variable:

`pse_allocated_pwr_sec`: See `pse_allocated_pwr_sec` in 145.2.5.4145.2.5.6.

145.2.5.7 State diagrams

Replace part 3 of Figure 145–13, (with changed content in state `CLASS_EV1_LCE`) as shown on the following page.

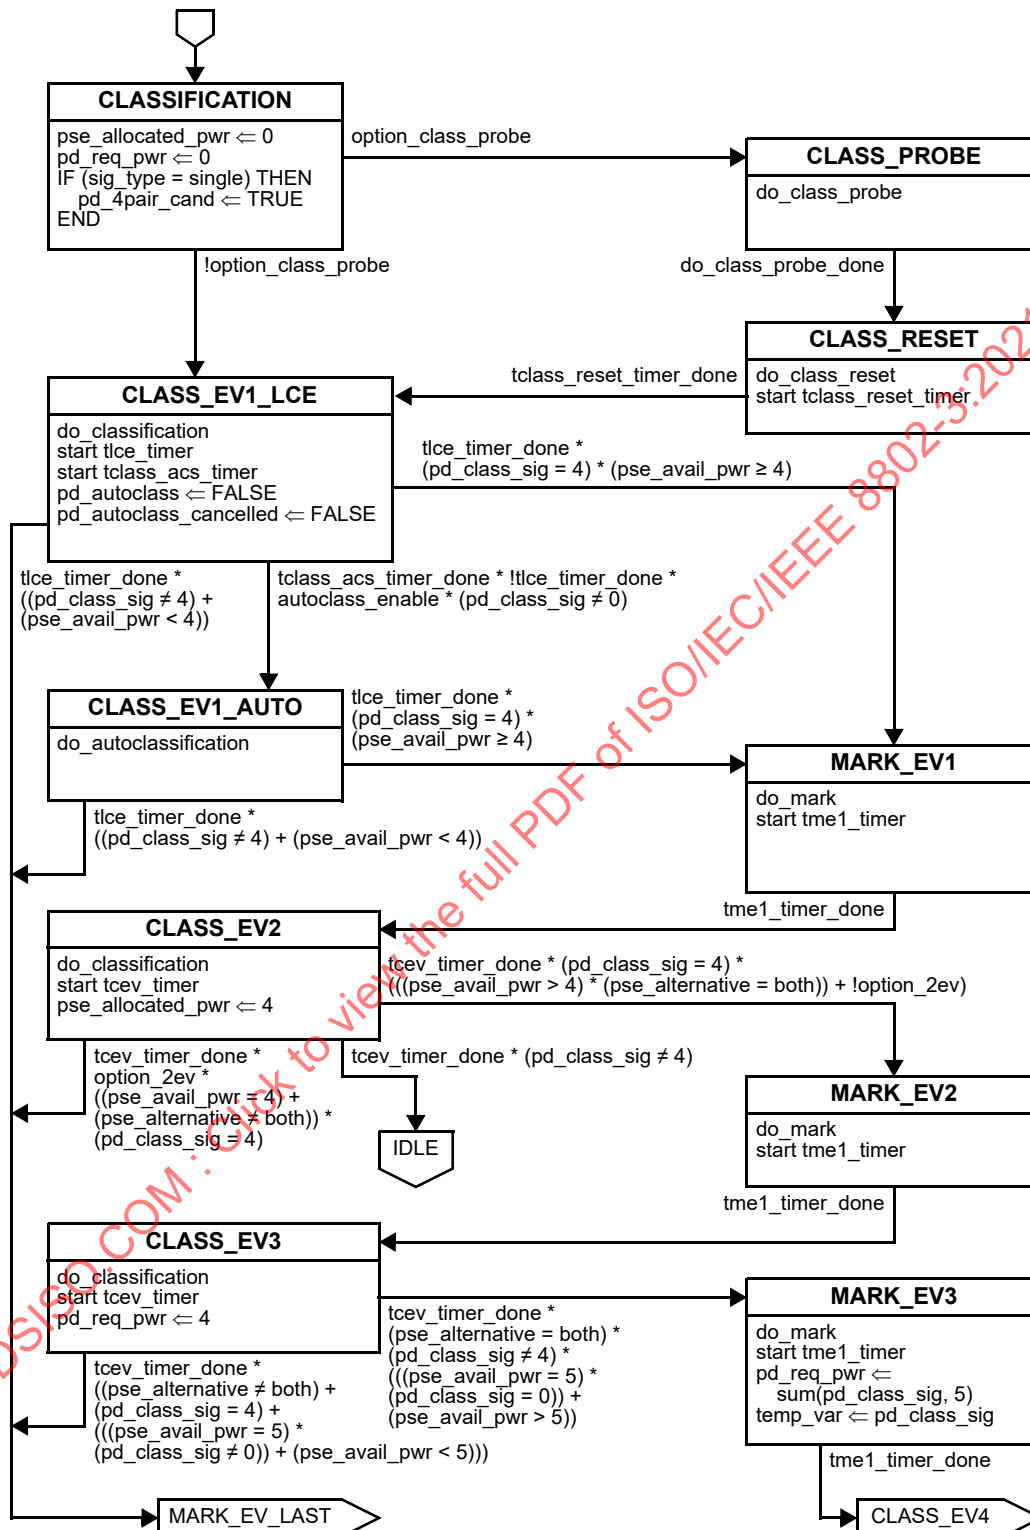


Figure 145–13—Top level PSE state diagram (continued)

Replace Figure 145–14 with the following figure:

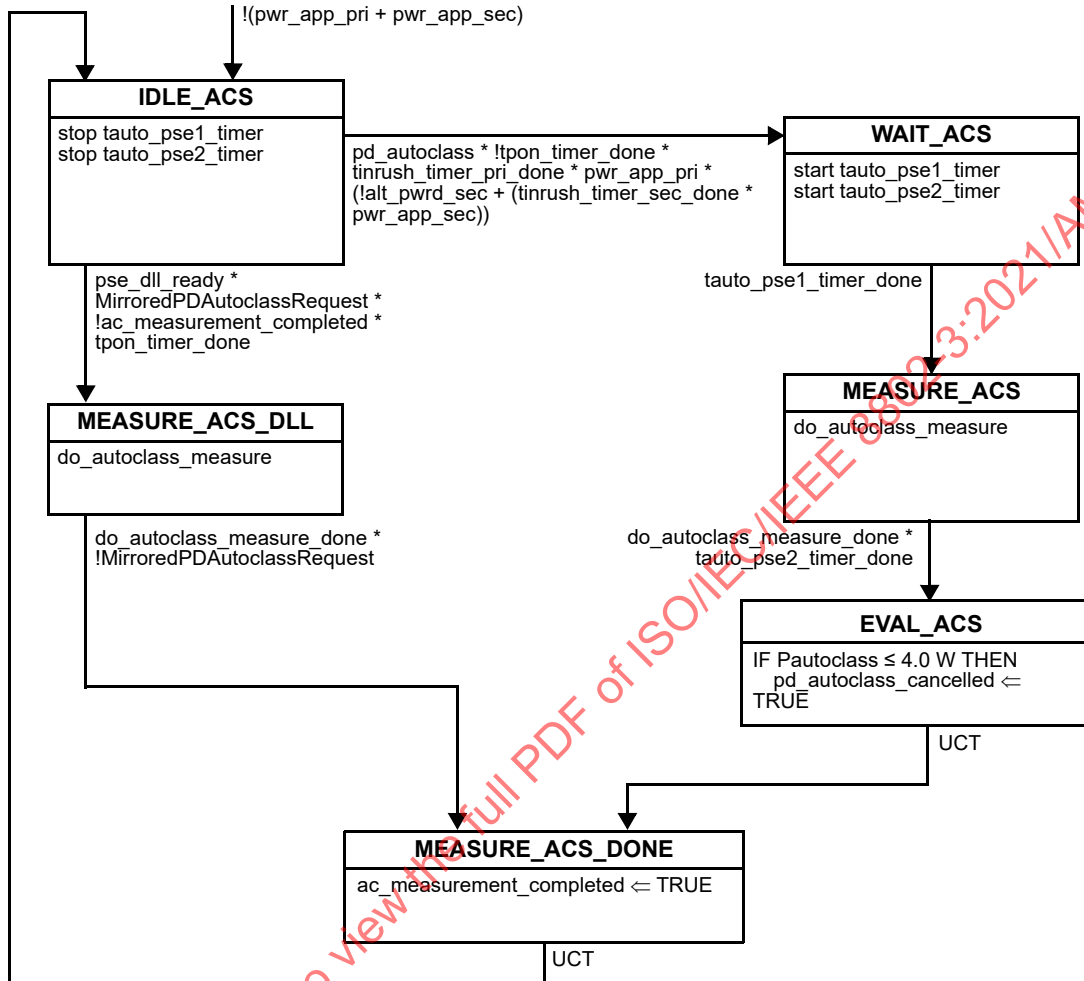


Figure 145–14—PSE Autoclass state diagram

Replace part 1 of Figure 145–15 with the following figure (with changed exit condition from *IDLE_PRI* to *START_DETECT_PRI*):

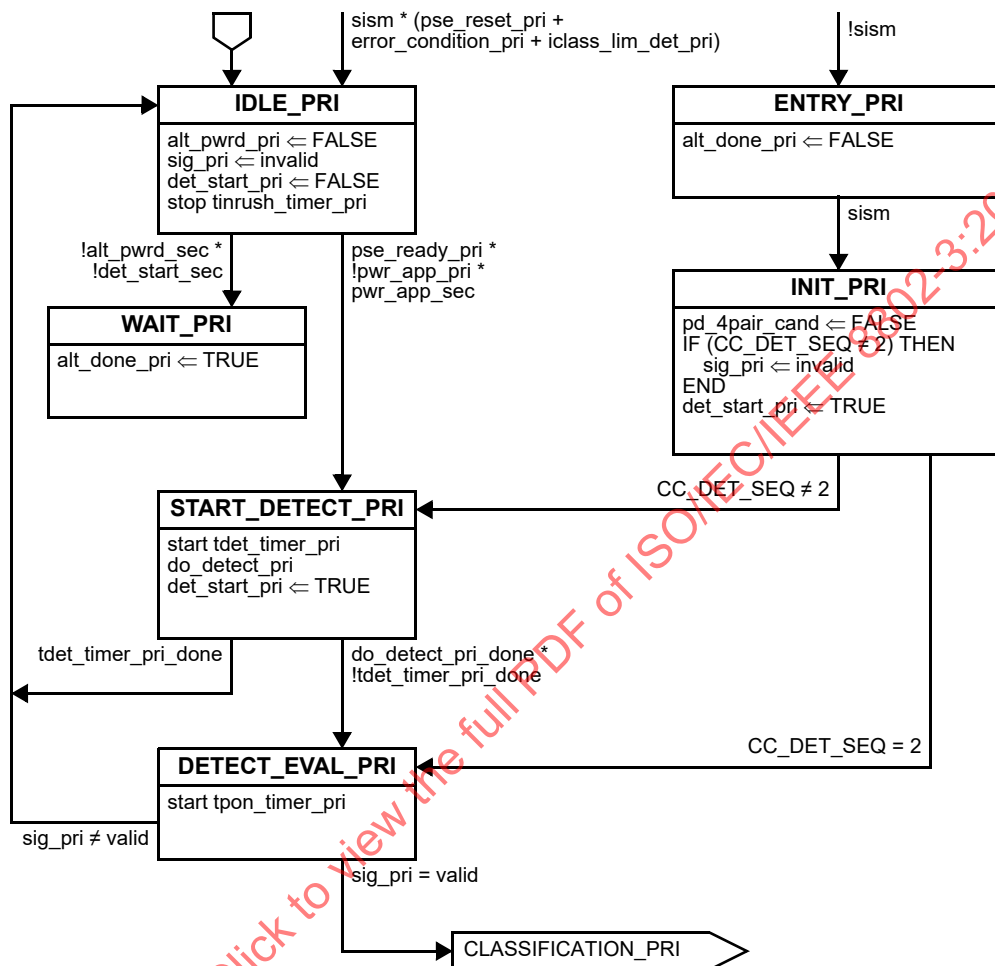


Figure 145–15—Primary Alternative dual-signature semi-independent PSE state diagram

Replace part 2 of Figure 145–15 (with changed exit conditions from *CLASS_PROBE_PRI*) as shown on the following page.

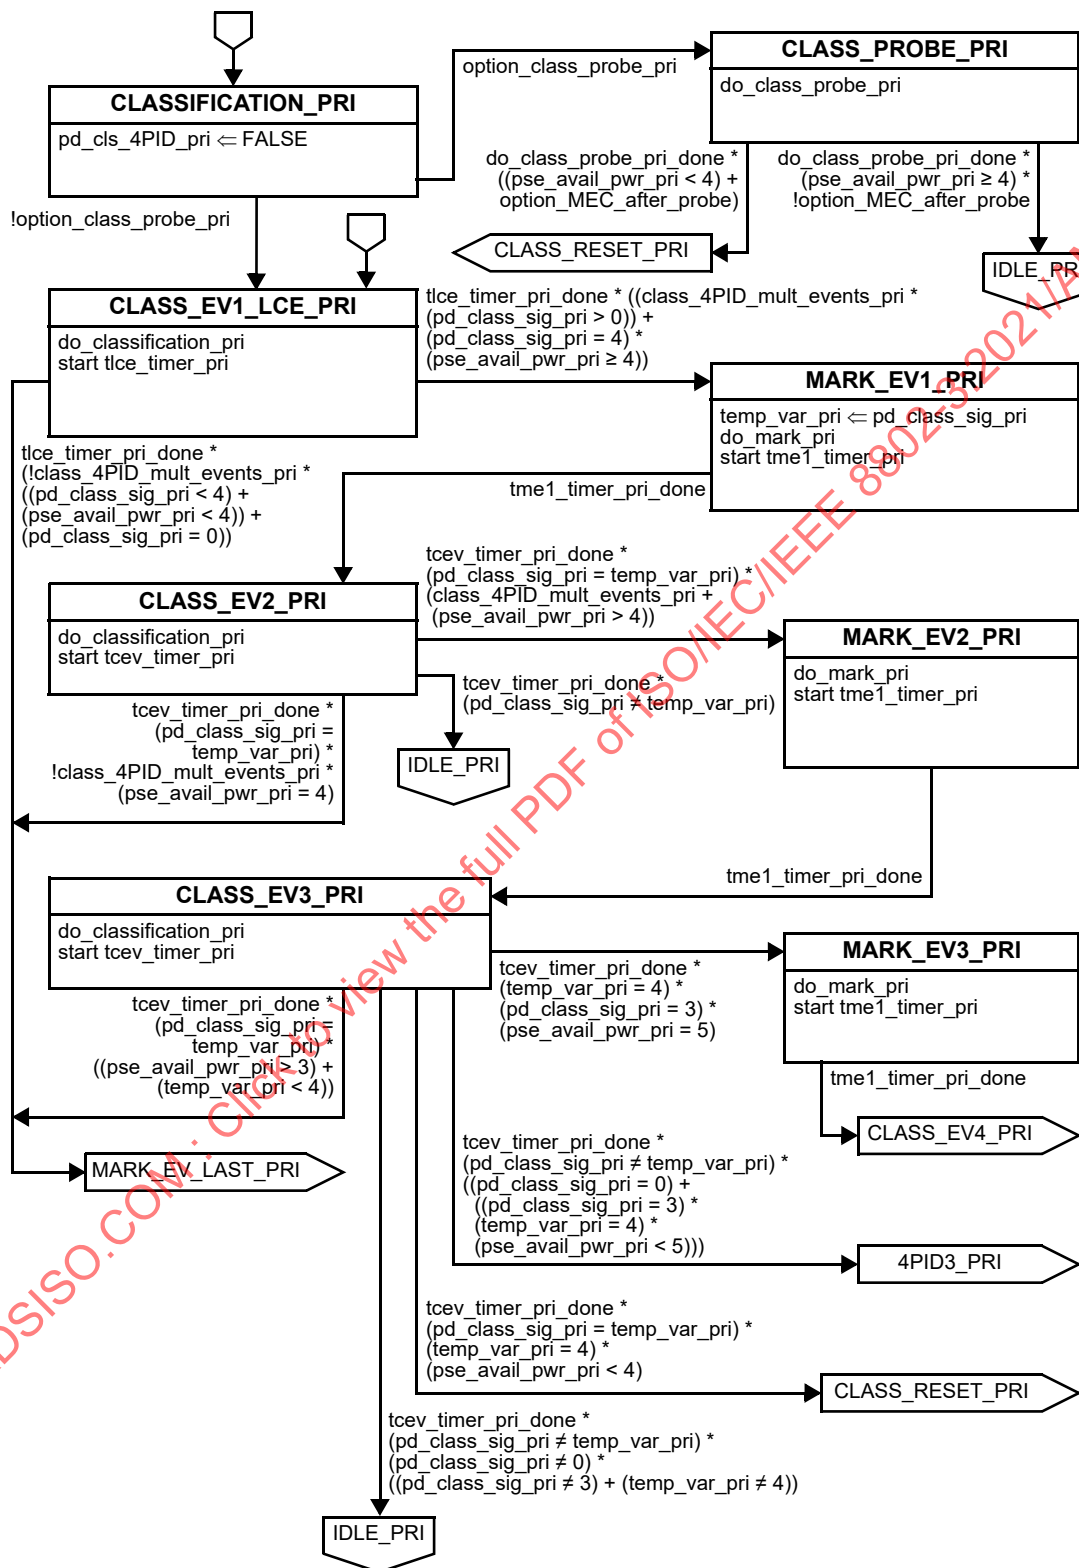


Figure 145-15—Primary Alternative dual-signature semi-independent PSE state diagram (continued)

Replace part 3 of Figure 145–15 with the following figure (with changed exit conditions from CLASS_RESET_PRI):

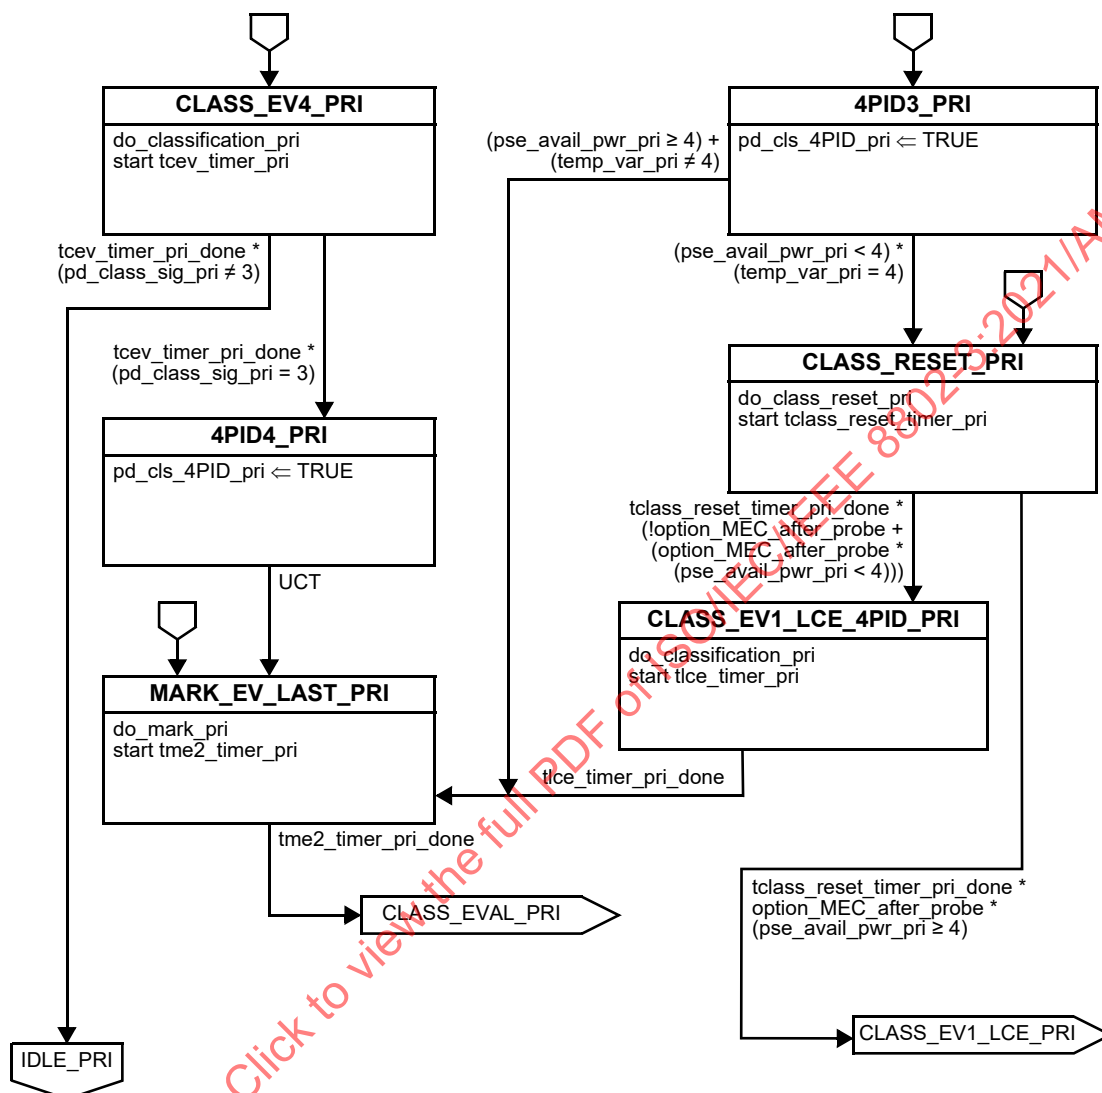


Figure 145–15—Primary Alternative dual-signature semi-independent PSE state diagram (continued)

Diagram 1: State transition diagram for the 4PID3 state machine. The diagram shows the following states and transitions:

- CLASSIFICATION_SEC**:
 - Initial state.
 - pd_cls_4PID_sec \leftarrow FALSE
 - !option_class_probe_sec \rightarrow CLASS_EV1_LCE_SEC
 - option_class_probe_sec \rightarrow CLASS_PROBE_SEC
- CLASS_PROBE_SEC**:
 - do_class_probe_sec
 - do_class_probe_sec_done * ((pse_avail_pwr_sec < 4) + option_MEC_after_probe) \rightarrow CLASS_EV1_LCE_SEC
 - do_class_probe_sec_done * (pse_avail_pwr_sec \geq 4) * !option_MEC_after_probe \rightarrow IDLE_SEC
- CLASS_EV1_LCE_SEC**:
 - do_classification_sec
 - start tlice_timer_sec
 - tlice_timer_sec_done * (!class_4PID_mult_events_sec * (pd_class_sig_sec > 0)) + (pd_class_sig_sec = 4) * (pse_avail_pwr_sec \geq 4)) \rightarrow CLASS_EV2_SEC
 - tlice_timer_sec_done * (!class_4PID_mult_events_sec * (pd_class_sig_sec < 4) + (pse_avail_pwr_sec < 4)) + (pd_class_sig_sec = 0) \rightarrow CLASS_PROBE_SEC
- CLASS_EV2_SEC**:
 - do_classification_sec
 - start tcev_timer_sec
 - tcev_timer_sec_done * (pd_class_sig_sec = temp_var_sec) * !class_4PID_mult_events_sec * (pse_avail_pwr_sec = 4) \rightarrow IDLE_SEC
 - tcev_timer_sec_done * (pd_class_sig_sec \neq temp_var_sec) \rightarrow CLASS_EV3_SEC
- CLASS_EV3_SEC**:
 - do_classification_sec
 - start tcev_timer_sec
 - tcev_timer_sec_done * (pd_class_sig_sec = temp_var_sec) * ((pse_avail_pwr_sec > 3) + (temp_var_sec < 4)) \rightarrow MARK_EV_LAST_SEC
 - tcev_timer_sec_done * (pd_class_sig_sec \neq temp_var_sec) * ((pd_class_sig_sec = 0) + ((pd_class_sig_sec = 3) * (temp_var_sec = 4) * (pse_avail_pwr_sec < 5))) \rightarrow CLASS_EV4_SEC
 - tcev_timer_sec_done * (pd_class_sig_sec = temp_var_sec) * (temp_var_sec = 4) * (pse_avail_pwr_sec < 4) \rightarrow CLASS_RESET_SEC
 - tcev_timer_sec_done * (pd_class_sig_sec \neq temp_var_sec) * (pd_class_sig_sec \neq 0) * ((pd_class_sig_sec \neq 3) + (temp_var_sec \neq 4)) \rightarrow IDLE_SEC
- MARK_EV1_SEC**:
 - temp_var_sec \leftarrow pd_class_sig_sec
 - do_mark_sec
 - start tme1_timer_sec
 - tme1_timer_sec_done \rightarrow CLASS_EV2_SEC
- MARK_EV2_SEC**:
 - do_mark_sec
 - start tme1_timer_sec
 - tme1_timer_sec_done \rightarrow CLASS_EV3_SEC
- MARK_EV3_SEC**:
 - do_mark_sec
 - start tme1_timer_sec
 - tme1_timer_sec_done \rightarrow CLASS_EV4_SEC
- CLASS_EV4_SEC**:
 - 4PID3_SEC
- CLASS_RESET_SEC**:
 - CLASS_RESET_SEC
- MARK_EV_LAST_SEC**:
 - MARK_EV_LAST_SEC
- IDLE_SEC**:
 - Final state.

31
Copyright © 2021 IEEE. All rights reserved.

Replace part 3 of Figure 145–16 with the following figure (with changed exit conditions from CLASS_RESET_SEC):

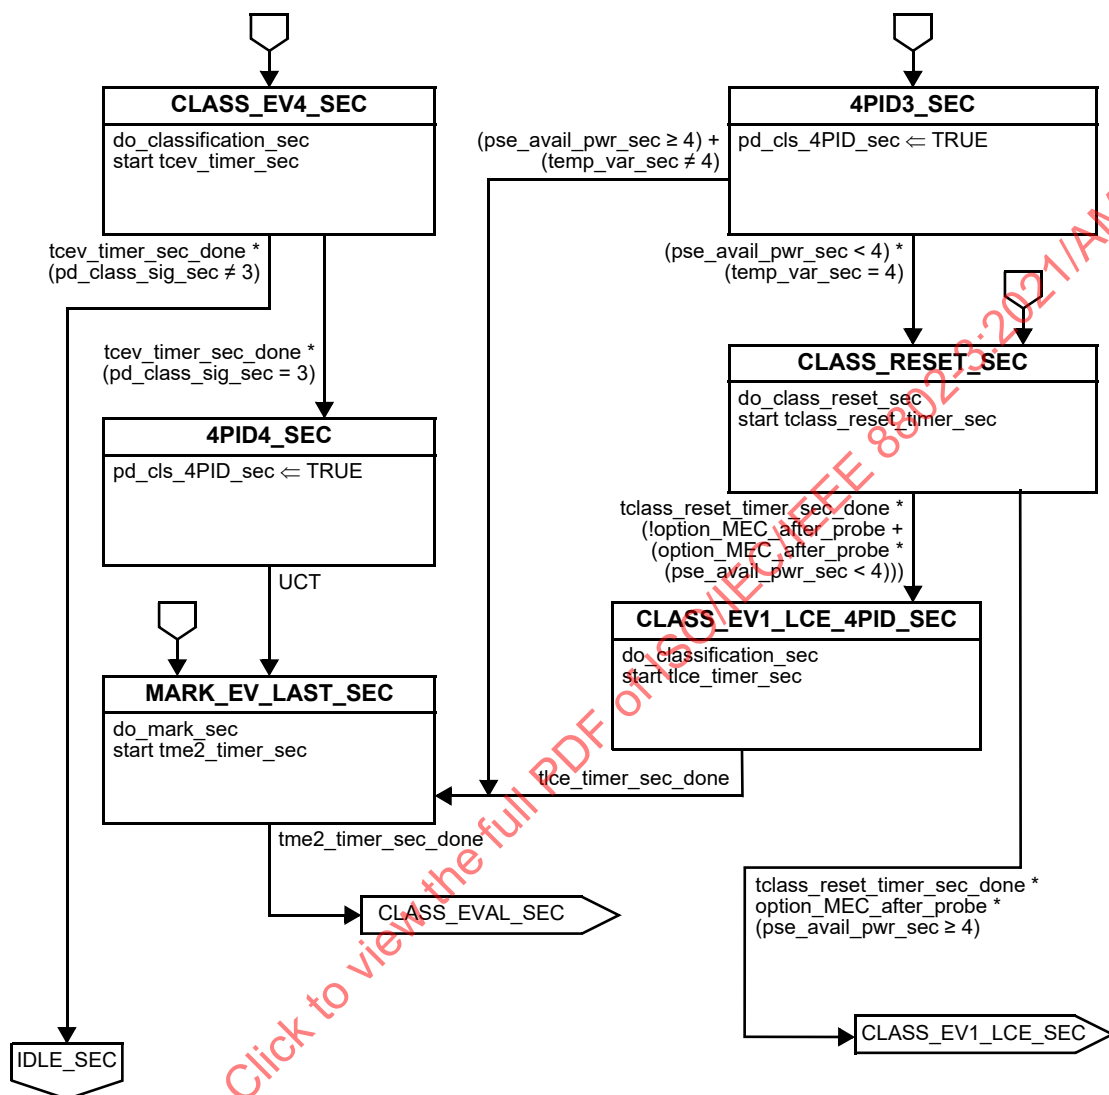


Figure 145–16—Secondary Alternative dual-signature semi-independent PSE state diagram (continued)

145.2.8 PSE classification of PDs and mutual identification

Change the tenth paragraph of 145.2.8 as follows:

If the PD connected to the PSE performs Autoclass (see 145.2.8.2 and 145.3.6.2), the PSE may set the minimum supported output power based on $P_{\text{Autoclass}}$, the power drawn during the Autoclass measurement window. $P_{\text{Autoclass}}$ shall be increased by at least $P_{\text{ac_margin}}$, as defined in Table 145–15, in order to account for potential increase in link section resistance due to temperature increase, up to the value defined in Table 145–11 of the Class assigned to the PD, and with a minimum power allocation of Class 1. If $P_{\text{Autoclass}}$ is less than or equal to 4 W then the minimum supported output power shall be P_{Class} per the assigned Class.

Replace Equation (145–4) with the following equation:

$$P_{\text{ac_extra}} = \left\{ \left(\frac{P_{\text{Autoclass}}}{V_{\text{Port_PSE-2P min}}} \right)^2 \times \frac{R_{\text{Ch}}}{2} \right\} \quad (145-4)$$

145.2.8.1 PSE Multiple-Event Physical Layer classification

Change the third paragraph from the end of 145.2.8.1 as follows:

If any measured I_{Class} is equal to or greater than $I_{\text{Class_LIM min}}$, a PSE ~~shall return~~ to IDLE, IDLE_PRI, or IDLE_SEC as appropriate. The PSE shall limit class event currents to $I_{\text{Class_LIM}}$ and shall limit mark event currents to $I_{\text{Mark_LIM}}$.

Change the second paragraph from the end of 145.2.8.1 as follows:

All class event voltages and mark event voltages shall have the same polarity as defined for $V_{\text{Port_PSE-2P}}$ in 145.2.4. PSEs may issue class events on one or both pairsets, when connected to a single-signature PD and operating over 4 pairs. The PSE shall complete Multiple-Event Physical Layer classification and transition to POWER_ON, POWER_ON_PRI, or POWER_ON_SEC without allowing the voltage at the PI or pairset to go below $V_{\text{Mark min}}$, unless in CLASS_RESET, CLASS_RESET_PRI, or CLASS_RESET_SEC. If the PSE returns to IDLE, it shall maintain the PI voltage in the range of V_{Reset} for a period of at least $T_{\text{Reset min}}$ before starting a new detection cycle. If the PSE returns to IDLE_PRI or IDLE_SEC, it shall maintain the PI voltage on the corresponding pairset in the range of V_{Reset} for a period of at least $T_{\text{Reset min}}$ before starting a new detection cycle. If the PSE is in any of the CLASS_RESET states it shall maintain the PI or pairset voltage in the range of V_{Reset} for a period of at least $T_{\text{Reset min}}$.

145.3 Powered devices (PDs)**145.3.3 PD state diagrams****145.3.3.3 Single-signature PD state diagrams****145.3.3.3.2 Variables**

Insert new variable `pd_acs_cancel` after variable `nopower` as follows:

`pd_acs_cancel`

This variable indicates that the PD is aborting the Autoclass procedure. See 145.3.6.2.

Values:

| | |
|--------|---|
| FALSE: | The PD does not abort the Physical Layer Autoclass procedure. |
| TRUE: | The PD aborts the Physical Layer Autoclass procedure. |

145.3.3.3.5 State diagrams

Replace part 1 of Figure 145–25 with the following (with changed content in DO_CLASS_EVENT_AUTO):

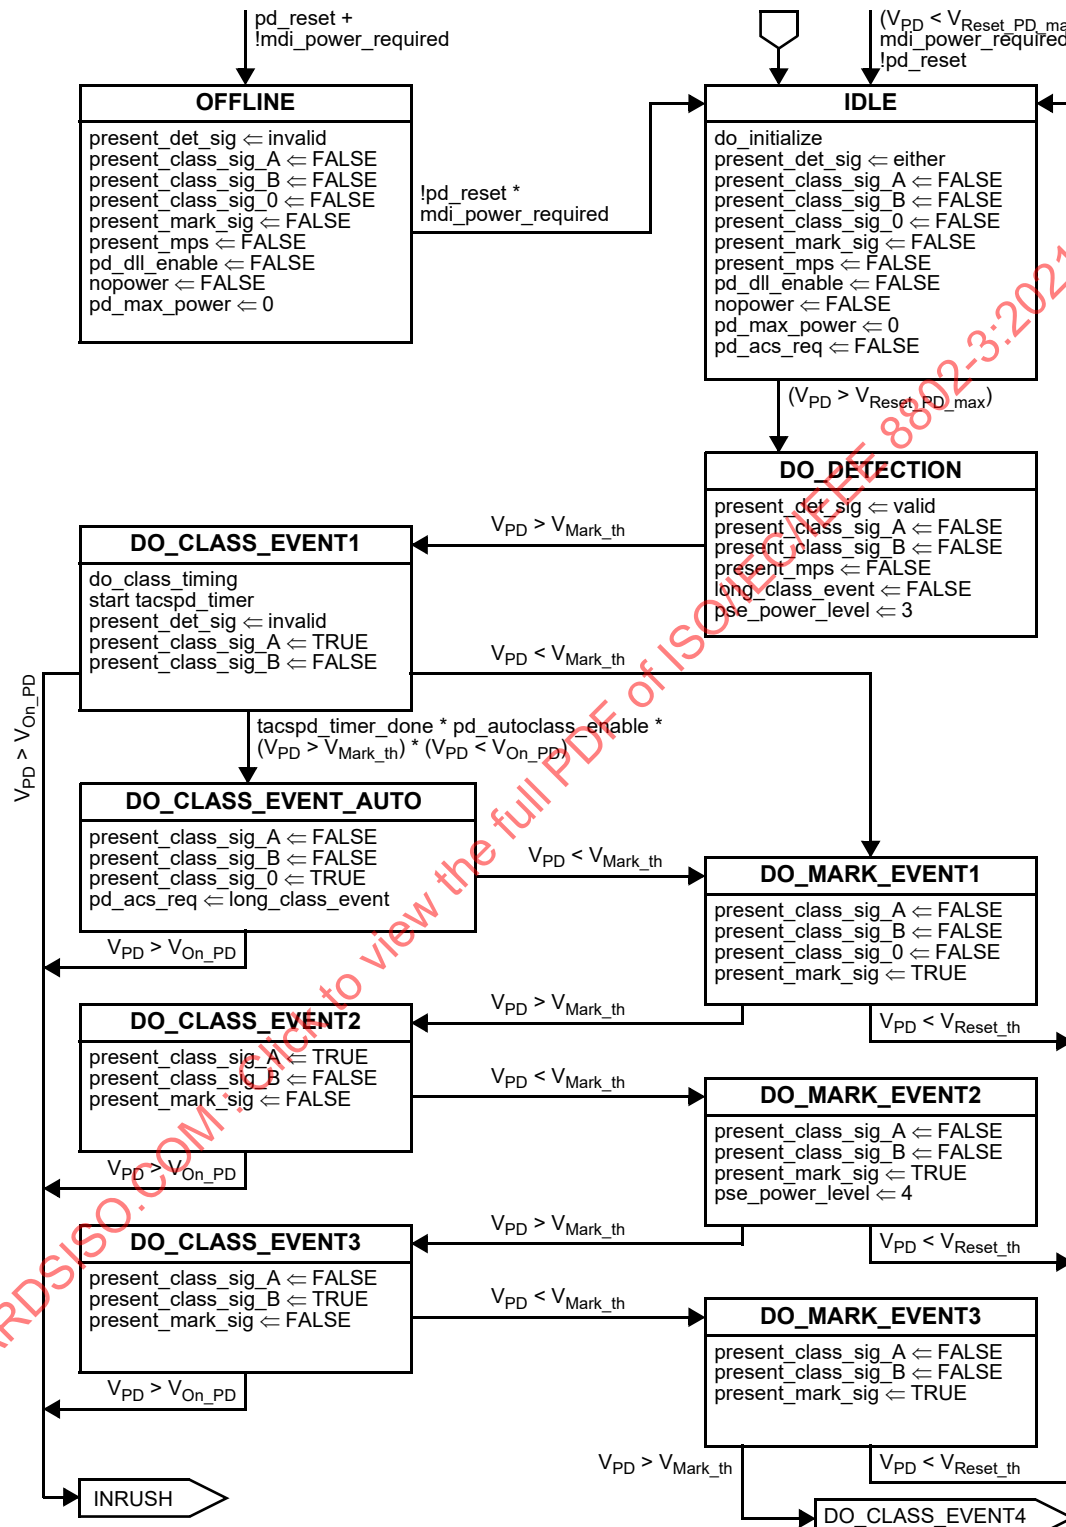


Figure 145–25—Single-signature PD state diagram

Replace Figure 145–26 with the following:

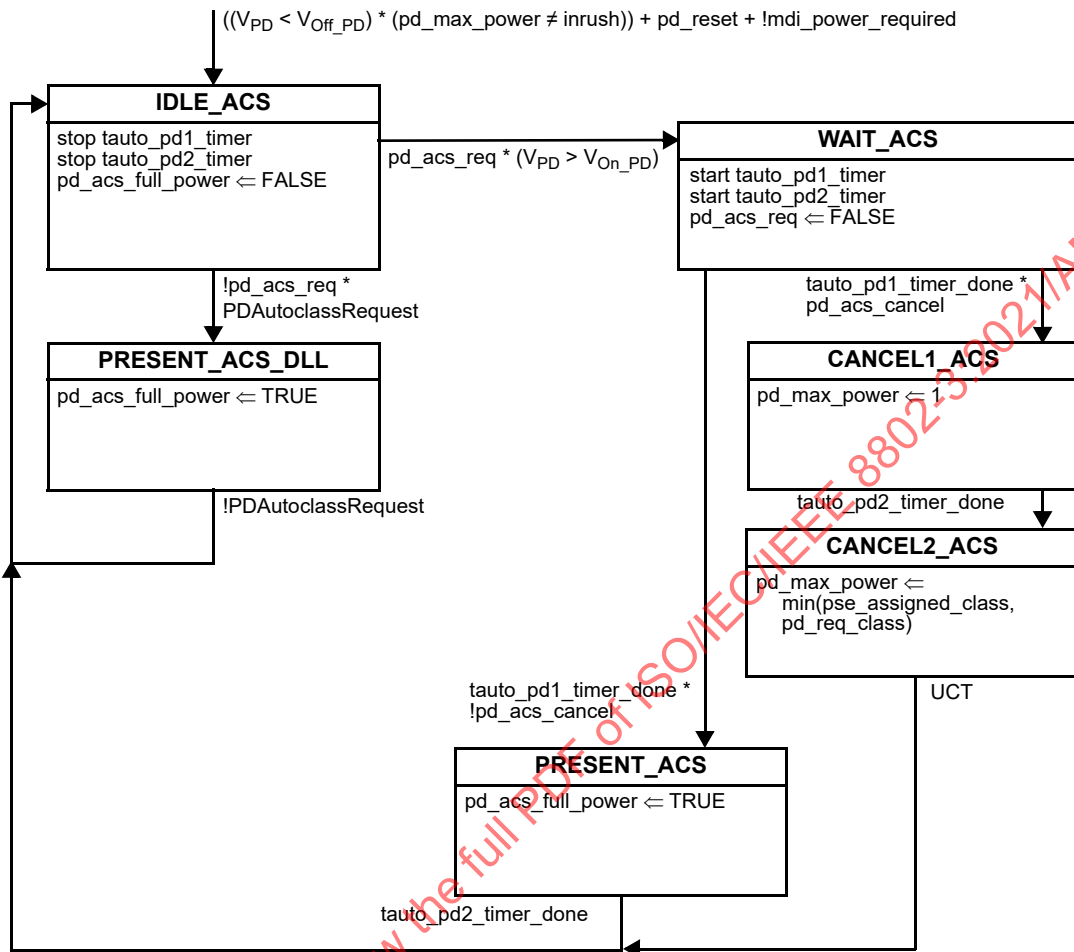


Figure 145–26—Single-signature PD Autoclass state diagram

145.3.3.4 Dual-signature PD state diagram

145.3.3.4.5 State diagram

Replace part 2 of Figure 145–27 with the following (with changed content in state POWERED):

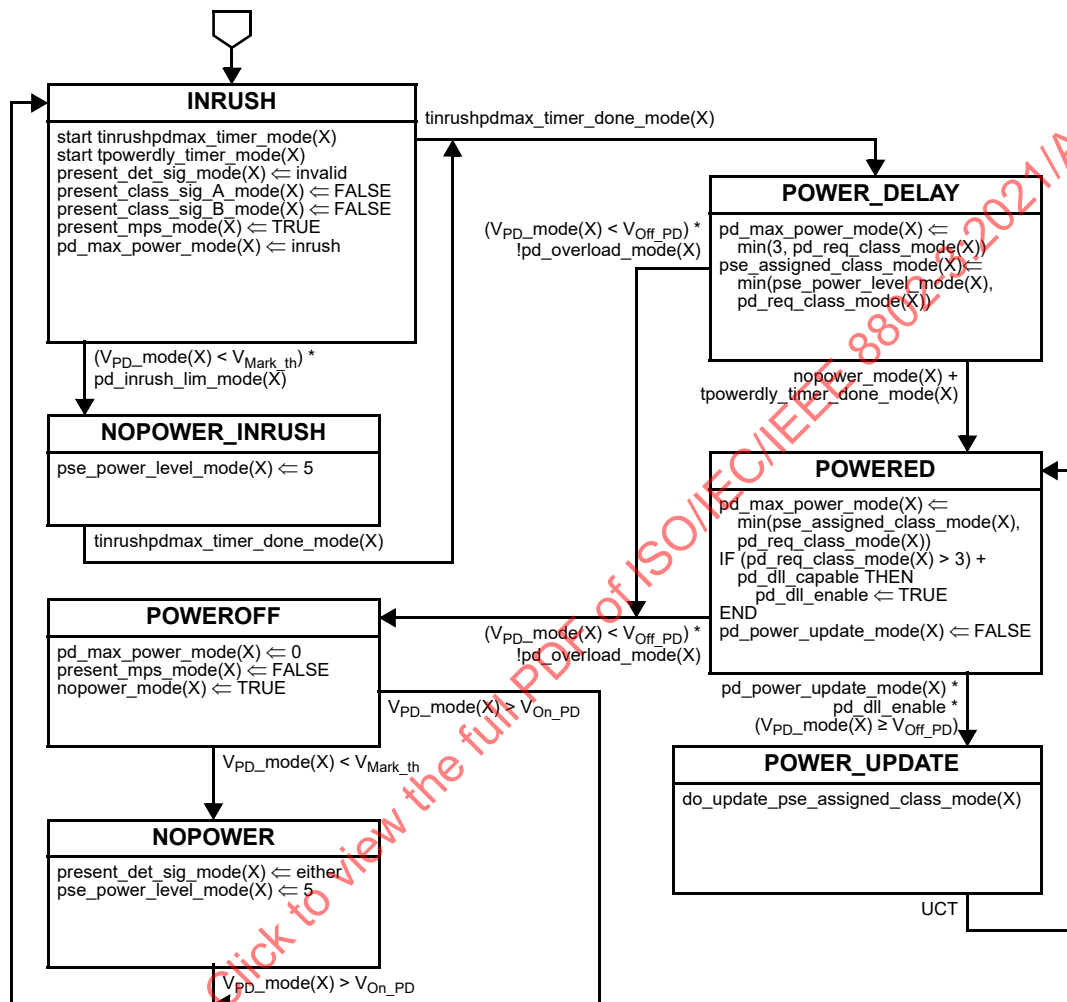


Figure 145–27—Dual-signature PD state diagram (continued)

145.3.6 PD classification

145.3.6.2 Autoclass (optional)

Change the third paragraph of 145.3.6.2 as follows:

After power up, a PD that implements Autoclass shall draw its highest required power, $P_{\text{Autoclass_PD}}$, subject to the requirements on $P_{\text{Class_PD}}$ in 145.3.8.4, throughout the period bounded by $T_{\text{AUTO_PD1}}$ and $T_{\text{AUTO_PD2}}$, measured from when V_{PD} rises above $V_{\text{On_PD}}$. The PD is restricted to a maximum power draw of $P_{\text{Autoclass_PD}}$ until the PD successfully negotiates a higher power level through Data Link Layer classification as defined in 145.5. A PD that draws less than $P_{\text{Class_PD_max}}$ for Class 1 during the period