

SAE-AS33671

ADOPTION NOTICE

SAE-AS33671, "Strap, Tiedown, Electrical Components, Adjustable Self-Clinching, Plastic, Type I, Class 1", was adopted on August 25, 1998, for use by the Department of Defense (DoD). Proposed changes by DoD activities must be submitted to the DoD Adopting Activity: Commander, Naval Air Warfare Center Aircraft Division, Code 414100B120-3, Highway 547, Lakehurst, NJ 08733-5100. DoD activities may obtain copies of this standard from the DODSSP, Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111-5094. The private sector and other government agencies may purchase copies from SAE, 400 Commonwealth Drive, Warrendale, PA 15096.

SAE-AS33671 should be used for new design instead of MS3367, which was inactivated for new design on August 25, 1998.

Custodians:
Army - CR
Air Force - 85

Adopting Activity
Navy - AS

(Project 5975-1323)

FSC 5975

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

REV.
A

AS33671

Submitted for recognition as an American National Standard

FEDERAL SUPPLY CLASS
5975

NOTICE

THIS DOCUMENT HAS BEEN TAKEN DIRECTLY FROM U.S. MILITARY SPECIFICATION MS3367F AND CONTAINS ONLY MINOR EDITORIAL AND FORMAT CHANGES REQUIRED TO BRING IT INTO CONFORMANCE WITH THE PUBLISHING REQUIREMENTS OF SAE TECHNICAL STANDARDS. THE INITIAL RELEASE OF THIS DOCUMENT IS INTENDED TO REPLACE MS3367F. ANY PART NUMBERS ESTABLISHED BY THE ORIGINAL SPECIFICATION REMAIN UNCHANGED.

THE ORIGINAL MILITARY SPECIFICATION WAS ADOPTED AS AN SAE STANDARD UNDER THE PROVISIONS OF THE SAE TECHNICAL STANDARDS BOARD (TSB) RULES AND REGULATIONS (TSB 001) PERTAINING TO ACCELERATED ADOPTION OF GOVERNMENT SPECIFICATIONS AND STANDARDS. TSB RULES PROVIDE FOR (A) THE PUBLICATION OF PORTIONS OF UNREVISED GOVERNMENT SPECIFICATIONS AND STANDARDS WITHOUT CONSENSUS VOTING AT THE SAE COMMITTEE LEVEL, AND (B) THE USE OF THE EXISTING GOVERNMENT SPECIFICATION OR STANDARD FORMAT.

ANY MATERIAL RELATING TO QUALIFIED PRODUCT LISTS HAS NOT BEEN ADOPTED BY SAE. THIS MATERIAL WAS PART OF THE ORIGINAL MILITARY SPECIFICATION AND IS REPRINTED HERE FOR HISTORIC REFERENCE ONLY.

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

SAENORM.COM : Click to view the full PDF of as33671a

ISSUED 1997-09 REVISED 1998-01

PREPARED BY SUBCOMMITTEE AE-8A

PROCUREMENT SPECIFICATION MIL-S-23190

SAE The Engineering Society
For Advancing Mobility
Land Sea Air and Space
INTERNATIONAL
400 Commonwealth Drive, Warrendale, PA 15096-0001

AEROSPACE STANDARD

STRAP, TIEDOWN, ELECTRICAL
COMPONENTS, ADJUSTABLE, SELF-
CLINCHING, PLASTIC, TYPE I, CLASS 1

AS33671
SHEET 1 OF 4

REV.
A

Copyright 1998 Society of Automotive Engineers, Inc.
All rights reserved.

Printed in the U.S.A.

QUESTIONS REGARDING THIS DOCUMENT:
TO PLACE A DOCUMENT ORDER:

(724) 772-8510
(724) 776-4970

FAX: (724) 776-0243

Distributed under license from the IHS Archive

SAE WEB ADDRESS: <http://www.sae.org>

REV.
A

AS33671

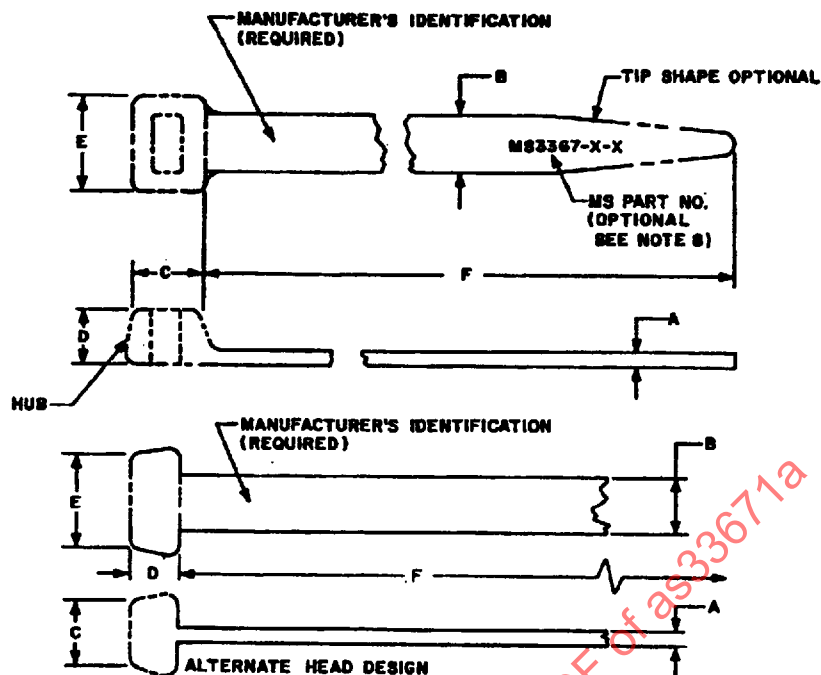


TABLE I

DASH NUMBER	BUNDLE DIA INCH		A	B	C	D	E	F	MIN. TENSILE STRENGTH LB.	STRAP IDENTIFICATION CODE (SEE NOTE 9)	MS INSTALLATION TOOL	TOOL TENSION SETTING RANGE (SEE NOTES 6 AND 10)
	MIN	MAX	MAX	MAX	MAX	MAX	MAX	MIN				
-1	1/16	1-3/4	.055	.190	.275	.240	.320	6.30	50	STD (Standard)	MS90387-1	6 to 8
-2	1/16	4	.055	.192	.275	.240	.365	13.35	50	STD (Standard)	MS90387-1	6 to 8
-3	3/16	3-1/2	.083	.310	.375	.330	.535	12.00	120	HVY (Heavy)	MS90387-2	5 to 8
-4	1/16	5/8	.046	.100	.175	.170	.195	2.72	18	MIN (Miniature)	MS90387-1	1 to 3
-5	1/16	1-1/4	.055	.146	.220	.200	.260	4.68	30	INT (Intermediate)	MS90387-1	3 to 5
-6	3/16	8	.083	.310	.375	.330	.550	26.25	120	HVY (Heavy)	MS90387-2	5 to 8
-7	1/16	3	.055	.192	.275	.240	.365	10.20	50	STD (Standard)	MS90387-1	6 to 8

REV.
A

AS33671

INCH	MM	INCH	MM	INCH	MM	INCH	MM
.046	1.17	.192	4.88	.363	9.27	4	101.60
.053	1.40	.195	4.95	.375	9.53	4.68	118.87
.0625	1.59	.200	5.08	.385	9.78	6.30	160.02
.083	2.11	.220	5.59	.400	10.16	8	203.20
.100	2.54	.240	6.10	.425	10.80	10.20	259.08
.146	3.71	.260	6.60	1.25	31.75	12.00	304.80
.170	4.32	.275	6.99	1.75	44.45	13.35	339.09
.175	4.45	.310	7.87	2.72	69.09	26.25	666.75
.1875	4.76	.320	8.13	3	76.20		
.190	4.83	.330	8.38	3.5	88.90		

TABLE II

COLOR DASH NO.	COLOR	COLOR DASH NO.	COLOR
-0 1/	BLACK	-5	GREEN
-1	BROWN	-6	BLUE
-2	RED	-7	PURPLE
-3	ORANGE	-8	GRAY
-4	YELLOW	-9 1/	NATURAL

1/ ONLY STRAPS IN NATURAL AND BLACK COLORS SHALL BE STOCKED BY THE GOVERNMENT.

TABLE III

SUPERSESION BY PART NUMBER		
PART NO.	PART NO.	PART NO. 2/
MS3367	MS17821	MS18034
MS3367-1	MS17821-1	MS18034-1
MS3367-2	MS17821-2	MS18034-2
MS3367-3	MS17821-3	MS18034-3
MS3367-4	MS17821-4	MS18034-4
MS3367-5	-----	MS18034-5
MS3367-6	-----	MS18034-6
MS3367-7	-----	MS18034-7

2/ SUPERSEDED MS18034 COLORED STRAPS WERE DESIGNATED BY ALPHABETICAL DESIGNATORS IN LIEU OF NUMERICAL DESIGNATORS AS SHOWN IN TABLE II.

REQUIREMENTS:

1. MATERIAL: (a) STRAP: NYLON, PER MIL-M-20693, TYPE I, OR TYPE III, EXCEPT FOR BLACK WHICH SHALL BE TYPE II (WEATHER RESISTANT).
- (b) STRAP LOCK: (1) METAL, TYPE PER QQ-S-766, CLASS 301 or 302 (SEE NOTE 5).
- (2) PLASTIC, TYPE PER MIL-M-20693, TYPE I, OR TYPE III, EXCEPT FOR BLACK WHICH SHALL BE TYPE II (WEATHER RESISTANT) (SEE NOTE 5)
- (c) COLOR: (1) COLOR SHALL CONFORM TO MIL-STD-104, EXCEPT BLACK AND NATURAL.

NOTES:

1. ALL DIMENSIONS ARE IN INCHES.
2. STRAPS SHALL HAVE NO BURRS, SHARP EDGES OR SHARP CORNERS.
3. METRIC EQUIVALENTS (TO THE NEAREST .01 mm) ARE GIVEN FOR GENERAL INFORMATION ONLY AND ARE BASED UPON 1 INCH = 25.4 mm.
4. THE GOVERNMENT HAS A ROYALTY FREE LICENSE UNDER THE FOLLOWING U.S. PATENT AND U.S. PATENT APPLICATION NUMBERS 3,022,557; 3,186,047; 173,866; 178,331; FOR THE BENEFIT OF MANUFACTURERS OF THE ITEMS CALLED FOR IN THIS STANDARD, EITHER FOR THE GOVERNMENT OR FOR USE IN EQUIPMENT TO BE DELIVERED TO THE GOVERNMENT.
5. LOCKING DEVICES OF ANY DESIGN ARE ACCEPTABLE PROVIDED THEY MEET PERFORMANCE REQUIREMENTS OF THE PROCUREMENT SPECIFICATION. WHEN METAL LOCKING DEVICES ARE USED, THEY MUST BE SECURELY ANCHORED AND SHALL NOT BE EXPOSED OUTSIDE OF THE HUB.
6. TYPE I TIEDOWN STRAPS MAY BE USED ON WIRE BUNDLES CONTAINING SOLID DIELECTRIC COAXIAL CABLES PROVIDED THAT THE TENSION SETTING ON THE MS90387 INSTALLING TOOL IS NOT GREATER THAN THAT REQUIRED TO PREVENT AXIAL SLIPPAGE.
7. CONTOUR INDICATED BY PHANTOM LINES MAY VARY FROM THAT SHOWN TO SUIT INDIVIDUAL MANUFACTURER'S DESIGN. SLIGHT MOLDING TAPER IS PERMITTED.

AEROSPACE STANDARD

STRAP, TIEDOWN, ELECTRICAL
COMPONENTS, ADJUSTABLE, SELF-
CLINCHING, PLASTIC, TYPE I, CLASS 1

AS33671
SHEET 3 OF 4

REV.
A